

GLOBAL
EDITION



Engineering Mechanics **DYNAMICS**

Fourteenth Edition in SI Units


R. C. Hibbeler

ALWAYS LEARNING

PEARSON

Engineering Mechanics: Dynamics

Fourteenth Edition in SI Units

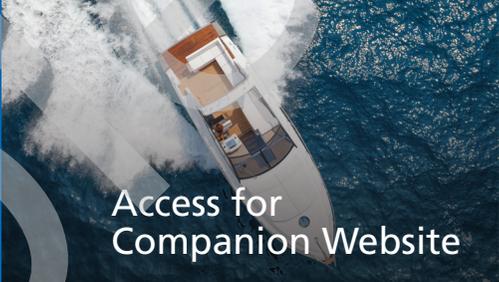

Access for
Companion Website

Thank you for purchasing a copy of *Engineering Mechanics: Dynamics*, Fourteenth Edition in SI Units, by R. C. Hibbeler. Your textbook includes 12 months of prepaid access to the book's Companion Website.

For students:

To access the Companion Website:

1. Go to www.pearsonglobaleditions.com/hibbeler.
2. Click on “Companion Website”.
3. Click on the “Register” button.
4. Follow the on-screen instructions to establish your login name and password. When prompted, enter the access code given below. Do not type the dashes.
5. Once you have registered, you can log in at any time by providing your login name and password.

The Video Solutions and Animations can be viewed on the Companion Website.

ISSEMD-GRSSS-FURRY-COUGH-LENTO-PROSE

For instructors:

To access the Instructor Resources, go to www.pearsonglobaleditions.com/hibbeler and click on “Instructor Resources”. Click on the resources (e.g., Instructor's Solutions Manual) you want to access, and you will be prompted to sign in with your login name and password. Please proceed if you already have access to the Instructor Resources.

If you do not have access, please contact your local Pearson representative.

IMPORTANT: The access code on this page can be used only once to establish a subscription to the Companion Website.

PEARSON

www.pearsonglobaleditions.com

ENGINEERING MECHANICS

DYNAMICS

FOURTEENTH EDITION IN SI UNITS

R. C. HIBBELER

SI Conversion by
Kai Beng Yap

PEARSON

Hoboken Boston Columbus San Francisco New York Indianapolis
London Toronto Sydney Singapore Tokyo Montreal Dubai Madrid
Hong Kong Mexico City Munich Paris Amsterdam Cape Town

Vice President and Editorial Director, ECS: Marcia Horton
Senior Editor: Norrin Dias
Acquisitions Editor, Global Editions: Murchana Borthakur
Editorial Assistant: Michelle Bayman
Program and Project Management Team Lead: Scott Disanno
Program Manager: Sandra L. Rodriguez
Project Manager: Rose Kernan
Project Editor, Global Editions: Donald Villamero
Art Editor: Gregory Dulles
Senior Digital Producer: Felipe Gonzalez
Operations Specialist: Maura Zaldivar-Garcia
Senior Production Manufacturing Controller, Global Editions: Trudy Kimber
Media Production Manager, Global Editions: Vikram Kumar
Product Marketing Manager: Bram Van Kempen
Field Marketing Manager: Demetrius Hall
Marketing Assistant: Jon Bryant

Cover Image: Italianvideophotoagency/Shutterstock

Pearson Education Limited
Edinburgh Gate
Harlow
Essex CM20 2JE
England

and Associated Companies throughout the world

Visit us on the World Wide Web at:
www.pearsonglobaleditions.com

© 2017 by R. C. Hibbeler

The rights of R. C. Hibbeler to be identified as the author of this work have been asserted by him in accordance with the Copyright, Designs and Patents Act 1988.

Authorized adaptation from the United States edition, entitled Engineering Mechanics: Dynamics, Fourteenth Edition, ISBN 978-0-13-391538-9, by R. C. Hibbeler, published by Pearson Education, Inc., publishing as Pearson Prentice Hall © 2016.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without either the prior written permission of the publisher or a license permitting restricted copying in the United Kingdom issued by the Copyright Licensing Agency Ltd, Saffron House, 6–10 Kirby Street, London EC1N 8TS.

Many of the designations by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and the publisher was aware of a trademark claim, the designations have been printed in initial caps or all caps.

Credits and acknowledgments borrowed from other sources and reproduced, with permission, in this textbook appear on the appropriate page within the text.

British Library Cataloguing-in-Publication Data

A catalogue record for this book is available from the British Library.

10 9 8 7 6 5 4 3 2 1

ISBN 10: 1-292-08872-9
ISBN 13: 978-1-292-08872-3

Printed and bound by L.E.G.O. S.p.A., Italy

To the Student

With the hope that this work will stimulate an interest in Engineering Mechanics and provide an acceptable guide to its understanding.

Sample

The main purpose of this book is to provide the student with a clear and thorough presentation of the theory and application of engineering mechanics. To achieve this objective, this work has been shaped by the comments and suggestions of hundreds of reviewers in the teaching profession, as well as many of the author's students.

New to this Edition

Preliminary Problems. This new feature can be found throughout the text, and is given just before the Fundamental Problems. The intent here is to test the student's conceptual understanding of the theory. Normally the solutions require little or no calculation, and as such, these problems provide a basic understanding of the concepts before they are applied numerically. All the solutions are given in the back of the text.

Expanded Important Points Sections. Summaries have been added which reinforces the reading material and highlights the important definitions and concepts of the sections.

Re-writing of Text Material. Further clarification of concepts has been included in this edition, and important definitions are now in boldface throughout the text to highlight their importance.

End-of-the-Chapter Review Problems. All the review problems now have solutions given in the back, so that students can check their work when studying for exams, and reviewing their skills when the chapter is finished.

New Photos. The relevance of knowing the subject matter is reflected by the real-world applications depicted in the over 30 new or updated photos placed throughout the book. These photos generally are used to explain how the relevant principles apply to real-world situations and how materials behave under load.

New Problems. There are approximately 30% new problems that have been added to this edition, which involve applications to many different fields of engineering.

Hallmark Features

Besides the new features mentioned above, other outstanding features that define the contents of the text include the following.

Organization and Approach. Each chapter is organized into well-defined sections that contain an explanation of specific topics, illustrative example problems, and a set of homework problems. The topics within each section are placed into subgroups defined by boldface titles. The purpose of this is to present a structured method for introducing each new definition or concept and to make the book convenient for later reference and review.

Chapter Contents. Each chapter begins with an illustration demonstrating a broad-range application of the material within the chapter. A bulleted list of the chapter contents is provided to give a general overview of the material that will be covered.

Emphasis on Free-Body Diagrams. Drawing a free-body diagram is particularly important when solving problems, and for this reason this step is strongly emphasized throughout the book. In particular, special sections and examples are devoted to show how to draw free-body diagrams. Specific homework problems have also been added to develop this practice.

Procedures for Analysis. A general procedure for analyzing any mechanical problem is presented at the end of the first chapter. Then this procedure is customized to relate to specific types of problems that are covered throughout the book. This unique feature provides the student with a logical and orderly method to follow when applying the theory. The example problems are solved using this outlined method in order to clarify its numerical application. Realize, however, that once the relevant principles have been mastered and enough confidence and judgment have been obtained, the student can then develop his or her own procedures for solving problems.

Important Points. This feature provides a review or summary of the most important concepts in a section and highlights the most significant points that should be realized when applying the theory to solve problems.

Fundamental Problems. These problem sets are selectively located just after most of the example problems. They provide students with simple applications of the concepts, and therefore, the chance to develop their problem-solving skills before attempting to solve any of the standard problems that follow. In addition, they can be used for preparing for exams.

Conceptual Understanding. Through the use of photographs placed throughout the book, theory is applied in a simplified way in order to illustrate some of its more important conceptual features and instill the physical meaning of many of the terms

used in the equations. These simplified applications increase interest in the subject matter and better prepare the student to understand the examples and solve problems.

Homework Problems. Apart from the Fundamental and Conceptual type problems mentioned previously, other types of problems contained in the book include the following:

- **Free-Body Diagram Problems.** Some sections of the book contain introductory problems that only require drawing the free-body diagram for the specific problems within a problem set. These assignments will impress upon the student the importance of mastering this skill as a requirement for a complete solution of any equilibrium problem.
- **General Analysis and Design Problems.** The majority of problems in the book depict realistic situations encountered in engineering practice. Some of these problems come from actual products used in industry. It is hoped that this realism will both stimulate the student's interest in engineering mechanics and provide a means for developing the skill to reduce any such problem from its physical description to a model or symbolic representation to which the principles of mechanics may be applied.

An attempt has been made to arrange the problems in order of increasing difficulty except for the end of chapter review problems, which are presented in random order.

- **Computer Problems.** An effort has been made to include some problems that may be solved using a numerical procedure executed on either a desktop computer or a programmable pocket calculator. The intent here is to broaden the student's capacity for using other forms of mathematical analysis without sacrificing the time needed to focus on the application of the principles of mechanics. Problems of this type, which either can or must be solved using numerical procedures, are identified by a "square" symbol (■) preceding the problem number.

The many homework problems in this edition, have been placed into two different categories. Problems that are simply indicated by a problem number have an answer and in some cases an additional numerical result given in the back of the book. An asterisk (*) before every fourth problem number indicates a problem without an answer.

Accuracy. As with the previous editions, apart from the author, the accuracy of the text and problem solutions has been thoroughly checked by four other parties: Scott Hendricks, Virginia Polytechnic Institute and State University; Karim Nohra, University of South Florida; Kurt Norlin, Bittner Development Group; and finally Kai Beng, a practicing engineer, who in addition to accuracy review provided suggestions for problem development.

Animations. On the Companion Website are seven animations identified as fundamental engineering mechanics concepts. The animations, flagged by a film icon, help students visualize the relation between mathematical explanation and real structure, breaking down complicated sequences and showing how free-body diagrams can be derived. These animations lend a graphic component in tutorials and lectures, assisting instructors in demonstrating the teaching of concepts with greater ease and clarity.

Each animation is flagged by a film icon.

254

CHAPTER 15 KINETICS OF A PARTICLE: IMPULSE AND MOMENTUM



Please refer to the Companion Website for the animation: *Impact of 2 Sliding Masses*

15.3 Conservation of Linear Momentum for a System of Particles

When the sum of the external impulses acting on a system of particles is zero, Eq. 15-6 reduces to a simplified form, namely,

$$\sum m_i(\mathbf{v}_i)_1 = \sum m_i(\mathbf{v}_i)_2 \quad (15-8)$$

This equation is referred to as the *conservation of linear momentum*. It states that the total linear momentum for a system of particles remains constant during the time period t_1 to t_2 . Substituting $m\mathbf{v}_G = \sum m_i\mathbf{v}_i$ into Eq. 15-8, we can also write

$$(\mathbf{v}_G)_1 = (\mathbf{v}_G)_2 \quad (15-9)$$




The hammer in the top photo applies an impulsive force to the stake. During this extremely short time of contact the weight of the stake can be considered nonimpulsive, and provided the stake is driven into soft ground, the impulse of the ground acting on the stake can also be considered nonimpulsive. By contrast, if the stake is used in a concrete chipper to break concrete, then two impulsive forces act on the stake: one at its top due to the chipper and the other on its bottom due to the rigidity of the concrete.

which indicates that the velocity \mathbf{v}_G of the mass center for the system of particles does not change if no external impulses are applied to the system. The conservation of linear momentum is often applied when particles collide or interact. For application, a careful study of the free-body diagram for the *entire* system of particles should be made in order to identify the forces which create either external or internal impulses and thereby determine in what direction(s) linear momentum is conserved. As stated earlier, the *internal impulses* for the system will always cancel out, since they occur in equal but opposite collinear pairs. If the time period over which the motion is studied is *very short*, some of the external impulses may also be neglected or considered approximately equal to zero. The forces causing these negligible impulses are called *nonimpulsive forces*. By comparison, forces which are very large and act for a very short period of time produce a significant change in momentum and are called *impulsive forces*. They, of course, cannot be neglected in the impulse-momentum analysis.

Impulsive forces normally occur due to an explosion or the striking of one body against another, whereas nonimpulsive forces may include the weight of a body, the force imparted by a slightly deformed spring having a relatively small stiffness, or for that matter, any force that is very small compared to other larger (impulsive) forces. When making this distinction between impulsive and nonimpulsive forces, it is important to realize that this only applies during the time t_1 to t_2 . To illustrate, consider the effect of striking a tennis ball with a racket as shown in the photo. During the *very short* time of interaction, the force of the racket on the ball is impulsive since it changes the ball's momentum drastically. By comparison, the ball's weight will have a negligible effect on the change

Instructors can demonstrate the different methods of analysis step-by-step.

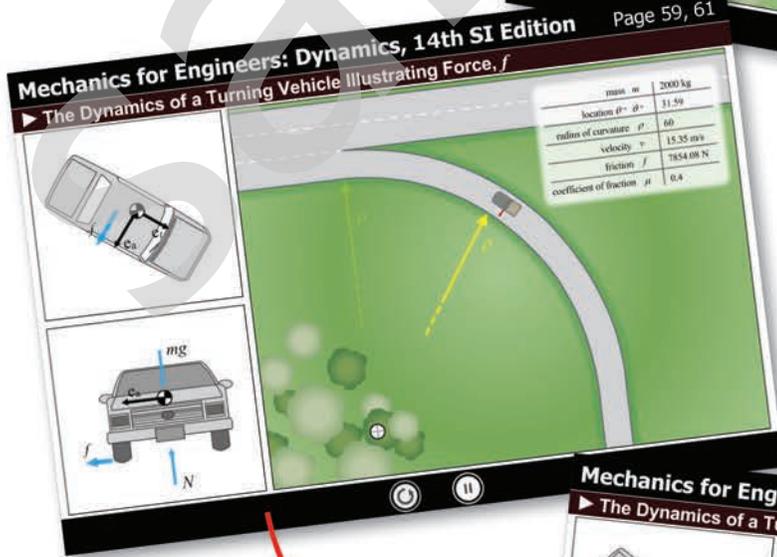

Maximize the use of class contact time.

Students can visualize how concepts are applied to the analysis of the structure.



Video Solutions. An invaluable resource in and out of the classroom, these complete solution walkthroughs of representative homework problems from each chapter offer fully worked solutions, self-paced instruction, and 24/7 accessibility. Lecturers and students can harness this resource to gain independent exposure to a wide range of examples applying formulas to actual structures.

Kinetics of a Particle: Work and Energy

CHAPTER OBJECTIVES

- To develop the principle of work and energy and apply it to solve problems that involve force, velocity, and displacement.
- To study problems that involve power and efficiency.
- To introduce the concept of a conservative force and apply the theorem of conservation of energy to solve kinetic problems.



Video Solutions are available for selected questions in this chapter.

Video solutions are available for certain questions.

14.1 The Work of a Force

In this chapter, we will analyze motion of a particle using the concepts of work and energy. The resulting equation will be useful for solving problems that involve force, velocity, and displacement. Before we do this, however, we must first define the work of a force. Specifically, a force \mathbf{F} will do work on a particle only when the particle undergoes a displacement in the direction of the force. For example, if the force \mathbf{F} in Fig. 14-1 causes the particle to move along the path s from position \mathbf{r} to a new position \mathbf{r}' , the displacement is then $d\mathbf{r} = \mathbf{r}' - \mathbf{r}$. The magnitude of $d\mathbf{r}$ is ds , the length of the differential segment along the path. If the angle between the tails of $d\mathbf{r}$ and \mathbf{F} is θ , Fig. 14-1, then the work done by \mathbf{F} is a scalar quantity, defined by

$$dU = F ds \cos \theta$$




Fig. 14-1

PEARSON ALWAYS LEARNING
VideoSolutions

Video Solution

Mass Moment of Inertia

This problem, although it looks fairly innocent, requires us to use essentially all of our inertia transformation tools for its solution. First, we break the structure into composite parts, exactly as we have done for moment of inertia calculations starting in statics. Then, for each piece, we apply coordinate rotation equations for the two centroidal coordinate systems we define for each piece. Finally, we apply the parallel axis theorem to translate the moments of inertia onto the global (x,y,z) axes defined at the centroid of the entire structure. This problem provides excellent practice and requires great attention to detail for its solution.

00:02 24:13

Independent video replays of a lecturer's explanation reinforces students' understanding.

Reduces lecturers' time spent in repetitive explanation of concepts and applications.

PEARSON ALWAYS LEARNING
VideoSolutions

Mass Moment of Inertia

The assembly consists of two square plates A and B which have a mass of 3 kg each, and a rectangular plate C which has a mass of 4.5 kg. Determine the moments of inertia I_x , I_y , and I_z .

Approach

1. find I 's for each plate (A,B,C) around local (centroidal) coordinate system.
2. use parallel axis theorem to assemble total I_x, I_y, I_z

02:59 24:13

PEARSON ALWAYS LEARNING
VideoSolutions

Mass Moment of Inertia

1. find I 's for each plate

⊕ plate C

$a = 0.4 \text{ m}$
 $b = 0.6 \text{ m}$

$$I_{zz} = \frac{1}{12} m (a^2 + b^2) = 0.195 \text{ kg-m}^2$$

$$I_{xx} = \frac{1}{12} m b^2 = 0.135 \text{ kg-m}^2$$

$$I_{yy} = \frac{1}{12} m a^2 = 0.06 \text{ kg-m}^2$$

06:00 24:13

Flexible resource for students where they can learn at a comfortable pace without relying too much on their instructors.

Contents

The book is divided into 11 chapters, in which the principles are first applied to simple, then to more complicated situations.

The kinematics of a particle is discussed in Chapter 12, followed by a discussion of particle kinetics in Chapter 13 (Equation of Motion), Chapter 14 (Work and Energy), and Chapter 15 (Impulse and Momentum). The concepts of particle dynamics contained in these four chapters are then summarized in a “review” section, and the student is given the chance to identify and solve a variety of problems. A similar sequence of presentation is given for the planar motion of a rigid body: Chapter 16 (Planar Kinematics), Chapter 17 (Equations of Motion), Chapter 18 (Work and Energy), and Chapter 19 (Impulse and Momentum), followed by a summary and review set of problems for these chapters.

If time permits, some of the material involving three-dimensional rigid-body motion may be included in the course. The kinematics and kinetics of this motion are discussed in Chapters 20 and 21, respectively. Chapter 22 (Vibrations) may be included if the student has the necessary mathematical background. Sections of the book that are considered to be beyond the scope of the basic dynamics course are indicated by a star (★) and may be omitted. Note that this material also provides a suitable reference for basic principles when it is discussed in more advanced courses. Finally, Appendix A provides a list of mathematical formulas needed to solve the problems in the book, Appendix B provides a brief review of vector analysis, and Appendix C reviews application of the chain rule.

Alternative Coverage. At the discretion of the instructor, it is possible to cover Chapters 12 through 19 in the following order with no loss in continuity: Chapters 12 and 16 (Kinematics), Chapters 13 and 17 (Equations of Motion), Chapter 14 and 18 (Work and Energy), and Chapters 15 and 19 (Impulse and Momentum).

Acknowledgments

The author has endeavored to write this book so that it will appeal to both the student and instructor. Through the years, many people have helped in its development, and I will always be grateful for their valued suggestions and comments. Specifically, I wish to thank all the individuals who have contributed their comments relative to preparing the fourteenth edition of this work, and in particular, R. Bankhead of Highline Community College, K. Cook-Chennault of Rutgers, the State University of New Jersey, E. Erisman, College of Lake County Illinois, M. Freeman of the University of Alabama, H. Lu of University of Texas at Dallas, J. Morgan of Texas A & M University, R. Neptune of the University of Texas, I. Orabi of the University of New Haven, T. Tan, University of Memphis, R. Viesca of Tufts University, and G. Young, Oklahoma State University.

There are a few other people that I also feel deserve particular recognition. These include comments sent to me by J. Dix, H. Kuhlman, S. Larwood, D. Pollock, and H. Wenzel. A long-time friend and associate, Kai Beng Yap, was of great help to me in preparing and checking problem solutions. A special note of thanks also goes to

Kurt Norlin of Bittner Development Group in this regard. During the production process I am thankful for the assistance of Martha McMaster, my copy editor, and Rose Kernan, my production editor. Also, to my wife, Conny, who helped in the preparation of the manuscript for publication.

Lastly, many thanks are extended to all my students and to members of the teaching profession who have freely taken the time to e-mail me their suggestions and comments. Since this list is too long to mention, it is hoped that those who have given help in this manner will accept this anonymous recognition.

I would greatly appreciate hearing from you if at any time you have any comments, suggestions, or problems related to any matters regarding this edition.

*Russell Charles Hibbeler
hibbeler@bellsouth.net*

Global Edition

The publishers would like to thank the following for their contribution to the Global Edition:

Contributor

Kai Beng Yap

Kai is currently a registered professional engineer who works in Malaysia. He has BS and MS degrees in Civil Engineering from the University of Louisiana, Lafayette, Louisiana; and he has done further graduate work at Virginia Polytechnic Institute in Blacksberg, Virginia. His professional experience has involved teaching at the University of Louisiana, and doing engineering consulting work related to structural analysis and design and its associated infrastructure.

Reviewers

Derek Gransden, Structural Integrity & Composites / Faculty of Aerospace Engineering, *Delft University of Technology*


Christopher Chin, National Centre for Maritime Engineering and Hydrodynamics, *University of Tasmania*

Imad Abou-Hayt, Center of Bachelor of Engineering Studies, *Technical University of Denmark*

Kris Henriouille, Mechanical Engineering Technology, *KU Leuven University*

your work...

PART A

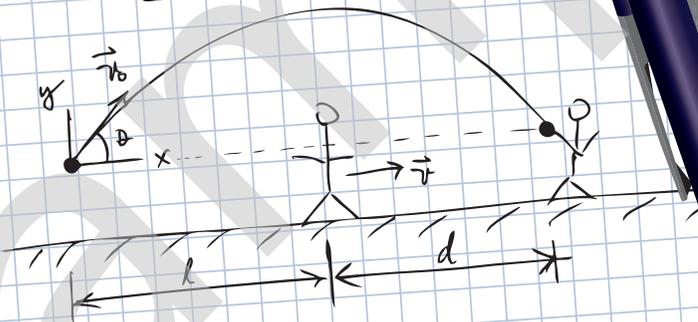

$$\text{given: } v = 7.000 \text{ m/s}; t = 2.000 \text{ s}; l = 18.00 \text{ m}$$

$$d = v \cdot t \Rightarrow d = (7.000 \text{ m/s})(2.000 \text{ s}) = 14.00 \text{ m}$$

$$x = l + d \Rightarrow x = 18.00 \text{ m} + 14.00 \text{ m} = 32.00 \text{ m}$$

$$g = 9.807 \text{ m/s}^2$$

$$v_{0x} = \frac{x}{t} = \frac{32.00 \text{ m}}{2.000 \text{ s}} = 16.00 \text{ m/s (COMP. X)}$$

$$v_{0y} = \frac{1}{2} g t = \frac{1}{2} (9.807 \text{ m/s}^2)(2.000 \text{ s}) = 9.80 \text{ m/s (COMP. Y)}$$

$$v_0 = v_{0x} + v_{0y} = 16.00 \text{ m/s} + 9.80 \text{ m/s} = 25.80 \text{ m/s (TOTAL)}$$

$$\boxed{v_0 = 25.80 \text{ m/s}}$$

your answer **specific feedback**

Express the initial speed to four significant figures in meters per second.

$v_0 =$ m/s

Calculator toolbar: $\sqrt{\square}$, $\Delta\Sigma\phi$, \updownarrow , **vec**, \leftarrow , \rightarrow , \circlearrowleft , [] , $?$

Submit [Hints](#) [My Answers](#) [Give Up](#) [Review Part](#)

Incorrect; Try Again; 5 attempts remaining

This is the sum of the components of the velocity. You need to use the Pythagorean theorem to find the total velocity.
You may need to review [Vector Magnitudes](#).

Resources for Instructors

- **MasteringEngineering.** This online Tutorial Homework program allows you to integrate dynamic homework with automatic grading and adaptive tutoring. MasteringEngineering allows you to easily track the performance of your entire class on an assignment-by-assignment basis, or the detailed work of an individual student.
- **Instructor's Solutions Manual.** This supplement provides complete solutions supported by problem statements and problem figures. The fourteenth edition manual was revised to improve readability and was triple accuracy checked. The Instructor's Solutions Manual is available on the Pearson Higher Education website: www.pearsonglobaleditions.com.
- **Instructor's Resource.** Visual resources to accompany the text are located on the Pearson Higher Education website: www.pearsonglobaleditions.com. If you are in need of a login and password for this site, please contact your local Pearson representative. Visual resources include all art from the text, available in PowerPoint and JPEG format.
- **Video Solutions.** Developed by Professor Edward Berger, Purdue University, video solutions are located in the study area of MasteringEngineering and offer step-by-step solution walkthroughs of representative homework problems. Make efficient use of class time and office hours by showing students the complete and concise problem-solving approaches that they can access any time and view at their own pace. The videos are designed to be a flexible resource to be used however each instructor and student prefers. A valuable tutorial resource, the videos are also helpful for student self-evaluation as students can pause the videos to check their understanding and work alongside the video. Access the videos at www.masteringengineering.com

Resources for Students

- **MasteringEngineering.** Tutorial homework problems emulate the instructor's office-hour environment, guiding students through engineering concepts with self-paced individualized coaching. These in-depth tutorial homework problems are designed to coach students with feedback specific to their errors and optional hints that break problems down into simpler steps.
- **Dynamics Study Pack.** This supplement contains chapter-by-chapter study materials and a Free-Body Diagram Workbook.
- **Video Solutions** Complete, step-by-step solution walkthroughs of representative homework problems. Videos offer fully worked solutions that show every step of representative homework problems—this helps students make vital connections between concepts.

Ordering Options

The *Dynamics Study Pack* and MasteringEngineering resources are available as stand-alone items for student purchase and are also available packaged with the texts.

Custom Solutions

Please contact your local Pearson sales representative for more details about custom options.

Sample

CONTENTS



12 Kinematics of a Particle 3

- Chapter Objectives 3
- 12.1 Introduction 3
- 12.2 Rectilinear Kinematics: Continuous Motion 5
- 12.3 Rectilinear Kinematics: Erratic Motion 20
- 12.4 General Curvilinear Motion 34
- 12.5 Curvilinear Motion: Rectangular Components 36
- 12.6 Motion of a Projectile 41
- 12.7 Curvilinear Motion: Normal and Tangential Components 56
- 12.8 Curvilinear Motion: Cylindrical Components 71
- 12.9 Absolute Dependent Motion Analysis of Two Particles 85
- 12.10 Relative-Motion of Two Particles Using Translating Axes 91



13 Kinetics of a Particle: Force and Acceleration 113

- Chapter Objectives 113
- 13.1 Newton's Second Law of Motion 113
- 13.2 The Equation of Motion 116
- 13.3 Equation of Motion for a System of Particles 118
- 13.4 Equations of Motion: Rectangular Coordinates 120
- 13.5 Equations of Motion: Normal and Tangential Coordinates 138
- 13.6 Equations of Motion: Cylindrical Coordinates 152
- *13.7 Central-Force Motion and Space Mechanics 164



14 Kinetics of a Particle: Work and Energy 179

- Chapter Objectives 179
- 14.1 The Work of a Force 179
- 14.2 Principle of Work and Energy 184
- 14.3 Principle of Work and Energy for a System of Particles 186
- 14.4 Power and Efficiency 204
- 14.5 Conservative Forces and Potential Energy 213
- 14.6 Conservation of Energy 217



15 Kinetics of a Particle: Impulse and Momentum 237

- Chapter Objectives 237
- 15.1 Principle of Linear Impulse and Momentum 237
- 15.2 Principle of Linear Impulse and Momentum for a System of Particles 240
- 15.3 Conservation of Linear Momentum for a System of Particles 254
- 15.4 Impact 266
- 15.5 Angular Momentum 280
- 15.6 Relation Between Moment of a Force and Angular Momentum 281
- 15.7 Principle of Angular Impulse and Momentum 284
- 15.8 Steady Flow of a Fluid Stream 295
- *15.9 Propulsion with Variable Mass 300



16 Planar Kinematics of a Rigid Body 319

- Chapter Objectives 319
- 16.1 Planar Rigid-Body Motion 319
- 16.2 Translation 321
- 16.3 Rotation about a Fixed Axis 322
- 16.4 Absolute Motion Analysis 338
- 16.5 Relative-Motion Analysis: Velocity 346
- 16.6 Instantaneous Center of Zero Velocity 360
- 16.7 Relative-Motion Analysis:
Acceleration 373
- 16.8 Relative-Motion Analysis Using Rotating
Axes 389



17 Planar Kinetics of a Rigid Body: Force and Acceleration 409

- Chapter Objectives 409
- 17.1 Mass Moment of Inertia 409
- 17.2 Planar Kinetic Equations of Motion 423
- 17.3 Equations of Motion: Translation 426
- 17.4 Equations of Motion: Rotation about a
Fixed Axis 441
- 17.5 Equations of Motion: General Plane
Motion 456



18 Planar Kinetics of a Rigid Body: Work and Energy 473

- Chapter Objectives 473
- 18.1 Kinetic Energy 473
- 18.2 The Work of a Force 476
- 18.3 The Work of a Couple Moment 478
- 18.4 Principle of Work and Energy 480
- 18.5 Conservation of Energy 496



19 Planar Kinetics of a Rigid Body: Impulse and Momentum 517

- Chapter Objectives 517
- 19.1 Linear and Angular Momentum 517
- 19.2 Principle of Impulse and Momentum 523
- 19.3 Conservation of Momentum 540
- *19.4 Eccentric Impact 544



20 Three-Dimensional Kinematics of a Rigid Body 561

Chapter Objectives 561

- 20.1 Rotation about a Fixed Point 561
- *20.2 The Time Derivative of a Vector Measured from Either a Fixed or Translating-Rotating System 564
- 20.3 General Motion 569
- *20.4 Relative-Motion Analysis Using Translating and Rotating Axes 578



21 Three-Dimensional Kinetics of a Rigid Body 591

Chapter Objectives 591

- *21.1 Moments and Products of Inertia 591
- 21.2 Angular Momentum 601
- 21.3 Kinetic Energy 604
- *21.4 Equations of Motion 612
- *21.5 Gyroscopic Motion 626
- 21.6 Torque-Free Motion 632



22

Vibrations 643

Chapter Objectives 643

- *22.1 Undamped Free Vibration 643
- *22.2 Energy Methods 657
- *22.3 Undamped Forced Vibration 663
- *22.4 Viscous Damped Free Vibration 667
- *22.5 Viscous Damped Forced Vibration 670
- *22.6 Electrical Circuit Analogs 673

Appendix

- A. Mathematical Expressions 682
- B. Vector Analysis 684
- C. The Chain Rule 689

Fundamental Problems Partial Solutions and Answers 692

Preliminary Problems Dynamics Solutions 713

Review Problem Solutions 723

Answers to Selected Problems 733

Index 747

CREDITS

Chapter opening images are credited as follows:

Chapter 12, Lars Johansson/Fotolia

Chapter 13, Migel/Shutterstock

Chapter 14, Oliver Furrer/Ocean/Corbis

Chapter 15, David J. Green/Alamy

Chapter 16, TFoxFoto/Shutterstock

Chapter 17, Surasaki/Fotolia

Chapter 18, Arinahabich/Fotolia

Chapter 19, Hellen Sergeyeva/Fotolia

Chapter 20, Philippe Psaila/Science Source

Chapter 21, Derek Watt/Alamy

Chapter 22, Daseaford/Fotolia

Sample

ENGINEERING MECHANICS

DYNAMICS

FOURTEENTH EDITION IN SI UNITS

Chapter 12



(© Lars Johansson/Fotolia)

Although each of these boats is rather large, from a distance their motion can be analyzed as if each were a particle.

Kinematics of a Particle

CHAPTER OBJECTIVES

- To introduce the concepts of position, displacement, velocity, and acceleration.
- To study particle motion along a straight line and represent this motion graphically.
- To investigate particle motion along a curved path using different coordinate systems.
- To present an analysis of dependent motion of two particles.
- To examine the principles of relative motion of two particles using translating axes.



Video Solutions are available for selected questions in this chapter.

12.1 Introduction

Mechanics is a branch of the physical sciences that is concerned with the state of rest or motion of bodies subjected to the action of forces. Engineering mechanics is divided into two areas of study, namely, statics and dynamics. **Statics** is concerned with the equilibrium of a body that is either at rest or moves with constant velocity. Here we will consider **dynamics**, which deals with the accelerated motion of a body. The subject of dynamics will be presented in two parts: *kinematics*, which treats only the geometric aspects of the motion, and *kinetics*, which is the analysis of the forces causing the motion. To develop these principles, the dynamics of a particle will be discussed first, followed by topics in rigid-body dynamics in two and then three dimensions.

Historically, the principles of dynamics developed when it was possible to make an accurate measurement of time. Galileo Galilei (1564–1642) was one of the first major contributors to this field. His work consisted of experiments using pendulums and falling bodies. The most significant contributions in dynamics, however, were made by Isaac Newton (1642–1727), who is noted for his formulation of the three fundamental laws of motion and the law of universal gravitational attraction. Shortly after these laws were postulated, important techniques for their application were developed by Euler, D'Alembert, Lagrange, and others.

There are many problems in engineering whose solutions require application of the principles of dynamics. Typically the structural design of any vehicle, such as an automobile or airplane, requires consideration of the motion to which it is subjected. This is also true for many mechanical devices, such as motors, pumps, movable tools, industrial manipulators, and machinery. Furthermore, predictions of the motions of artificial satellites, projectiles, and spacecraft are based on the theory of dynamics. With further advances in technology, there will be an even greater need for knowing how to apply the principles of this subject.

Problem Solving. Dynamics is considered to be more involved than statics since both the forces applied to a body and its motion must be taken into account. Also, many applications require using calculus, rather than just algebra and trigonometry. In any case, the most effective way of learning the principles of dynamics is *to solve problems*. To be successful at this, it is necessary to present the work in a logical and orderly manner as suggested by the following sequence of steps:

1. Read the problem carefully and try to correlate the actual physical situation with the theory you have studied.
2. Draw any necessary diagrams and tabulate the problem data.
3. Establish a coordinate system and apply the relevant principles, generally in mathematical form.
4. Solve the necessary equations algebraically as far as practical; then, use a consistent set of units and complete the solution numerically. Report the answer with no more significant figures than the accuracy of the given data.
5. Study the answer using technical judgment and common sense to determine whether or not it seems reasonable.
6. Once the solution has been completed, review the problem. Try to think of other ways of obtaining the same solution.


In applying this general procedure, do the work as neatly as possible. Being neat generally stimulates clear and orderly thinking, and vice versa.

12.2 Rectilinear Kinematics: Continuous Motion

We will begin our study of dynamics by discussing the kinematics of a particle that moves along a rectilinear or straight-line path. Recall that a *particle* has a mass but negligible size and shape. Therefore we must limit application to those objects that have dimensions that are of no consequence in the analysis of the motion. In most problems, we will be interested in bodies of finite size, such as rockets, projectiles, or vehicles. Each of these objects can be considered as a particle, as long as the motion is characterized by the motion of its mass center and any rotation of the body is neglected.

Rectilinear Kinematics. The kinematics of a particle is characterized by specifying, at any given instant, the particle's position, velocity, and acceleration.

Position. The straight-line path of a particle will be defined using a single coordinate axis s , Fig. 12-1a. The origin O on the path is a fixed point, and from this point the **position coordinate** s is used to specify the location of the particle at any given instant. The magnitude of s is the distance from O to the particle, usually measured in meters (m), and the sense of direction is defined by the algebraic sign on s . Although the choice is arbitrary, in this case s is positive since the coordinate axis is positive to the right of the origin. Likewise, it is negative if the particle is located to the left of O . Realize that *position is a vector quantity* since it has both magnitude and direction. Here, however, it is being represented by the algebraic scalar s , rather than in boldface \mathbf{s} , since the direction always remains along the coordinate axis.

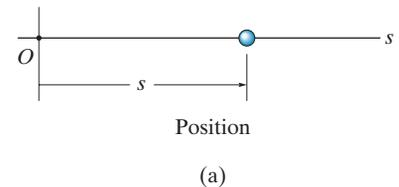

Displacement. The **displacement** of the particle is defined as the *change in its position*. For example, if the particle moves from one point to another, Fig. 12-1b, the displacement is

$$\Delta s = s' - s$$

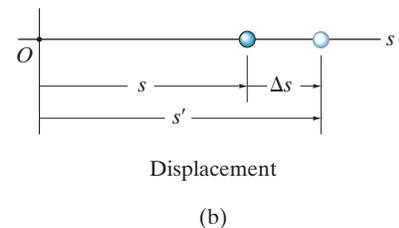


Fig. 12-1

In this case Δs is *positive* since the particle's final position is to the *right* of its initial position, i.e., $s' > s$. Likewise, if the final position were to the *left* of its initial position, Δs would be *negative*.

The displacement of a particle is also a *vector quantity*, and it should be distinguished from the distance the particle travels. Specifically, the *distance traveled* is a *positive scalar* that represents the total length of path over which the particle travels.

Velocity. If the particle moves through a displacement Δs during the time interval Δt , the **average velocity** of the particle during this time interval is


$$v_{\text{avg}} = \frac{\Delta s}{\Delta t}$$

If we take smaller and smaller values of Δt , the magnitude of Δs becomes smaller and smaller. Consequently, the **instantaneous velocity** is a vector defined as $v = \lim_{\Delta t \rightarrow 0} (\Delta s / \Delta t)$, or

(\pm)

$$v = \frac{ds}{dt}$$

(12-1)

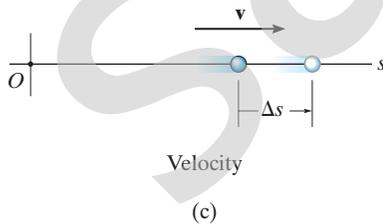

Since Δt or dt is always positive, the sign used to define the *sense* of the velocity is the same as that of Δs or ds . For example, if the particle is moving to the *right*, Fig. 12-1c, the velocity is *positive*; whereas if it is moving to the *left*, the velocity is *negative*. (This is emphasized here by the arrow written at the left of Eq. 12-1.) The *magnitude* of the velocity is known as the **speed**, and it is generally expressed in units of m/s.

Occasionally, the term “average speed” is used. The **average speed** is always a positive scalar and is defined as the total distance traveled by a particle, s_T , divided by the elapsed time Δt ; i.e.,

$$(v_{\text{sp}})_{\text{avg}} = \frac{s_T}{\Delta t}$$

For example, the particle in Fig. 12-1d travels along the path of length s_T in time Δt , so its average speed is $(v_{\text{sp}})_{\text{avg}} = s_T / \Delta t$, but its average velocity is $v_{\text{avg}} = -\Delta s / \Delta t$.

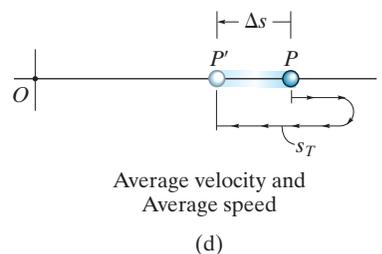


Fig. 12-1 (cont.)

Acceleration. Provided the velocity of the particle is known at two points, the **average acceleration** of the particle during the time interval Δt is defined as

$$a_{\text{avg}} = \frac{\Delta v}{\Delta t}$$

Here Δv represents the difference in the velocity during the time interval Δt , i.e., $\Delta v = v' - v$, Fig. 12-1e.

The **instantaneous acceleration** at time t is a vector that is found by taking smaller and smaller values of Δt and corresponding smaller and smaller values of Δv , so that $a = \lim_{\Delta t \rightarrow 0} (\Delta v / \Delta t)$, or

$$(\pm) \quad \boxed{a = \frac{dv}{dt}} \quad (12-2)$$

Substituting Eq. 12-1 into this result, we can also write

$$(\pm) \quad a = \frac{d^2s}{dt^2}$$

Both the average and instantaneous acceleration can be either positive or negative. In particular, when the particle is *slowing down*, or its speed is decreasing, the particle is said to be **decelerating**. In this case, v' in Fig. 12-1f is *less* than v , and so $\Delta v = v' - v$ will be negative. Consequently, a will also be negative, and therefore it will act to the *left*, in the *opposite sense* to v . Also, notice that if the particle is originally at rest, then it can have an acceleration if a moment later it has a velocity v' ; and, if the *velocity is constant*, then the *acceleration is zero* since $\Delta v = v - v = 0$. Units commonly used to express the magnitude of acceleration are m/s^2 .

Finally, an important differential relation involving the displacement, velocity, and acceleration along the path may be obtained by eliminating the time differential dt between Eqs. 12-1 and 12-2. We have

$$dt = \frac{ds}{v} = \frac{dv}{a}$$

or

$$(\pm) \quad \boxed{a ds = v dv} \quad (12-3)$$

Although we have now produced three important kinematic equations, realize that the above equation is not independent of Eqs. 12-1 and 12-2.


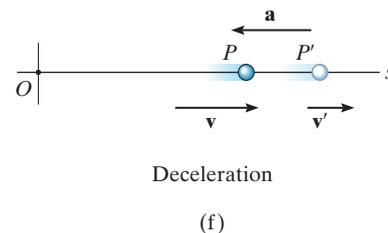


Fig. 12-1 (cont.)

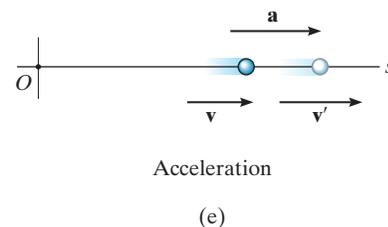

When the ball is released, it has zero velocity but an acceleration of 9.81 m/s^2 .

Constant Acceleration, $a = a_c$. When the acceleration is constant, each of the three kinematic equations $a_c = dv/dt$, $v = ds/dt$, and $a_c ds = v dv$ can be integrated to obtain formulas that relate a_c , v , s , and t .

Velocity as a Function of Time. Integrate $a_c = dv/dt$, assuming that initially $v = v_0$ when $t = 0$.

$$\int_{v_0}^v dv = \int_0^t a_c dt$$

$$v = v_0 + a_c t \quad (12-4)$$

Constant Acceleration

Position as a Function of Time. Integrate $v = ds/dt = v_0 + a_c t$, assuming that initially $s = s_0$ when $t = 0$.

$$\int_{s_0}^s ds = \int_0^t (v_0 + a_c t) dt$$

$$s = s_0 + v_0 t + \frac{1}{2} a_c t^2 \quad (12-5)$$

Constant Acceleration

Velocity as a Function of Position. Either solve for t in Eq. 12-4 and substitute into Eq. 12-5, or integrate $v dv = a_c ds$, assuming that initially $v = v_0$ at $s = s_0$.

$$\int_{v_0}^v v dv = \int_{s_0}^s a_c ds$$

$$v^2 = v_0^2 + 2a_c(s - s_0) \quad (12-6)$$

Constant Acceleration

The algebraic signs of s_0 , v_0 , and a_c , used in the above three equations, are determined from the positive direction of the s axis as indicated by the arrow written at the left of each equation. Remember that these equations are useful *only when the acceleration is constant and when $t = 0$, $s = s_0$, $v = v_0$* . A typical example of constant accelerated motion occurs when a body falls freely toward the earth. If air resistance is neglected and the distance of fall is short, then the *downward* acceleration of the body when it is close to the earth is constant and approximately 9.81 m/s^2 . The proof of this is given in Example 13.2.

Important Points

- Dynamics is concerned with bodies that have accelerated motion.
- Kinematics is a study of the geometry of the motion.
- Kinetics is a study of the forces that cause the motion.
- Rectilinear kinematics refers to straight-line motion.
- Speed refers to the magnitude of velocity.
- Average speed is the total distance traveled divided by the total time. This is different from the average velocity, which is the displacement divided by the time.
- A particle that is slowing down is decelerating.
- A particle can have an acceleration and yet have zero velocity.
- The relationship $a ds = v dv$ is derived from $a = dv/dt$ and $v = ds/dt$, by eliminating dt .



During the time this rocket undergoes rectilinear motion, its altitude as a function of time can be measured and expressed as $s = s(t)$. Its velocity can then be found using $v = ds/dt$, and its acceleration can be determined from $a = dv/dt$. (© NASA)

Procedure for Analysis

Coordinate System.

- Establish a position coordinate s along the path and specify its *fixed origin* and positive direction.
- Since motion is along a straight line, the vector quantities position, velocity, and acceleration can be represented as algebraic scalars. For analytical work the sense of s , v , and a is then defined by their *algebraic signs*.
- The positive sense for each of these scalars can be indicated by an arrow shown alongside each kinematic equation as it is applied.

Kinematic Equations.

- If a relation is known between any *two* of the four variables a , v , s , and t , then a third variable can be obtained by using one of the kinematic equations, $a = dv/dt$, $v = ds/dt$ or $a ds = v dv$, since each equation relates all three variables.*
- Whenever integration is performed, it is important that the position and velocity be known at a given instant in order to evaluate either the constant of integration if an indefinite integral is used, or the limits of integration if a definite integral is used.
- Remember that Eqs. 12–4 through 12–6 have only limited use. These equations apply *only* when the *acceleration is constant* and the initial conditions are $s = s_0$ and $v = v_0$ when $t = 0$.

*Some standard differentiation and integration formulas are given in Appendix A.

EXAMPLE 12.1



The car on the left in the photo and in Fig. 12–2 moves in a straight line such that for a short time its velocity is defined by $v = (0.6t^2 + t)$ m/s, where t is in seconds. Determine its position and acceleration when $t = 3$ s. When $t = 0$, $s = 0$.



Fig. 12–2

SOLUTION

Coordinate System. The position coordinate extends from the fixed origin O to the car, positive to the right.

Position. Since $v = f(t)$, the car's position can be determined from $v = ds/dt$, since this equation relates v , s , and t . Noting that $s = 0$ when $t = 0$, we have*

$$\begin{aligned}
 (\pm) \quad v &= \frac{ds}{dt} = (0.6t^2 + t) \\
 \int_0^s ds &= \int_0^t (0.6t^2 + t) dt \\
 s \Big|_0^s &= 0.2t^3 + 0.5t^2 \Big|_0^t \\
 s &= (0.2t^3 + 0.5t^2) \text{ m}
 \end{aligned}$$

When $t = 3$ s,

$$s = 0.2(3)^3 + 0.5(3)^2 = 9.90 \text{ m} \quad \text{Ans.}$$

Acceleration. Since $v = f(t)$, the acceleration is determined from $a = dv/dt$, since this equation relates a , v , and t .

$$\begin{aligned}
 (\pm) \quad a &= \frac{dv}{dt} = \frac{d}{dt}(0.6t^2 + t) \\
 &= (1.2t + 1) \text{ m/s}^2
 \end{aligned}$$

When $t = 3$ s,

$$a = 1.2(3) + 1 = 4.60 \text{ m/s}^2 \rightarrow \quad \text{Ans.}$$

NOTE: The formulas for constant acceleration *cannot* be used to solve this problem, because the acceleration is a function of time.

*The *same result* can be obtained by evaluating a constant of integration C rather than using definite limits on the integral. For example, integrating $ds = (0.6t^2 + t)dt$ yields $s = 0.2t^3 + 0.5t^2 + C$. Using the condition that at $t = 0$, $s = 0$, then $C = 0$.

EXAMPLE 12.2

A small projectile is fired vertically *downward* into a fluid medium with an initial velocity of 60 m/s. Due to the drag resistance of the fluid the projectile experiences a deceleration of $a = (-0.4v^3)$ m/s², where v is in m/s. Determine the projectile's velocity and position 4 s after it is fired.

SOLUTION

Coordinate System. Since the motion is downward, the position coordinate is positive downward, with origin located at O , Fig. 12-3.

Velocity. Here $a = f(v)$ and so we must determine the velocity as a function of time using $a = dv/dt$, since this equation relates v , a , and t . (Why not use $v = v_0 + a_c t$?) Separating the variables and integrating, with $v_0 = 60$ m/s when $t = 0$, yields

$$\begin{aligned}
 (+\downarrow) \quad a &= \frac{dv}{dt} = -0.4v^3 \\
 \int_{60 \text{ m/s}}^v \frac{dv}{-0.4v^3} &= \int_0^t dt \\
 \frac{1}{-0.4} \left(\frac{1}{-2} \right) \frac{1}{v^2} \Big|_{60}^v &= t - 0 \\
 \frac{1}{0.8} \left[\frac{1}{v^2} - \frac{1}{(60)^2} \right] &= t \\
 v &= \left\{ \left[\frac{1}{(60)^2} + 0.8t \right]^{-1/2} \right\} \text{ m/s}
 \end{aligned}$$

Here the positive root is taken, since the projectile will continue to move downward. When $t = 4$ s,

$$v = 0.559 \text{ m/s} \downarrow \quad \text{Ans.}$$

Position. Knowing $v = f(t)$, we can obtain the projectile's position from $v = ds/dt$, since this equation relates s , v , and t . Using the initial condition $s = 0$, when $t = 0$, we have

$$\begin{aligned}
 (+\downarrow) \quad v &= \frac{ds}{dt} = \left[\frac{1}{(60)^2} + 0.8t \right]^{-1/2} \\
 \int_0^s ds &= \int_0^t \left[\frac{1}{(60)^2} + 0.8t \right]^{-1/2} dt \\
 s &= \frac{2}{0.8} \left[\frac{1}{(60)^2} + 0.8t \right]^{1/2} \Big|_0^t \\
 s &= \frac{1}{0.4} \left\{ \left[\frac{1}{(60)^2} + 0.8t \right]^{1/2} - \frac{1}{60} \right\} \text{ m}
 \end{aligned}$$

When $t = 4$ s,

$$s = 4.43 \text{ m} \quad \text{Ans.}$$

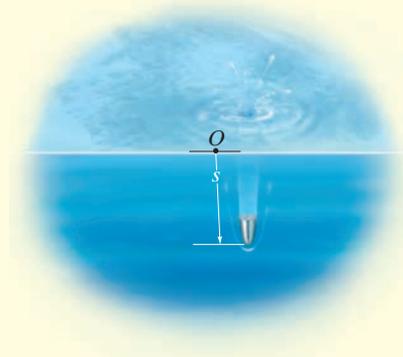


Fig. 12-3

EXAMPLE 12.3

During a test a rocket travels upward at 75 m/s, and when it is 40 m from the ground its engine fails. Determine the maximum height s_B reached by the rocket and its speed just before it hits the ground. While in motion the rocket is subjected to a constant downward acceleration of 9.81 m/s^2 due to gravity. Neglect the effect of air resistance.

SOLUTION

Coordinate System. The origin O for the position coordinate s is taken at ground level with positive upward, Fig. 12-4.

Maximum Height. Since the rocket is traveling *upward*, $v_A = +75 \text{ m/s}$ when $t = 0$. At the maximum height $s = s_B$ the velocity $v_B = 0$. For the entire motion, the acceleration is $a_c = -9.81 \text{ m/s}^2$ (negative since it acts in the *opposite* sense to positive velocity or positive displacement). Since a_c is *constant* the rocket's position may be related to its velocity at the two points A and B on the path by using Eq. 12-6, namely,

$$\begin{aligned} (+\uparrow) \quad v_B^2 &= v_A^2 + 2a_c(s_B - s_A) \\ 0 &= (75 \text{ m/s})^2 + 2(-9.81 \text{ m/s}^2)(s_B - 40 \text{ m}) \\ s_B &= 327 \text{ m} \end{aligned} \quad \text{Ans.}$$

Velocity. To obtain the velocity of the rocket just before it hits the ground, we can apply Eq. 12-6 between points B and C , Fig. 12-4.

$$\begin{aligned} (+\uparrow) \quad v_C^2 &= v_B^2 + 2a_c(s_C - s_B) \\ &= 0 + 2(-9.81 \text{ m/s}^2)(0 - 327 \text{ m}) \\ v_C &= -80.1 \text{ m/s} = 80.1 \text{ m/s} \downarrow \end{aligned} \quad \text{Ans.}$$

The negative root was chosen since the rocket is moving downward.

Similarly, Eq. 12-6 may also be applied between points A and C , i.e.,

$$\begin{aligned} (+\uparrow) \quad v_C^2 &= v_A^2 + 2a_c(s_C - s_A) \\ &= (75 \text{ m/s})^2 + 2(-9.81 \text{ m/s}^2)(0 - 40 \text{ m}) \\ v_C &= -80.1 \text{ m/s} = 80.1 \text{ m/s} \downarrow \end{aligned} \quad \text{Ans.}$$

NOTE: It should be realized that the rocket is subjected to a *deceleration* from A to B of 9.81 m/s^2 , and then from B to C it is *accelerated* at this rate. Furthermore, even though the rocket momentarily comes to *rest* at B ($v_B = 0$) the acceleration at B is still 9.81 m/s^2 downward!

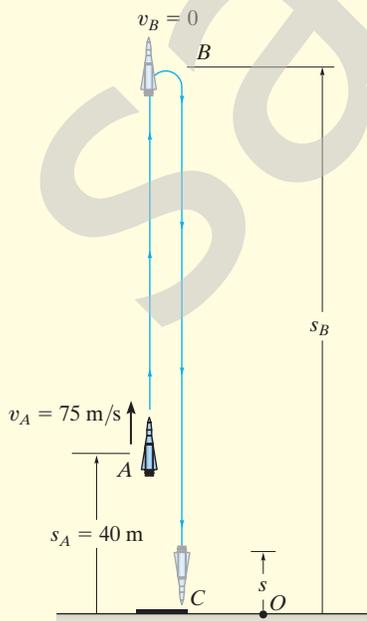


Fig. 12-4

EXAMPLE 12.4

A metallic particle is subjected to the influence of a magnetic field as it travels downward through a fluid that extends from plate A to plate B , Fig. 12–5. If the particle is released from rest at the midpoint C , $s = 100$ mm, and the acceleration is $a = (4s) \text{ m/s}^2$, where s is in meters, determine the velocity of the particle when it reaches plate B , $s = 200$ mm, and the time it takes to travel from C to B .

SOLUTION

Coordinate System. As shown in Fig. 12–5, s is positive downward, measured from plate A .

Velocity. Since $a = f(s)$, the velocity as a function of position can be obtained by using $v dv = a ds$. Realizing that $v = 0$ at $s = 0.1$ m, we have

$$\begin{aligned}
 (+\downarrow) \quad v dv &= a ds \\
 \int_0^v v dv &= \int_{0.1 \text{ m}}^s 4s ds \\
 \frac{1}{2}v^2 \Big|_0^v &= \frac{4}{2}s^2 \Big|_{0.1 \text{ m}}^s \\
 v &= 2(s^2 - 0.01)^{1/2} \text{ m/s} \quad (1)
 \end{aligned}$$

At $s = 200 \text{ mm} = 0.2 \text{ m}$,

$$v_B = 0.346 \text{ m/s} = 346 \text{ mm/s} \downarrow \quad \text{Ans.}$$

The positive root is chosen since the particle is traveling downward, i.e., in the $+s$ direction.

Time. The time for the particle to travel from C to B can be obtained using $v = ds/dt$ and Eq. 1, where $s = 0.1 \text{ m}$ when $t = 0$. From Appendix A,

$$\begin{aligned}
 (+\downarrow) \quad ds &= v dt \\
 &= 2(s^2 - 0.01)^{1/2} dt \\
 \int_{0.1}^s \frac{ds}{(s^2 - 0.01)^{1/2}} &= \int_0^t 2 dt \\
 \ln(\sqrt{s^2 - 0.01} + s) \Big|_{0.1}^s &= 2t \Big|_0^t \\
 \ln(\sqrt{s^2 - 0.01} + s) + 2.303 &= 2t
 \end{aligned}$$

At $s = 0.2 \text{ m}$,

$$t = \frac{\ln(\sqrt{(0.2)^2 - 0.01} + 0.2) + 2.303}{2} = 0.658 \text{ s} \quad \text{Ans.}$$

NOTE: The formulas for constant acceleration cannot be used here because the acceleration changes with position, i.e., $a = 4s$.

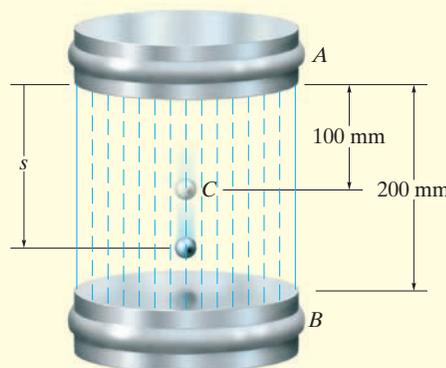


Fig. 12–5


EXAMPLE 12.5

A particle moves along a horizontal path with a velocity of $v = (3t^2 - 6t)$ m/s, where t is the time in seconds. If it is initially located at the origin O , determine the distance traveled in 3.5 s, and the particle's average velocity and average speed during the time interval.

SOLUTION

Coordinate System. Here positive motion is to the right, measured from the origin O , Fig. 12-6a.

Distance Traveled. Since $v = f(t)$, the position as a function of time may be found by integrating $v = ds/dt$ with $t = 0, s = 0$.

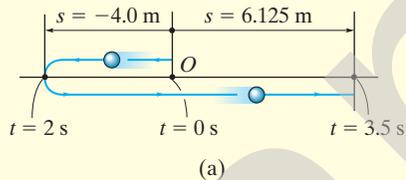

(\pm)

$$\begin{aligned} ds &= v dt \\ &= (3t^2 - 6t) dt \\ \int_0^s ds &= \int_0^t (3t^2 - 6t) dt \\ s &= (t^3 - 3t^2) \text{ m} \end{aligned} \quad (1)$$

In order to determine the distance traveled in 3.5 s, it is necessary to investigate the path of motion. If we consider a graph of the velocity function, Fig. 12-6b, then it reveals that for $0 < t < 2$ s the velocity is *negative*, which means the particle is traveling to the *left*, and for $t > 2$ s the velocity is *positive*, and hence the particle is traveling to the *right*. Also, note that $v = 0$ at $t = 2$ s. The particle's position when $t = 0, t = 2$ s, and $t = 3.5$ s can be determined from Eq. 1. This yields

$$s|_{t=0} = 0 \quad s|_{t=2\text{ s}} = -4.0 \text{ m} \quad s|_{t=3.5\text{ s}} = 6.125 \text{ m}$$

The path is shown in Fig. 12-6a. Hence, the distance traveled in 3.5 s is

$$s_T = 4.0 + 4.0 + 6.125 = 14.125 \text{ m} = 14.1 \text{ m} \quad \text{Ans.}$$

Velocity. The *displacement* from $t = 0$ to $t = 3.5$ s is

$$\Delta s = s|_{t=3.5\text{ s}} - s|_{t=0} = 6.125 \text{ m} - 0 = 6.125 \text{ m}$$

and so the average velocity is

$$v_{\text{avg}} = \frac{\Delta s}{\Delta t} = \frac{6.125 \text{ m}}{3.5 \text{ s} - 0} = 1.75 \text{ m/s} \rightarrow \quad \text{Ans.}$$

The average speed is defined in terms of the *distance traveled* s_T . This positive scalar is

$$(v_{\text{sp}})_{\text{avg}} = \frac{s_T}{\Delta t} = \frac{14.125 \text{ m}}{3.5 \text{ s} - 0} = 4.04 \text{ m/s} \quad \text{Ans.}$$

NOTE: In this problem, the acceleration is $a = dv/dt = (6t - 6)$ m/s², which is not constant.

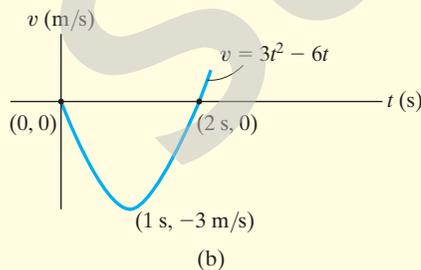



Fig. 12-6

It is highly suggested that you test yourself on the solutions to these examples, by covering them over and then trying to think about which equations of kinematics must be used and how they are applied in order to determine the unknowns. Then before solving any of the problems, try and solve some of the Preliminary and Fundamental Problems which follow. The solutions and answers to all these problems are given in the back of the book. **Doing this throughout the book will help immensely in understanding how to apply the theory, and thereby develop your problem-solving skills.**

PRELIMINARY PROBLEM

P12-1.

- a) If $s = (2t^3)$ m, where t is in seconds, determine v when $t = 2$ s.
- b) If $v = (5s)$ m/s, where s is in meters, determine a at $s = 1$ m.
- c) If $v = (4t + 5)$ m/s, where t is in seconds, determine a when $t = 2$ s.
- d) If $a = 2$ m/s², determine v when $t = 2$ s if $v = 0$ when $t = 0$.
- e) If $a = 2$ m/s², determine v at $s = 4$ m if $v = 3$ m/s at $s = 0$.
- f) If $a = (s)$ m/s², where s is in meters, determine v when $s = 5$ m if $v = 0$ at $s = 4$ m.
- g) If $a = 4$ m/s², determine s when $t = 3$ s if $v = 2$ m/s and $s = 2$ m when $t = 0$.
- h) If $a = (8t^2)$ m/s², determine v when $t = 1$ s if $v = 0$ at $t = 0$.
- i) If $s = (3t^2 + 2)$ m, determine v when $t = 2$ s.
- j) When $t = 0$ the particle is at A . In four seconds it travels to B , then in another six seconds it travels to C . Determine the average velocity and the average speed. The origin of the coordinate is at O .

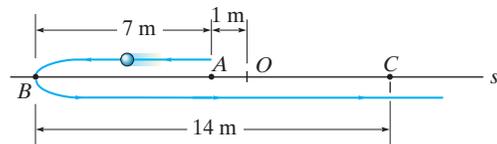

Prob. P12-1

12 FUNDAMENTAL PROBLEMS

F12-1. Initially, the car travels along a straight road with a speed of 35 m/s. If the brakes are applied and the speed of the car is reduced to 10 m/s in 15 s, determine the constant deceleration of the car.



Prob. F12-1

F12-2. A ball is thrown vertically upward with a speed of 15 m/s. Determine the time of flight when it returns to its original position.



Prob. F12-2

F12-3. A particle travels along a straight line with a velocity of $v = (4t - 3t^2)$ m/s, where t is in seconds. Determine the position of the particle when $t = 4$ s. $s = 0$ when $t = 0$.

F12-4. A particle travels along a straight line with a speed $v = (0.5t^3 - 8t)$ m/s, where t is in seconds. Determine the acceleration of the particle when $t = 2$ s.

F12-5. The position of the particle is given by $s = (2t^2 - 8t + 6)$ m, where t is in seconds. Determine the time when the velocity of the particle is zero, and the total distance traveled by the particle when $t = 3$ s.



Prob. F12-5

F12-6. A particle travels along a straight line with an acceleration of $a = (10 - 0.2s)$ m/s², where s is measured in meters. Determine the velocity of the particle when $s = 10$ m if $v = 5$ m/s at $s = 0$.



Prob. F12-6

F12-7. A particle moves along a straight line such that its acceleration is $a = (4t^2 - 2)$ m/s², where t is in seconds. When $t = 0$, the particle is located 2 m to the left of the origin, and when $t = 2$ s, it is 20 m to the left of the origin. Determine the position of the particle when $t = 4$ s.

F12-8. A particle travels along a straight line with a velocity of $v = (20 - 0.05s^2)$ m/s, where s is in meters. Determine the acceleration of the particle at $s = 15$ m.

PROBLEMS

12-1. Starting from rest, a particle moving in a straight line has an acceleration of $a = (2t - 6) \text{ m/s}^2$, where t is in seconds. What is the particle's velocity when $t = 6 \text{ s}$, and what is its position when $t = 11 \text{ s}$?

12-2. The acceleration of a particle as it moves along a straight line is given by $a = (4t^3 - 1) \text{ m/s}^2$, where t is in seconds. If $s = 2 \text{ m}$ and $v = 5 \text{ m/s}$ when $t = 0$, determine the particle's velocity and position when $t = 5 \text{ s}$. Also, determine the total distance the particle travels during this time period.

12-3. The velocity of a particle traveling in a straight line is given by $v = (6t - 3t^2) \text{ m/s}$, where t is in seconds. If $s = 0$ when $t = 0$, determine the particle's deceleration and position when $t = 3 \text{ s}$. How far has the particle traveled during the 3-s time interval, and what is its average speed?

***12-4.** A particle is moving along a straight line such that its position is defined by $s = (10t^2 + 20) \text{ mm}$, where t is in seconds. Determine (a) the displacement of the particle during the time interval from $t = 1 \text{ s}$ to $t = 5 \text{ s}$, (b) the average velocity of the particle during this time interval, and (c) the acceleration when $t = 1 \text{ s}$.


12-5. A particle moves along a straight line such that its position is defined by $s = (t^2 - 6t + 5) \text{ m}$. Determine the average velocity, the average speed, and the acceleration of the particle when $t = 6 \text{ s}$.

12-6. A stone A is dropped from rest down a well, and in 1 s another stone B is dropped from rest. Determine the distance between the stones another second later.

12-7. A bus starts from rest with a constant acceleration of 1 m/s^2 . Determine the time required for it to attain a speed of 25 m/s and the distance traveled.

***12-8.** A particle travels along a straight line with a velocity $v = (12 - 3t^2) \text{ m/s}$, where t is in seconds. When $t = 1 \text{ s}$, the particle is located 10 m to the left of the origin. Determine the acceleration when $t = 4 \text{ s}$, the displacement from $t = 0$ to $t = 10 \text{ s}$, and the distance the particle travels during this time period.

12-9. When two cars A and B are next to one another, they are traveling in the same direction with speeds v_A and v_B , respectively. If B maintains its constant speed, while A begins to decelerate at a_A , determine the distance d between the cars at the instant A stops.

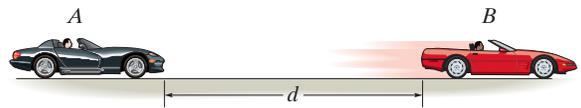

Prob. 12-9

12-10. A particle travels along a straight-line path such that in 4 s it moves from an initial position $s_A = -8 \text{ m}$ to a position $s_B = +3 \text{ m}$. Then in another 5 s it moves from s_B to $s_C = -6 \text{ m}$. Determine the particle's average velocity and average speed during the 9-s time interval.

12-11. Traveling with an initial speed of 70 km/h , a car accelerates at 6000 km/h^2 along a straight road. How long will it take to reach a speed of 120 km/h ? Also, through what distance does the car travel during this time?

***12-12.** A particle moves along a straight line with an acceleration of $a = 5/(3s^{1/3} + s^{5/2}) \text{ m/s}^2$, where s is in meters. Determine the particle's velocity when $s = 2 \text{ m}$, if it starts from rest when $s = 1 \text{ m}$. Use a numerical method to evaluate the integral.

12-13. The acceleration of a particle as it moves along a straight line is given by $a = (2t - 1) \text{ m/s}^2$, where t is in seconds. If $s = 1 \text{ m}$ and $v = 2 \text{ m/s}$ when $t = 0$, determine the particle's velocity and position when $t = 6 \text{ s}$. Also, determine the total distance the particle travels during this time period.

12-14. A train starts from rest at station A and accelerates at 0.5 m/s^2 for 60 s. Afterwards it travels with a constant velocity for 15 min. It then decelerates at 1 m/s^2 until it is brought to rest at station B . Determine the distance between the stations.


12-15. A particle is moving along a straight line such that its velocity is defined as $v = (-4s^2) \text{ m/s}$, where s is in meters. If $s = 2 \text{ m}$ when $t = 0$, determine the velocity and acceleration as functions of time.

***12-16.** Determine the time required for a car to travel 1 km along a road if the car starts from rest, reaches a maximum speed at some intermediate point, and then stops at the end of the road. The car can accelerate at 1.5 m/s^2 and decelerate at 2 m/s^2 .

12-17. A particle is moving with a velocity of v_0 when $s = 0$ and $t = 0$. If it is subjected to a deceleration of $a = -kv^3$, where k is a constant, determine its velocity and position as functions of time.


12-18. A particle is moving along a straight line with an initial velocity of 6 m/s when it is subjected to a deceleration of $a = (-1.5v^{1/2}) \text{ m/s}^2$, where v is in m/s . Determine how far it travels before it stops. How much time does this take?

12-19. The acceleration of a rocket traveling upward is given by $a = (6 + 0.02s) \text{ m/s}^2$, where s is in meters. Determine the rocket's velocity when $s = 2 \text{ km}$ and the time needed to reach this altitude. Initially, $v = 0$ and $s = 0$ when $t = 0$.

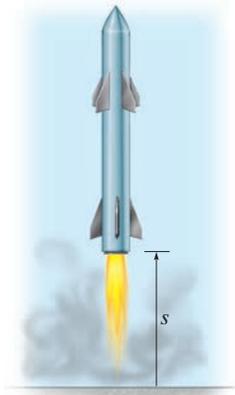

Prob. 12-19

***12-20.** The acceleration of a rocket traveling upward is given by $a = (6 + 0.02s) \text{ m/s}^2$, where s is in meters. Determine the time needed for the rocket to reach an altitude of $s = 100 \text{ m}$. Initially, $v = 0$ and $s = 0$ when $t = 0$.

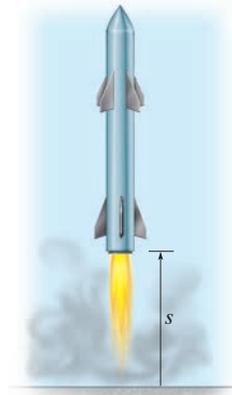

Prob. 12-20

12-21. When a train is traveling along a straight track at 2 m/s , it begins to accelerate at $a = (60v^{-4}) \text{ m/s}^2$, where v is in m/s . Determine its velocity v and the position 3 s after the acceleration.



Prob. 12-21

12-22. The acceleration of a particle along a straight line is defined by $a = (2t - 9) \text{ m/s}^2$, where t is in seconds. At $t = 0$, $s = 1 \text{ m}$ and $v = 10 \text{ m/s}$. When $t = 9 \text{ s}$, determine (a) the particle's position, (b) the total distance traveled, and (c) the velocity.

12-23. If the effects of atmospheric resistance are accounted for, a freely falling body has an acceleration defined by the equation $a = 9.81[1 - v^2(10^{-4})] \text{ m/s}^2$, where v is in m/s and the positive direction is downward. If the body is released from rest at a very high altitude, determine (a) the velocity when $t = 5 \text{ s}$, and (b) the body's terminal or maximum attainable velocity (as $t \rightarrow \infty$).

***12-24.** A sandbag is dropped from a balloon which is ascending vertically at a constant speed of 6 m/s . If the bag is released with the same upward velocity of 6 m/s when $t = 0$ and hits the ground when $t = 8 \text{ s}$, determine the speed of the bag as it hits the ground and the altitude of the balloon at this instant.

12-25. A particle is moving along a straight line such that its acceleration is defined as $a = (-2v) \text{ m/s}^2$, where v is in meters per second. If $v = 20 \text{ m/s}$ when $s = 0$ and $t = 0$, determine the particle's position, velocity, and acceleration as functions of time.

12-26. The acceleration of a particle traveling along a straight line is $a = \frac{1}{4} s^{1/2} \text{ m/s}^2$, where s is in meters. If $v = 0$, $s = 1 \text{ m}$ when $t = 0$, determine the particle's velocity at $s = 2 \text{ m}$.

12-27. When a particle falls through the air, its initial acceleration $a = g$ diminishes until it is zero, and thereafter it falls at a constant or terminal velocity v_f . If this variation of the acceleration can be expressed as $a = (g/v_f^2)(v_f^2 - v^2)$, determine the time needed for the velocity to become $v = v_f/2$. Initially the particle falls from rest.

***12-28.** A sphere is fired downwards into a medium with an initial speed of 27 m/s . If it experiences a deceleration of $a = (-6t) \text{ m/s}^2$, where t is in seconds, determine the distance traveled before it stops.

12-29. A ball A is thrown vertically upward from the top of a 30-m -high building with an initial velocity of 5 m/s . At the same instant another ball B is thrown upward from the ground with an initial velocity of 20 m/s . Determine the height from the ground and the time at which they pass.

12-30. A boy throws a ball straight up from the top of a 12-m high tower. If the ball falls past him 0.75 s later, determine the velocity at which it was thrown, the velocity of the ball when it strikes the ground, and the time of flight.

12-31. The velocity of a particle traveling along a straight line is $v = v_0 - ks$, where k is constant. If $s = 0$ when $t = 0$, determine the position and acceleration of the particle as a function of time.

***12-32.** Ball A is thrown vertically upwards with a velocity of v_0 . Ball B is thrown upwards from the same point with the same velocity t seconds later. Determine the elapsed time $t < 2v_0/g$ from the instant ball A is thrown to when the balls pass each other, and find the velocity of each ball at this instant.

12-33. As a body is projected to a high altitude above the earth's surface, the variation of the acceleration of gravity with respect to altitude y must be taken into account. Neglecting air resistance, this acceleration is determined from the formula $a = -g_0[R^2/(R + y)^2]$, where g_0 is the constant gravitational acceleration at sea level, R is the radius of the earth, and the positive direction is measured upward. If $g_0 = 9.81 \text{ m/s}^2$ and $R = 6356 \text{ km}$, determine the minimum initial velocity (escape velocity) at which a projectile should be shot vertically from the earth's surface so that it does not fall back to the earth. *Hint:* This requires that $v = 0$ as $y \rightarrow \infty$.

12-34. Accounting for the variation of gravitational acceleration a with respect to altitude y (see Prob. 12-40), derive an equation that relates the velocity of a freely falling particle to its altitude. Assume that the particle is released from rest at an altitude y_0 from the earth's surface. With what velocity does the particle strike the earth if it is released from rest at an altitude $y_0 = 500 \text{ km}$? Use the numerical data in Prob. 12-33.

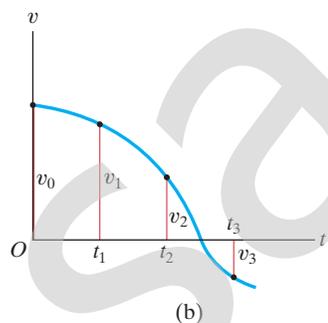
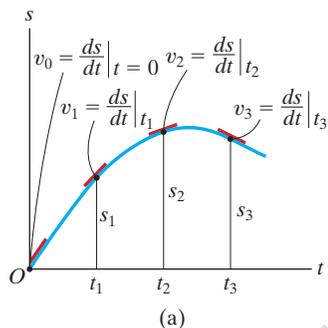


Fig. 12-7

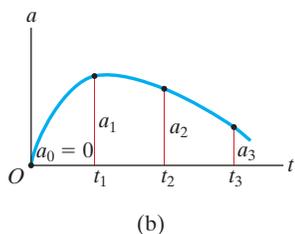
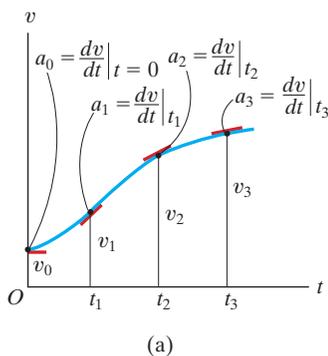


Fig. 12-8

12.3 Rectilinear Kinematics: Erratic Motion

When a particle has erratic or changing motion then its position, velocity, and acceleration *cannot* be described by a single continuous mathematical function along the entire path. Instead, a series of functions will be required to specify the motion at different intervals. For this reason, it is convenient to represent the motion as a graph. If a graph of the motion that relates any two of the variables s, v, a, t can be drawn, then this graph can be used to construct subsequent graphs relating two other variables since the variables are related by the differential relationships $v = ds/dt$, $a = dv/dt$, or $a ds = v dv$. Several situations occur frequently.

The s - t , v - t , and a - t Graphs. To construct the v - t graph given the s - t graph, Fig. 12-7a, the equation $v = ds/dt$ should be used, since it relates the variables s and t to v . This equation states that

$$\frac{ds}{dt} = v$$

slope of s - t graph = velocity

For example, by measuring the slope on the s - t graph when $t = t_1$, the velocity is v_1 , which is plotted in Fig. 12-7b. The v - t graph can be constructed by plotting this and other values at each instant.

The a - t graph can be constructed from the v - t graph in a similar manner, Fig. 12-8, since

$$\frac{dv}{dt} = a$$

slope of v - t graph = acceleration

Examples of various measurements are shown in Fig. 12-8a and plotted in Fig. 12-8b.

If the s - t curve for each interval of motion can be expressed by a mathematical function $s = s(t)$, then the equation of the v - t graph for the same interval can be obtained by differentiating this function with respect to time since $v = ds/dt$. Likewise, the equation of the a - t graph for the same interval can be determined by differentiating $v = v(t)$ since $a = dv/dt$. Since differentiation reduces a polynomial of degree n to that of degree $n - 1$, then if the s - t graph is parabolic (a second-degree curve), the v - t graph will be a sloping line (a first-degree curve), and the a - t graph will be a constant or a horizontal line (a zero-degree curve).

If the a - t graph is given, Fig. 12-9a, the v - t graph may be constructed using $a = dv/dt$, written as

$$\Delta v = \int a \, dt$$

change in velocity = area under a - t graph

Hence, to construct the v - t graph, we begin with the particle's initial velocity v_0 and then add to this small increments of area (Δv) determined from the a - t graph. In this manner successive points, $v_1 = v_0 + \Delta v$, etc., for the v - t graph are determined, Fig. 12-9b. Notice that an algebraic addition of the area increments of the a - t graph is necessary, since areas lying above the t axis correspond to an increase in v ("positive" area), whereas those lying below the axis indicate a decrease in v ("negative" area).

Similarly, if the v - t graph is given, Fig. 12-10a, it is possible to determine the s - t graph using $v = ds/dt$, written as

$$\Delta s = \int v \, dt$$

displacement = area under v - t graph

In the same manner as stated above, we begin with the particle's initial position s_0 and add (algebraically) to this small area increments Δs determined from the v - t graph, Fig. 12-10b.

If segments of the a - t graph can be described by a series of equations, then each of these equations can be *integrated* to yield equations describing the corresponding segments of the v - t graph. In a similar manner, the s - t graph can be obtained by integrating the equations which describe the segments of the v - t graph. As a result, if the a - t graph is linear (a first-degree curve), integration will yield a v - t graph that is parabolic (a second-degree curve) and an s - t graph that is cubic (third-degree curve).

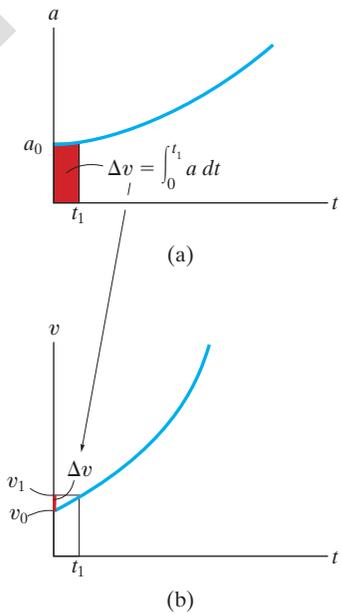


Fig. 12-9


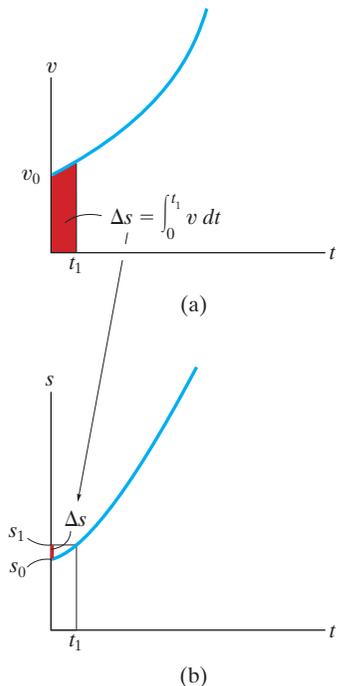


Fig. 12-10

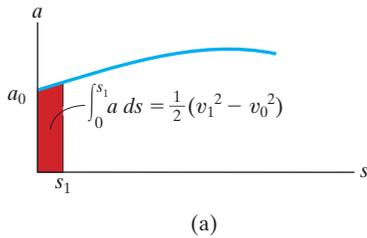

The v - s and a - s Graphs. If the a - s graph can be constructed, then points on the v - s graph can be determined by using $v dv = a ds$. Integrating this equation between the limits $v = v_0$ at $s = s_0$ and $v = v_1$ at $s = s_1$, we have,

$$\frac{1}{2}(v_1^2 - v_0^2) = \int_{s_0}^{s_1} a ds$$

area under
 a - s graph


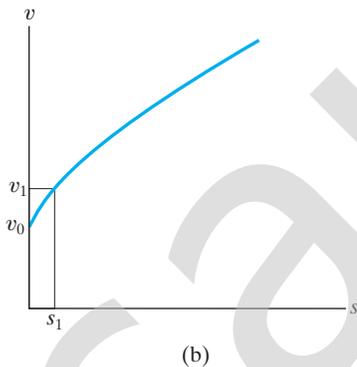


Fig. 12-11

Therefore, if the red area in Fig. 12-11a is determined, and the initial velocity v_0 at $s_0 = 0$ is known, then $v_1 = (2 \int_0^{s_1} a ds + v_0^2)^{1/2}$, Fig. 12-11b. Successive points on the v - s graph can be constructed in this manner.

If the v - s graph is known, the acceleration a at any position s can be determined using $a ds = v dv$, written as

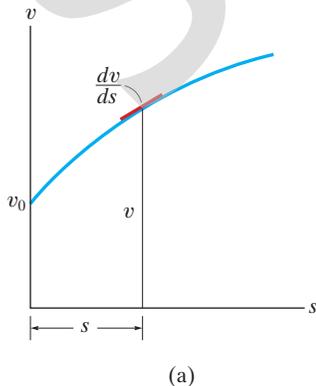

$$a = v \left(\frac{dv}{ds} \right)$$

velocity times
acceleration = slope of
 v - s graph

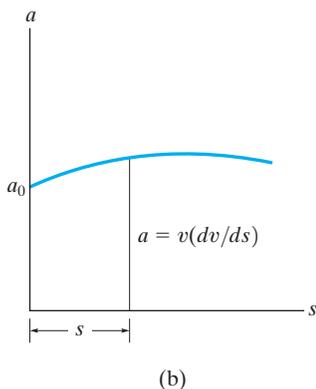



Fig. 12-12

Thus, at any point (s, v) in Fig. 12-12a, the slope dv/ds of the v - s graph is measured. Then with v and dv/ds known, the value of a can be calculated, Fig. 12-12b.

The v - s graph can also be constructed from the a - s graph, or vice versa, by approximating the known graph in various intervals with mathematical functions, $v = f(s)$ or $a = g(s)$, and then using $a ds = v dv$ to obtain the other graph.

EXAMPLE 12.6

A bicycle moves along a straight road such that its position is described by the graph shown in Fig. 12–13a. Construct the $v-t$ and $a-t$ graphs for $0 \leq t \leq 30$ s.

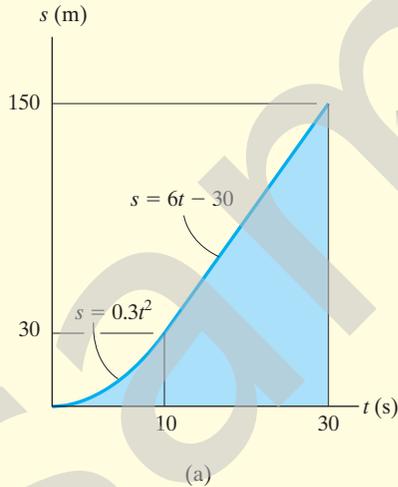**SOLUTION**

$v-t$ Graph. Since $v = ds/dt$, the $v-t$ graph can be determined by differentiating the equations defining the $s-t$ graph, Fig. 12–13a. We have

$$0 \leq t < 10 \text{ s}; \quad s = (0.3t^2) \text{ m} \quad v = \frac{ds}{dt} = (0.6t) \text{ m/s}$$

$$10 \text{ s} < t \leq 30 \text{ s}; \quad s = (6t - 30) \text{ m} \quad v = \frac{ds}{dt} = 6 \text{ m/s}$$

The results are plotted in Fig. 12–13b. We can also obtain specific values of v by measuring the *slope* of the $s-t$ graph at a given instant. For example, at $t = 20$ s, the slope of the $s-t$ graph is determined from the straight line from 10 s to 30 s, i.e.,

$$t = 20 \text{ s}; \quad v = \frac{\Delta s}{\Delta t} = \frac{150 \text{ m} - 30 \text{ m}}{30 \text{ s} - 10 \text{ s}} = 6 \text{ m/s}$$

$a-t$ Graph. Since $a = dv/dt$, the $a-t$ graph can be determined by differentiating the equations defining the lines of the $v-t$ graph. This yields

$$0 \leq t < 10 \text{ s}; \quad v = (0.6t) \text{ m/s} \quad a = \frac{dv}{dt} = 0.6 \text{ m/s}^2$$

$$10 < t \leq 30 \text{ s}; \quad v = 6 \text{ m/s} \quad a = \frac{dv}{dt} = 0$$

The results are plotted in Fig. 12–13c.

NOTE: Show that $a = 0.6 \text{ m/s}^2$ when $t = 5$ s by measuring the slope of the $v-t$ graph.




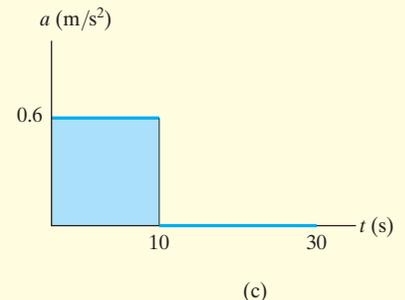


Fig. 12–13


EXAMPLE 12.7

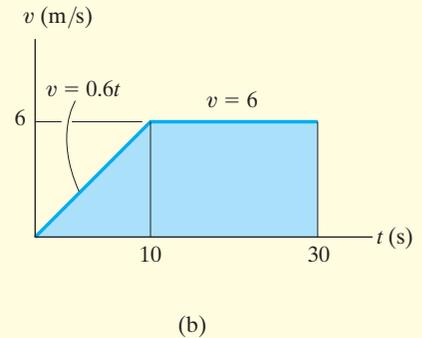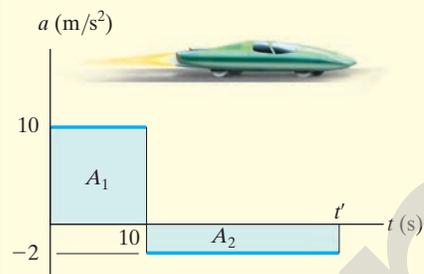

(a)

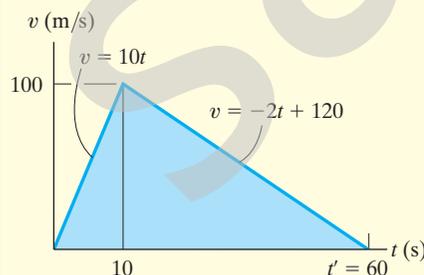

(b)

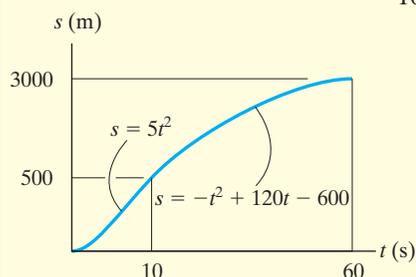

(c)

The car in Fig. 12–14a starts from rest and travels along a straight track such that it accelerates at 10 m/s^2 for 10 s, and then decelerates at 2 m/s^2 . Draw the v - t and s - t graphs and determine the time t' needed to stop the car. How far has the car traveled?

SOLUTION

v - t Graph. Since $dv = a dt$, the v - t graph is determined by integrating the straight-line segments of the a - t graph. Using the *initial condition* $v = 0$ when $t = 0$, we have

$$0 \leq t < 10 \text{ s}; \quad a = (10) \text{ m/s}^2; \quad \int_0^v dv = \int_0^t 10 dt, \quad v = 10t$$

When $t = 10 \text{ s}$, $v = 10(10) = 100 \text{ m/s}$. Using this as the *initial condition* for the next time period, we have

$$10 \text{ s} < t \leq t'; \quad a = (-2) \text{ m/s}^2; \quad \int_{100 \text{ m/s}}^v dv = \int_{10 \text{ s}}^t -2 dt, \quad v = (-2t + 120) \text{ m/s}$$

When $t = t'$ we require $v = 0$. This yields, Fig. 12–14b,

$$t' = 60 \text{ s} \quad \text{Ans.}$$

A more direct solution for t' is possible by realizing that the area under the a - t graph is equal to the change in the car's velocity. We require $\Delta v = 0 = A_1 + A_2$, Fig. 12–14a. Thus

$$0 = 10 \text{ m/s}^2(10 \text{ s}) + (-2 \text{ m/s}^2)(t' - 10 \text{ s})$$

$$t' = 60 \text{ s} \quad \text{Ans.}$$

s - t Graph. Since $ds = v dt$, integrating the equations of the v - t graph yields the corresponding equations of the s - t graph. Using the *initial condition* $s = 0$ when $t = 0$, we have

$$0 \leq t \leq 10 \text{ s}; \quad v = (10t) \text{ m/s}; \quad \int_0^s ds = \int_0^t 10t dt, \quad s = (5t^2) \text{ m}$$

When $t = 10 \text{ s}$, $s = 5(10)^2 = 500 \text{ m}$. Using this *initial condition*,

$$10 \text{ s} \leq t \leq 60 \text{ s}; \quad v = (-2t + 120) \text{ m/s}; \quad \int_{500 \text{ m}}^s ds = \int_{10 \text{ s}}^t (-2t + 120) dt$$

$$s - 500 = -t^2 + 120t - [-(10)^2 + 120(10)]$$

$$s = (-t^2 + 120t - 600) \text{ m}$$

When $t' = 60 \text{ s}$, the position is

$$s = -(60)^2 + 120(60) - 600 = 3000 \text{ m} \quad \text{Ans.}$$

The s - t graph is shown in Fig. 12–14c.

NOTE: A direct solution for s is possible when $t' = 60 \text{ s}$, since the *triangular area* under the v - t graph would yield the displacement $\Delta s = s - 0$ from $t = 0$ to $t' = 60 \text{ s}$. Hence,

$$\Delta s = \frac{1}{2}(60 \text{ s})(100 \text{ m/s}) = 3000 \text{ m} \quad \text{Ans.}$$

Fig. 12–14

EXAMPLE 12.8

The v - s graph describing the motion of a motorcycle is shown in Fig. 12-15a. Construct the a - s graph of the motion and determine the time needed for the motorcycle to reach the position $s = 160$ m.

SOLUTION

a - s Graph. Since the equations for segments of the v - s graph are given, the a - s graph can be determined using $a \, ds = v \, dv$.

$$0 \leq s < 80 \text{ m}; \quad v = (0.2s + 4) \text{ m/s}$$

$$a = v \frac{dv}{ds} = (0.2s + 4) \frac{d}{ds}(0.2s + 4) = 0.04s + 0.8$$

$$80 \text{ m} < s \leq 160 \text{ m}; \quad v = 20 \text{ m/s}$$

$$a = v \frac{dv}{ds} = (20) \frac{d}{ds}(20) = 0$$

The results are plotted in Fig. 12-15b.

Time. The time can be obtained using the v - s graph and $v = ds/dt$, because this equation relates v , s , and t . For the first segment of motion, $s = 0$ when $t = 0$, so

$$0 \leq s < 80 \text{ m}; \quad v = (0.2s + 4) \text{ m/s}; \quad dt = \frac{ds}{v} = \frac{ds}{0.2s + 4}$$

$$\int_0^t dt = \int_0^s \frac{ds}{0.2s + 4}$$

$$t = \left[5 \ln \left(\frac{0.2s + 4}{4} \right) \right] \text{ s}$$

At $s = 80$ m, $t = 5 \ln \left[\frac{0.2(80) + 4}{4} \right] = 8.047$ s. Therefore, using these initial conditions for the second segment of motion,

$$80 \text{ m} < s \leq 160 \text{ m}; \quad v = 20 \text{ m/s}; \quad dt = \frac{ds}{v} = \frac{ds}{20}$$

$$\int_{8.047 \text{ s}}^t dt = \int_{80 \text{ m}}^s \frac{ds}{20};$$

$$t - 8.047 = \frac{s}{20} - 4; \quad t = \left(\frac{s}{20} + 4.047 \right) \text{ s}$$

Therefore, at $s = 160$ m,

$$t = \frac{160}{20} + 4.047 = 12.0 \text{ s} \quad \text{Ans.}$$

NOTE: The graphical results can be checked in part by calculating slopes. For example, at $s = 0$, $a = v(dv/ds) = 4(20 - 4)/80 = 0.8 \text{ m/s}^2$. Also, the results can be checked in part by inspection. The v - s graph indicates the initial increase in velocity (acceleration) followed by constant velocity ($a = 0$).



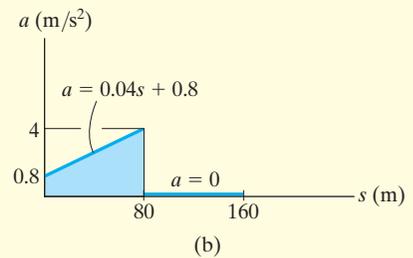


Fig. 12-15


PRELIMINARY PROBLEM

P12-2.


a) Draw the $s-t$ and $a-t$ graphs if $s = 0$ when $t = 0$.

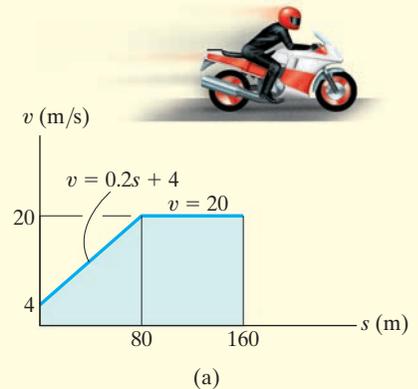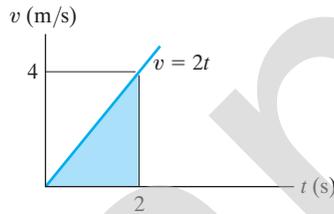


b) Draw the $a-t$ and $v-t$ graphs.

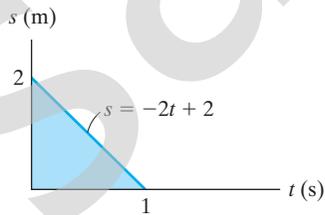


c) Draw the $v-t$ and $s-t$ graphs if $v = 0$, $s = 0$ when $t = 0$.

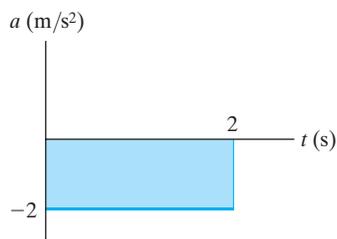


d) Determine s and a when $t = 3$ s if $s = 0$ when $t = 0$.

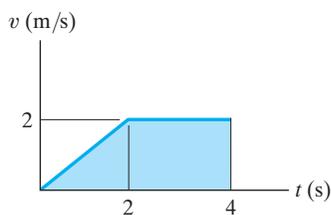


e) Draw the $v-t$ graph if $v = 0$ when $t = 0$. Find the equation $v = f(t)$ for each segment.

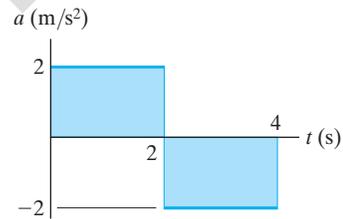

f) Determine v at $s = 2$ m if $v = 1$ m/s at $s = 0$.

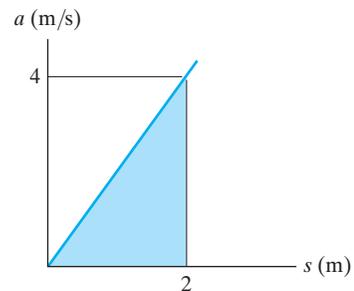


g) Determine a at $s = 1$ m.

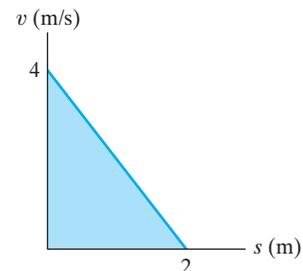

FUNDAMENTAL PROBLEMS


12

F12-9. The particle travels along a straight track such that its position is described by the $s-t$ graph. Construct the $v-t$ graph for the same time interval.

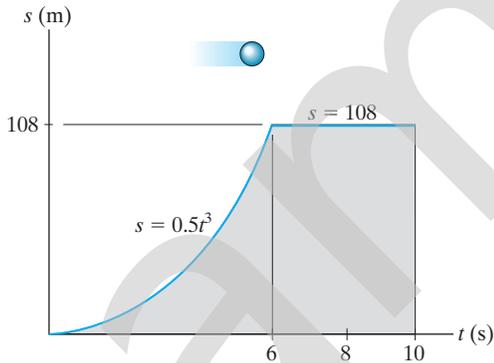


Prob. F12-9

F12-10. The sports car travels along a straight road such that its position is described by the graph. Construct the $v-t$ and $a-t$ graphs for the time interval $0 \leq t \leq 10$ s.

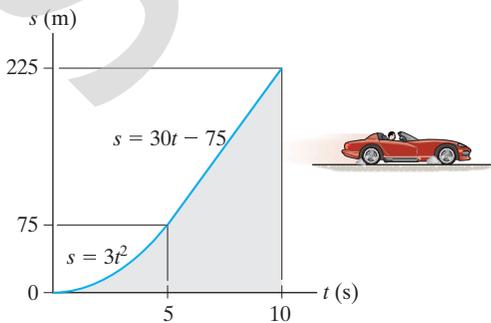


Prob. F12-10

F12-11. A bicycle travels along a straight road where its velocity is described by the $v-s$ graph. Construct the $a-s$ graph for the same interval.

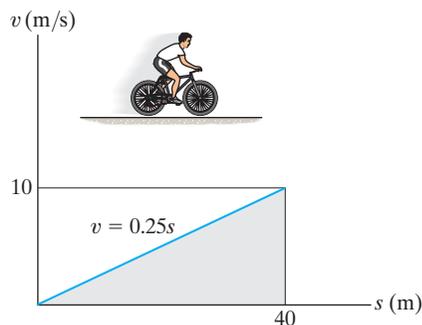


Prob. F12-11

F12-12. The sports car travels along a straight road such that its acceleration is described by the graph. Construct the $v-s$ graph for the same interval and specify the velocity of the car when $s = 10$ m and $s = 15$ m.

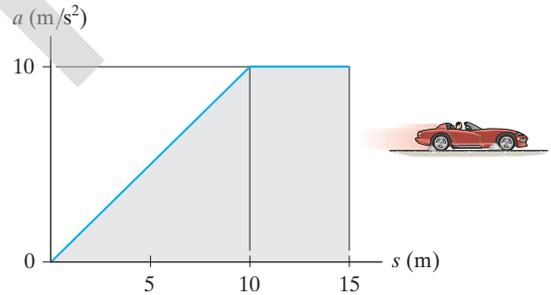


Prob. F12-12

F12-13. The dragster starts from rest and has an acceleration described by the graph. Construct the $v-t$ graph for the time interval $0 \leq t \leq t'$, where t' is the time for the car to come to rest.

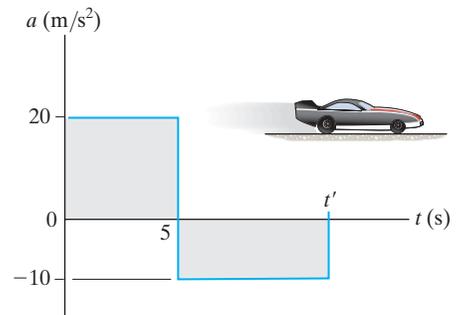

Prob. F12-13

F12-14. The dragster starts from rest and has a velocity described by the graph. Construct the $s-t$ graph during the time interval $0 \leq t \leq 15$ s. Also, determine the total distance traveled during this time interval.

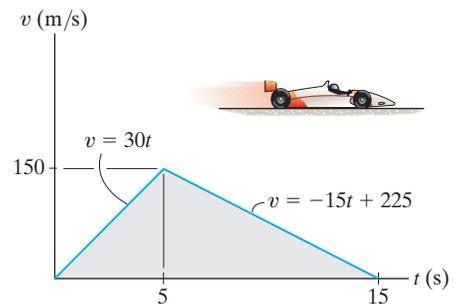

Prob. F12-14

PROBLEMS

12-35. A train starts from station *A* and for the first kilometer, it travels with a uniform acceleration. Then, for the next two kilometers, it travels with a uniform speed. Finally, the train decelerates uniformly for another kilometer before coming to rest at station *B*. If the time for the whole journey is six minutes, draw the $v-t$ graph and determine the maximum speed of the train.


***12-36.** If the position of a particle is defined by $s = [2 \sin(\pi/5)t + 4]$ m, where t is in seconds, construct the $s-t$, $v-t$, and $a-t$ graphs for $0 \leq t \leq 10$ s.

12-37. A particle starts from $s = 0$ and travels along a straight line with a velocity $v = (t^2 - 4t + 3)$ m/s, where t is in seconds. Construct the $v-t$ and $a-t$ graphs for the time interval $0 \leq t \leq 4$ s.

12-38. Two rockets start from rest at the same elevation. Rocket *A* accelerates vertically at 20 m/s^2 for 12 s and then maintains a constant speed. Rocket *B* accelerates at 15 m/s^2 until reaching a constant speed of 150 m/s . Construct the $a-t$, $v-t$, and $s-t$ graphs for each rocket until $t = 20$ s. What is the distance between the rockets when $t = 20$ s?


12-39. If the position of a particle is defined by $s = [3 \sin(\pi/4)t + 8]$ m, where t is in seconds, construct the $s-t$, $v-t$, and $a-t$ graphs for $0 \leq t \leq 10$ s.

***12-40.** The $s-t$ graph for a train has been experimentally determined. From the data, construct the $v-t$ and $a-t$ graphs for the motion; $0 \leq t \leq 40$ s. For $0 \leq t \leq 30$ s, the curve is $s = (0.4t^2)$ m, and then it becomes straight for $t \geq 30$ s.

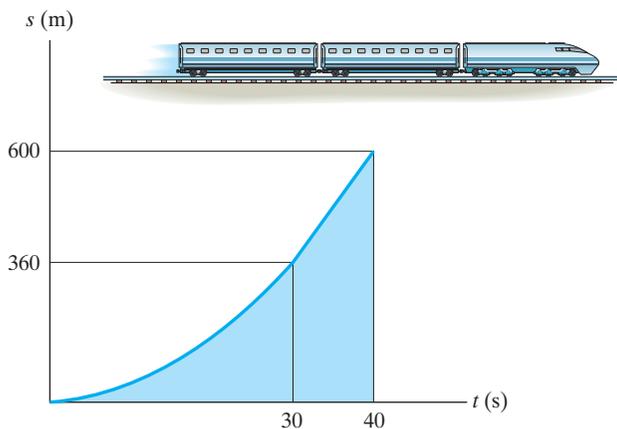


Prob. 12-40

12-41. The velocity of a car is plotted as shown. Determine the total distance the car moves until it stops ($t = 80$ s). Construct the $a-t$ graph.

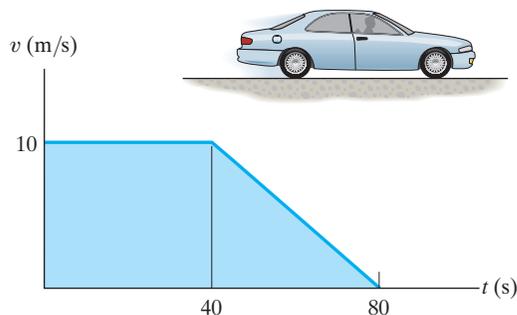

Prob. 12-41


12-42. The snowmobile moves along a straight course according to the $v-t$ graph. Construct the $s-t$ and $a-t$ graphs for the same 50-s time interval. When $t = 2$, $s = 0$.

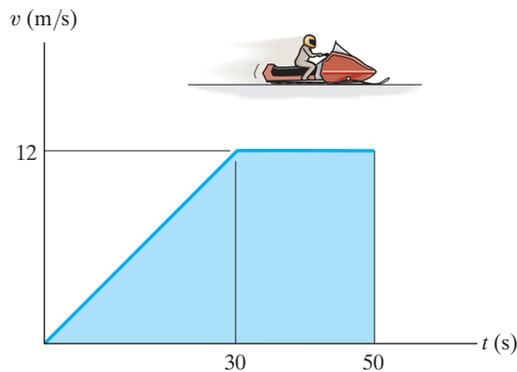

Prob. 12-42


12-43. The $v-t$ graph for a particle moving through an electric field from one plate to another has the shape shown in the figure. The acceleration and deceleration that occur are constant and both have a magnitude of 4 m/s^2 . If the plates are spaced 200 mm apart, determine the maximum velocity v_{max} and the time t' for the particle to travel from one plate to the other. Also draw the $s-t$ graph. When $t = t'/2$ the particle is at $s = 100 \text{ mm}$.

***12-44.** The $v-t$ graph for a particle moving through an electric field from one plate to another has the shape shown in the figure, where $t' = 0.2 \text{ s}$ and $v_{\text{max}} = 10 \text{ m/s}$. Draw the $s-t$ and $a-t$ graphs for the particle. When $t = t'/2$ the particle is at $s = 0.5 \text{ m}$.

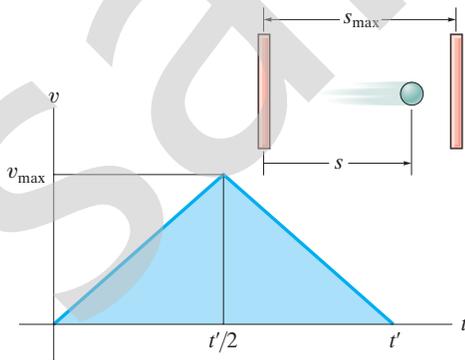


Probs. 12-43/44

12-45. The motion of a jet plane just after landing on a runway is described by the $a-t$ graph. Determine the time t' when the jet plane stops. Construct the $v-t$ and $s-t$ graphs for the motion. Here $s = 0$, and $v = 150 \text{ m/s}$ when $t = 0$.

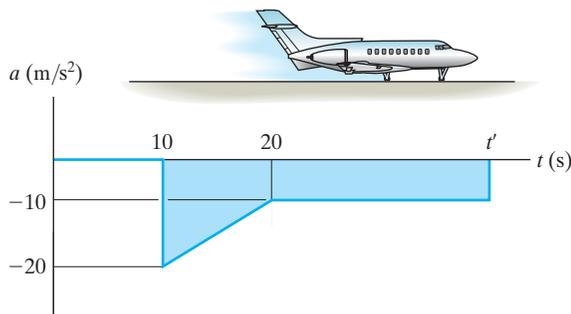


Prob. 12-45

12-46. A two-stage rocket is fired vertically from rest at $s = 0$ with the acceleration as shown. After 30 s the first stage, A , burns out and the second stage, B , ignites. Plot the $v-t$ and $s-t$ graphs which describe the motion of the second stage for $0 \leq t \leq 60 \text{ s}$.

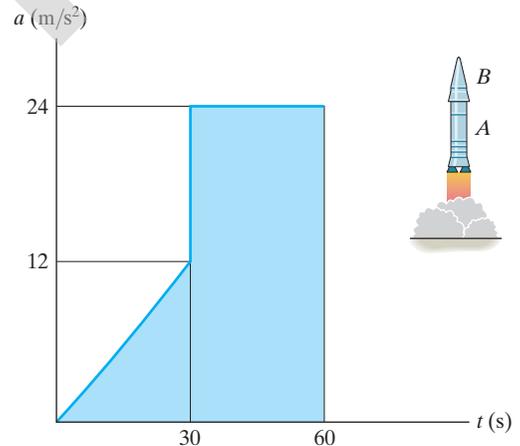

Prob. 12-46


12-47. The $a-t$ graph of the bullet train is shown. If the train starts from rest, determine the elapsed time t' before it again comes to rest. What is the total distance traveled during this time interval? Construct the $v-t$ and $s-t$ graphs.

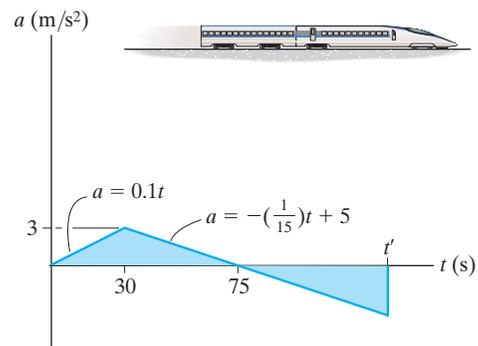

Prob. 12-47


12

***12-48.** The $v-t$ graph for a train has been experimentally determined. From the data, construct the $s-t$ and $a-t$ graphs for the motion for $0 \leq t \leq 180$ s. When $t = 0$, $s = 0$.

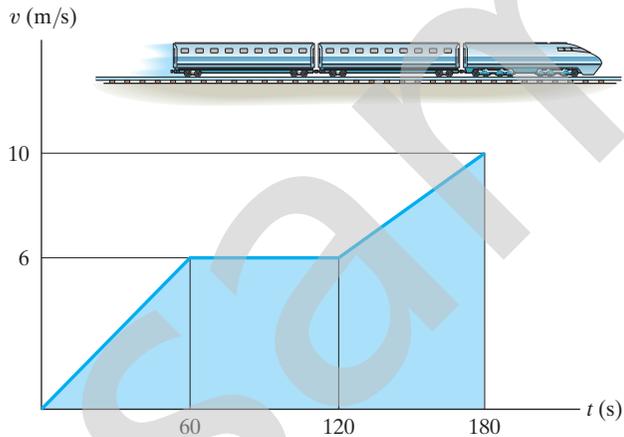


Prob. 12-48

12-49. The $v-s$ graph for a go-cart traveling on a straight road is shown. Determine the acceleration of the go-cart at $s = 50$ m and $s = 150$ m. Draw the $a-s$ graph.

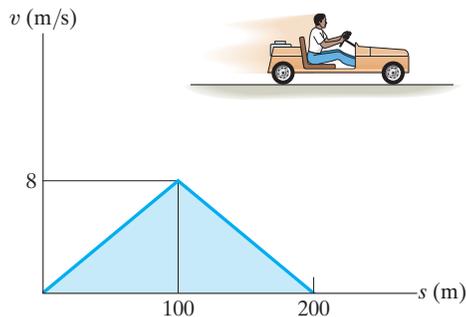


Prob. 12-49

12-50. The jet car is originally traveling at a velocity of 10 m/s when it is subjected to the acceleration shown. Determine the car's maximum velocity and the time t' when it stops. When $t = 0$, $s = 0$.

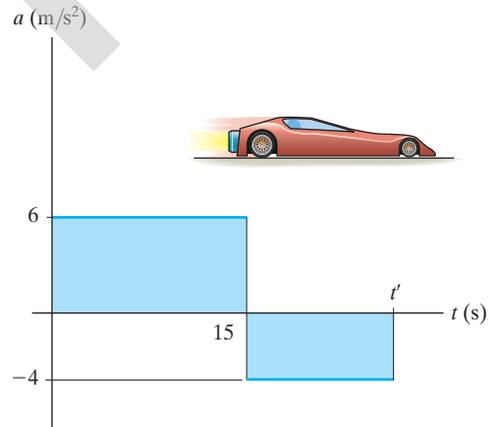


Prob. 12-50

12-51. The race car starts from rest and travels along a straight road until it reaches a speed of 26 m/s in 8 s as shown on the $v-t$ graph. The flat part of the graph is caused by shifting gears. Draw the $a-t$ graph and determine the maximum acceleration of the car.

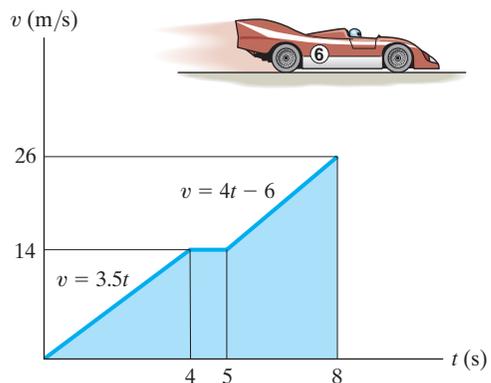


Prob. 12-51

***12-52.** A car starts from rest and travels along a straight road with a velocity described by the graph. Determine the total distance traveled until the car stops. Construct the $s-t$ and $a-t$ graphs.

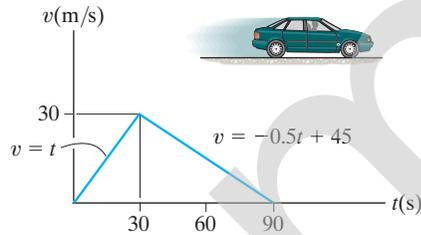


Prob. 12-52

12-53. The $v-s$ graph for an airplane traveling on a straight runway is shown. Determine the acceleration of the plane at $s = 100$ m and $s = 150$ m. Draw the $a-s$ graph.

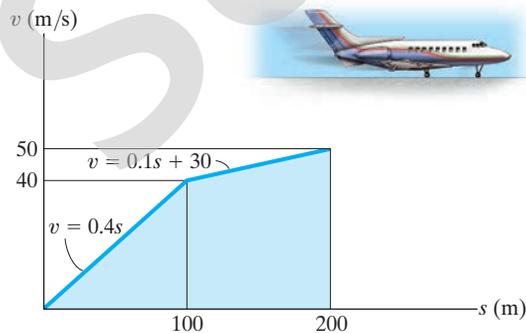


Prob. 12-53

12-54. The $a-s$ graph for a jeep traveling along a straight road is given for the first 300 m of its motion. Construct the $v-s$ graph. At $s = 0$, $v = 0$.

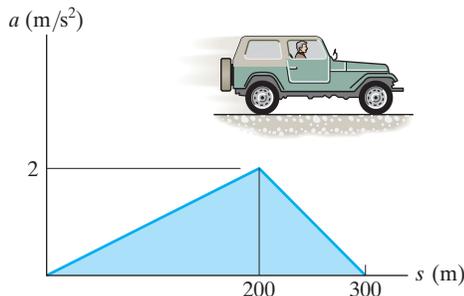

Prob. 12-54


12-55. The $v-t$ graph for the motion of a car as it moves along a straight road is shown. Draw the $s-t$ and $a-t$ graphs. Also determine the average speed and the distance traveled for the 15-s time interval. When $t = 0$, $s = 0$.

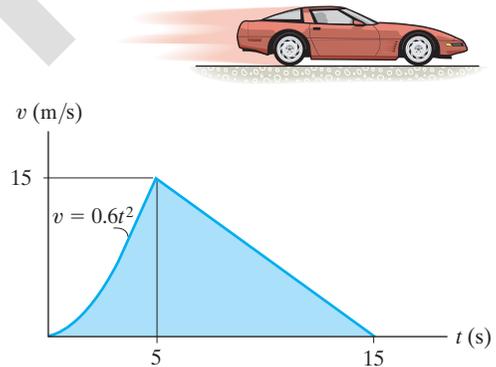

Prob. 12-55

***12-56.** A motorcycle starts from rest at $s = 0$ and travels along a straight road with the speed shown by the $v-t$ graph. Determine the total distance the motorcycle travels until it stops when $t = 15$ s. Also plot the $a-t$ and $s-t$ graphs.

12-57. A motorcycle starts from rest at $s = 0$ and travels along a straight road with the speed shown by the $v-t$ graph. Determine the motorcycle's acceleration and position when $t = 8$ s and $t = 12$ s.

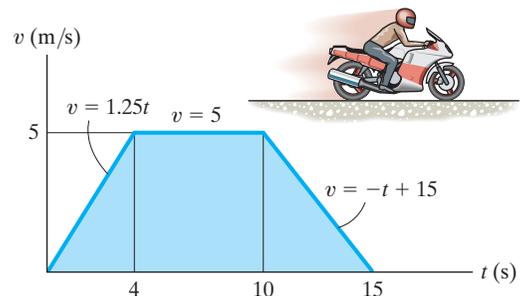

Probs. 12-56/57

12-58. Two cars start from rest side by side and travel along a straight road. Car *A* accelerates at 4 m/s^2 for 10 s and then maintains a constant speed. Car *B* accelerates at 5 m/s^2 until reaching a constant speed of 25 m/s and then maintains this speed. Construct the $a-t$, $v-t$, and $s-t$ graphs for each car until $t = 15 \text{ s}$. What is the distance between the two cars when $t = 15 \text{ s}$?


12-59. A particle travels along a curve defined by the equation $s = (t^3 - 3t^2 + 2t) \text{ m}$, where t is in seconds. Draw the $s-t$, $v-t$, and $a-t$ graphs for the particle for $0 \leq t \leq 3 \text{ s}$.

***12-60.** The speed of a train during the first minute has been recorded as follows:

$t \text{ (s)}$	0	20	40	60
$v \text{ (m/s)}$	0	16	21	24


Plot the $v-t$ graph, approximating the curve as straight-line segments between the given points. Determine the total distance traveled.

12-61. A two-stage rocket is fired vertically from rest with the acceleration shown. After 15 s the first stage *A* burns out and the second stage *B* ignites. Plot the $v-t$ and $s-t$ graphs which describe the motion of the second stage for $0 \leq t \leq 40 \text{ s}$.

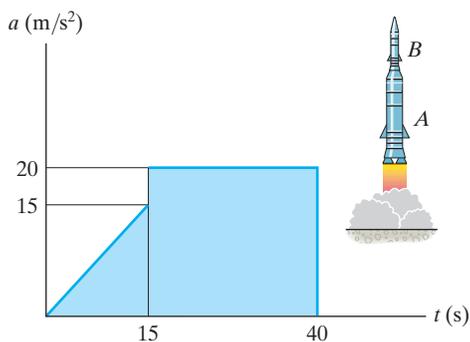

Prob. 12-61


12-62. The motion of a train is described by the $a-s$ graph shown. Draw the $v-s$ graph if $v = 0$ at $s = 0$.

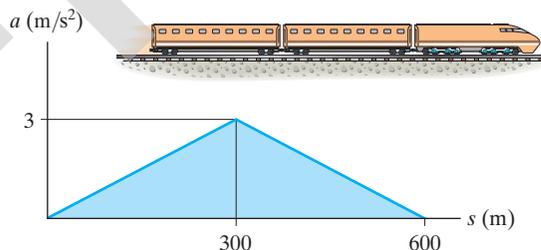

Prob. 12-62


12-63. If the position of a particle is defined as $s = (5t - 3t^2) \text{ m}$, where t is in seconds, construct the $s-t$, $v-t$, and $a-t$ graphs for $0 \leq t \leq 2.5 \text{ s}$.

***12-64.** From experimental data, the motion of a jet plane while traveling along a runway is defined by the $v-t$ graph. Construct the $s-t$ and $a-t$ graphs for the motion. When $t = 0, s = 0$.

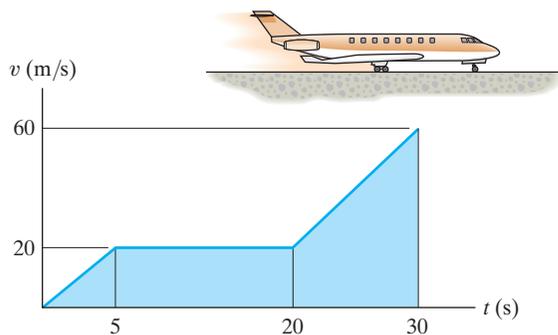


Prob. 12-64

12-65. The v - s graph for a test vehicle is shown. Determine its acceleration when $s = 100$ m and when $s = 175$ m.

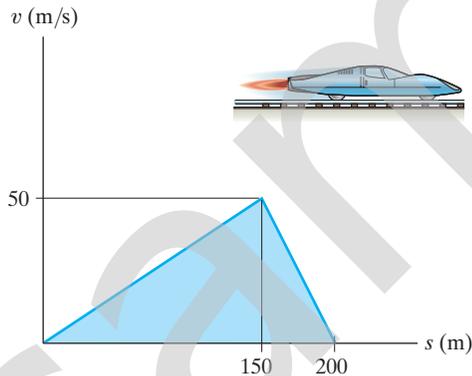


Prob. 12-65

12-67. The boat travels along a straight line with the speed described by the graph. Construct the s - t and a - s graphs. Also, determine the time required for the boat to travel a distance $s = 400$ m if $s = 0$ when $t = 0$.

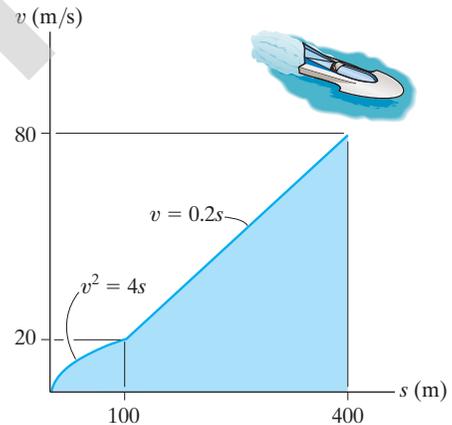


Prob. 12-67

12-66. The a - t graph for a car is shown. Construct the v - t and s - t graphs if the car starts from rest at $t = 0$. At what time t' does the car stop?

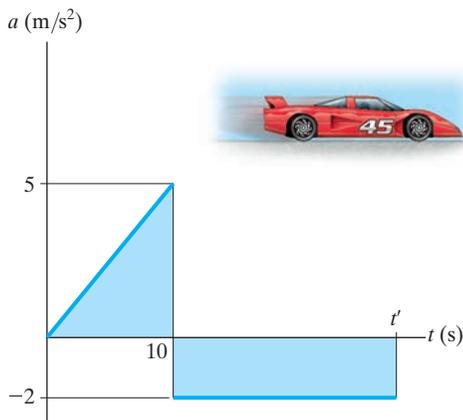

Prob. 12-66

***12-68.** The a - s graph for a train traveling along a straight track is given for the first 400 m of its motion. Plot the v - s graph. $v = 0$ at $s = 0$.

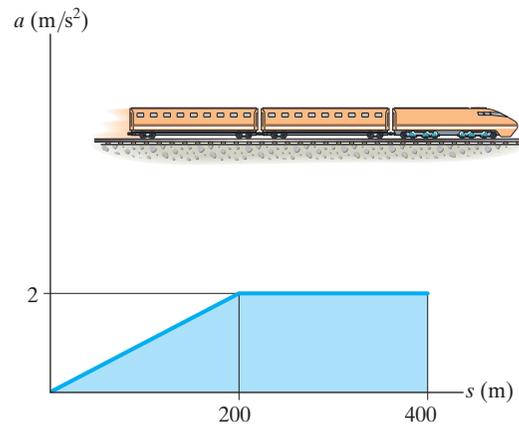

Prob. 12-68

12.4 General Curvilinear Motion

Curvilinear motion occurs when a particle moves along a curved path. Since this path is often described in three dimensions, vector analysis will be used to formulate the particle's position, velocity, and acceleration.* In this section the general aspects of curvilinear motion are discussed, and in subsequent sections we will consider three types of coordinate systems often used to analyze this motion.

Position. Consider a particle located at a point on a space curve defined by the path function $s(t)$, Fig. 12-16a. The position of the particle, measured from a fixed point O , will be designated by the *position vector* $\mathbf{r} = \mathbf{r}(t)$. Notice that both the magnitude and direction of this vector will change as the particle moves along the curve.

Displacement. Suppose that during a small time interval Δt the particle moves a distance Δs along the curve to a new position, defined by $\mathbf{r}' = \mathbf{r} + \Delta \mathbf{r}$, Fig. 12-16b. The *displacement* $\Delta \mathbf{r}$ represents the change in the particle's position and is determined by vector subtraction; i.e., $\Delta \mathbf{r} = \mathbf{r}' - \mathbf{r}$.

Velocity. During the time Δt , the *average velocity* of the particle is

$$\mathbf{v}_{\text{avg}} = \frac{\Delta \mathbf{r}}{\Delta t}$$

The *instantaneous velocity* is determined from this equation by letting $\Delta t \rightarrow 0$, and consequently the direction of $\Delta \mathbf{r}$ approaches the *tangent* to the curve. Hence, $\mathbf{v} = \lim_{\Delta t \rightarrow 0} (\Delta \mathbf{r} / \Delta t)$ or

$$\mathbf{v} = \frac{d\mathbf{r}}{dt} \quad (12-7)$$

Since $d\mathbf{r}$ will be tangent to the curve, the *direction* of \mathbf{v} is also *tangent to the curve*, Fig. 12-16c. The *magnitude* of \mathbf{v} , which is called the *speed*, is obtained by realizing that the length of the straight line segment $\Delta \mathbf{r}$ in Fig. 12-16b approaches the arc length Δs as $\Delta t \rightarrow 0$, we have $v = \lim_{\Delta t \rightarrow 0} (\Delta r / \Delta t) = \lim_{\Delta t \rightarrow 0} (\Delta s / \Delta t)$, or

$$v = \frac{ds}{dt} \quad (12-8)$$

Thus, the *speed* can be obtained by differentiating the path function s with respect to time.

*A summary of some of the important concepts of vector analysis is given in Appendix B.

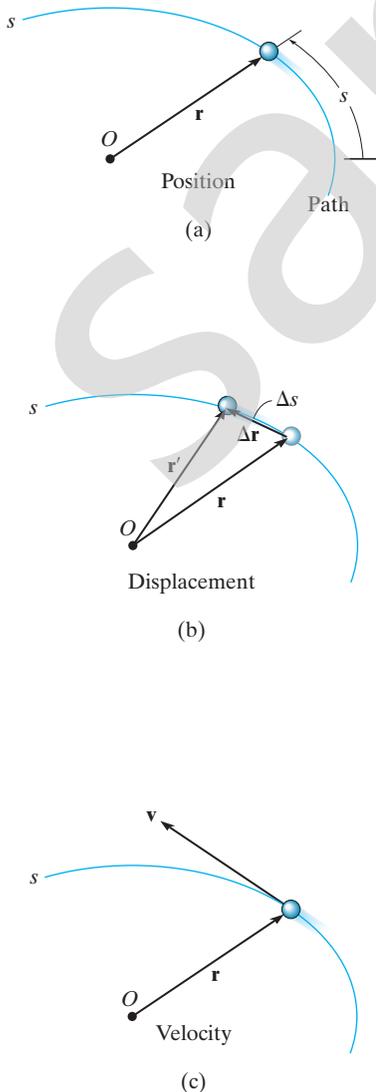


Fig. 12-16

Acceleration. If the particle has a velocity \mathbf{v} at time t and a velocity $\mathbf{v}' = \mathbf{v} + \Delta\mathbf{v}$ at $t + \Delta t$, Fig. 12-16*d*, then the *average acceleration* of the particle during the time interval Δt is

$$\mathbf{a}_{\text{avg}} = \frac{\Delta\mathbf{v}}{\Delta t}$$

where $\Delta\mathbf{v} = \mathbf{v}' - \mathbf{v}$. To study this time rate of change, the two velocity vectors in Fig. 12-16*d* are plotted in Fig. 12-16*e* such that their tails are located at the fixed point O' and their arrowheads touch points on a curve. This curve is called a *hodograph*, and when constructed, it describes the locus of points for the arrowhead of the velocity vector in the same manner as the *path* s describes the locus of points for the arrowhead of the position vector, Fig. 12-16*a*.


To obtain the *instantaneous acceleration*, let $\Delta t \rightarrow 0$ in the above equation. In the limit $\Delta\mathbf{v}$ will approach the *tangent to the hodograph*, and so $\mathbf{a} = \lim_{\Delta t \rightarrow 0} (\Delta\mathbf{v}/\Delta t)$, or

$$\mathbf{a} = \frac{d\mathbf{v}}{dt} \quad (12-9)$$


Substituting Eq. 12-7 into this result, we can also write

$$\mathbf{a} = \frac{d^2\mathbf{r}}{dt^2}$$


By definition of the derivative, \mathbf{a} acts *tangent to the hodograph*, Fig. 12-16*f*, and, *in general it is not tangent to the path of motion*, Fig. 12-16*g*. To clarify this point, realize that $\Delta\mathbf{v}$ and consequently \mathbf{a} must account for the change made in *both* the magnitude *and* direction of the velocity \mathbf{v} as the particle moves from one point to the next along the path, Fig. 12-16*d*. However, in order for the particle to follow any curved path, the directional change always “swings” the velocity vector toward the “inside” or “concave side” of the path, and therefore \mathbf{a} *cannot* remain tangent to the path. In summary, \mathbf{v} is always tangent to the *path* and \mathbf{a} is always tangent to the *hodograph*.

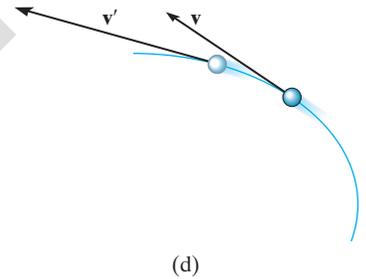


(d)



(e)

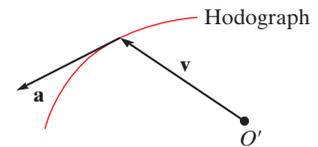

(f)

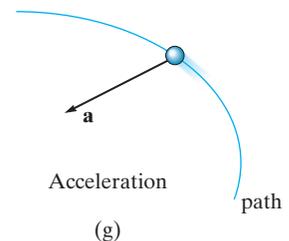

(g)

Fig. 12-16

12.5 Curvilinear Motion: Rectangular Components

Occasionally the motion of a particle can best be described along a path that can be expressed in terms of its x, y, z coordinates.

Position. If the particle is at point (x, y, z) on the curved path s shown in Fig. 12–17a, then its location is defined by the *position vector*

$$\mathbf{r} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k} \quad (12-10)$$

When the particle moves, the x, y, z components of \mathbf{r} will be functions of time; i.e., $x = x(t), y = y(t), z = z(t)$, so that $\mathbf{r} = \mathbf{r}(t)$.

At any instant the *magnitude* of \mathbf{r} is defined from Eq. B–3 in Appendix B as

$$r = \sqrt{x^2 + y^2 + z^2}$$

And the *direction* of \mathbf{r} is specified by the unit vector $\mathbf{u}_r = \mathbf{r}/r$.

Velocity. The first time derivative of \mathbf{r} yields the velocity of the particle. Hence,

$$\mathbf{v} = \frac{d\mathbf{r}}{dt} = \frac{d}{dt}(x\mathbf{i}) + \frac{d}{dt}(y\mathbf{j}) + \frac{d}{dt}(z\mathbf{k})$$

When taking this derivative, it is necessary to account for changes in *both* the magnitude and direction of each of the vector's components. For example, the derivative of the \mathbf{i} component of \mathbf{r} is


$$\frac{d}{dt}(x\mathbf{i}) = \frac{dx}{dt}\mathbf{i} + x\frac{d\mathbf{i}}{dt}$$

The second term on the right side is zero, provided the x, y, z reference frame is *fixed*, and therefore the *direction* (and the *magnitude*) of \mathbf{i} does not change with time. Differentiation of the \mathbf{j} and \mathbf{k} components may be carried out in a similar manner, which yields the final result,


$$\mathbf{v} = \frac{d\mathbf{r}}{dt} = v_x\mathbf{i} + v_y\mathbf{j} + v_z\mathbf{k} \quad (12-11)$$

where

$$v_x = \dot{x} \quad v_y = \dot{y} \quad v_z = \dot{z} \quad (12-12)$$

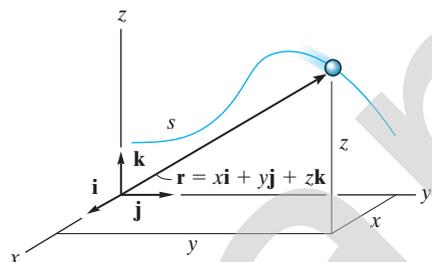

Position
(a)

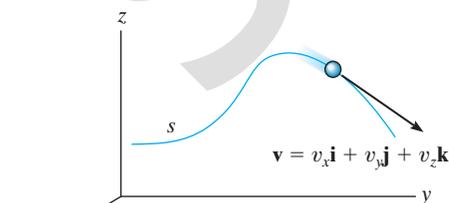

Velocity
(b)

Fig. 12–17

The “dot” notation \dot{x} , \dot{y} , \dot{z} represents the first time derivatives of $x = x(t)$, $y = y(t)$, $z = z(t)$, respectively.

The velocity has a *magnitude* that is found from

$$v = \sqrt{v_x^2 + v_y^2 + v_z^2}$$

and a *direction* that is specified by the unit vector $\mathbf{u}_v = \mathbf{v}/v$. As discussed in Sec. 12.4, this direction is *always tangent to the path*, as shown in Fig. 12–17b.

Acceleration. The acceleration of the particle is obtained by taking the first time derivative of Eq. 12–11 (or the second time derivative of Eq. 12–10). We have

$$\mathbf{a} = \frac{d\mathbf{v}}{dt} = a_x\mathbf{i} + a_y\mathbf{j} + a_z\mathbf{k} \quad (12-13)$$

where


$$\begin{aligned} a_x &= \dot{v}_x = \ddot{x} \\ a_y &= \dot{v}_y = \ddot{y} \\ a_z &= \dot{v}_z = \ddot{z} \end{aligned} \quad (12-14)$$

Here a_x , a_y , a_z represent, respectively, the first time derivatives of $v_x = v_x(t)$, $v_y = v_y(t)$, $v_z = v_z(t)$, or the second time derivatives of the functions $x = x(t)$, $y = y(t)$, $z = z(t)$.

The acceleration has a *magnitude*

$$a = \sqrt{a_x^2 + a_y^2 + a_z^2}$$

and a *direction* specified by the unit vector $\mathbf{u}_a = \mathbf{a}/a$. Since \mathbf{a} represents the time rate of *change* in both the magnitude and direction of the velocity, in general \mathbf{a} will *not* be tangent to the path, Fig. 12–17c.

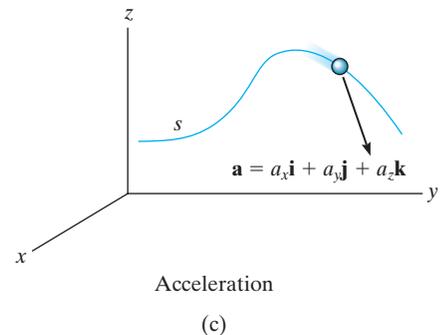

Important Points

- Curvilinear motion can cause changes in *both* the magnitude and direction of the position, velocity, and acceleration vectors.
- The velocity vector is always directed *tangent* to the path.
- In general, the acceleration vector is *not* tangent to the path, but rather, it is tangent to the hodograph.
- If the motion is described using rectangular coordinates, then the components along each of the axes do not change direction, only their magnitude and sense (algebraic sign) will change.
- By considering the component motions, the change in magnitude and direction of the particle's position and velocity are automatically taken into account.

Procedure for Analysis

Coordinate System.

- A rectangular coordinate system can be used to solve problems for which the motion can conveniently be expressed in terms of its x , y , z components.

Kinematic Quantities.

- Since *rectilinear motion* occurs along *each coordinate axis*, the motion along each axis is found using $v = ds/dt$ and $a = dv/dt$; or in cases where the motion is not expressed as a function of time, the equation $a ds = v dv$ can be used.
- In two dimensions, the equation of the path $y = f(x)$ can be used to relate the x and y components of velocity and acceleration by applying the chain rule of calculus. A review of this concept is given in Appendix C.
- Once the x , y , z components of \mathbf{v} and \mathbf{a} have been determined, the magnitudes of these vectors are found from the Pythagorean theorem, Eq. B-3, and their coordinate direction angles from the components of their unit vectors, Eqs. B-4 and B-5.

EXAMPLE 12.9

At any instant the horizontal position of the weather balloon in Fig. 12–18a is defined by $x = (2t)$ m, where t is in seconds. If the equation of the path is $y = x^2/5$, determine the magnitude and direction of the velocity and the acceleration when $t = 2$ s.

SOLUTION

Velocity. The velocity component in the x direction is

$$v_x = \dot{x} = \frac{d}{dt}(2t) = 2 \text{ m/s} \rightarrow$$

To find the relationship between the velocity components we will use the chain rule of calculus. When $t = 2$ s, $x = 2(2) = 4$ m, Fig. 12–18a, and so

$$v_y = \dot{y} = \frac{d}{dt}(x^2/5) = 2x\dot{x}/5 = 2(4)(2)/5 = 3.20 \text{ m/s} \uparrow$$

When $t = 2$ s, the magnitude of velocity is therefore

$$v = \sqrt{(2 \text{ m/s})^2 + (3.20 \text{ m/s})^2} = 3.77 \text{ m/s} \quad \text{Ans.}$$

The direction is tangent to the path, Fig. 12–18b, where

$$\theta_v = \tan^{-1} \frac{v_y}{v_x} = \tan^{-1} \frac{3.20}{2} = 58.0^\circ \quad \text{Ans.}$$

Acceleration. The relationship between the acceleration components is determined using the chain rule. (See Appendix C.) We have

$$a_x = \dot{v}_x = \frac{d}{dt}(2) = 0$$

$$a_y = \dot{v}_y = \frac{d}{dt}(2x\dot{x}/5) = 2(\dot{x})\dot{x}/5 + 2x(\ddot{x})/5$$


$$= 2(2)^2/5 + 2(4)(0)/5 = 1.60 \text{ m/s}^2 \uparrow$$

Thus,


$$a = \sqrt{(0)^2 + (1.60)^2} = 1.60 \text{ m/s}^2 \quad \text{Ans.}$$

The direction of \mathbf{a} , as shown in Fig. 12–18c, is


$$\theta_a = \tan^{-1} \frac{1.60}{0} = 90^\circ \quad \text{Ans.}$$

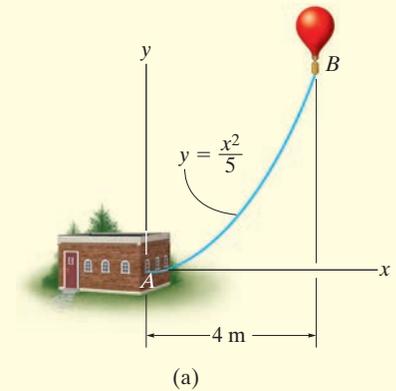

(a)



(b)

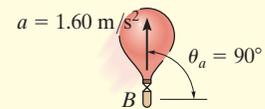

(c)

Fig. 12–18

NOTE: It is also possible to obtain v_y and a_y by first expressing $y = f(t) = (2t)^2/5 = 0.8t^2$ and then taking successive time derivatives.

EXAMPLE 12.10



For a short time, the path of the plane in Fig. 12–19a is described by $y = (0.001x^2)$ m. If the plane is rising with a constant upward velocity of 10 m/s, determine the magnitudes of the velocity and acceleration of the plane when it reaches an altitude of $y = 100$ m.

SOLUTION

When $y = 100$ m, then $100 = 0.001x^2$ or $x = 316.2$ m. Also, due to constant velocity $v_y = 10$ m/s, so

$$y = v_y t; \quad 100 \text{ m} = (10 \text{ m/s}) t \quad t = 10 \text{ s}$$

Velocity. Using the chain rule (see Appendix C) to find the relationship between the velocity components, we have

$$y = 0.001x^2$$

$$v_y = \dot{y} = \frac{d}{dt}(0.001x^2) = (0.002x)\dot{x} = 0.002xv_x \quad (1)$$

Thus

$$10 \text{ m/s} = 0.002(316.2 \text{ m})(v_x)$$

$$v_x = 15.81 \text{ m/s}$$

The magnitude of the velocity is therefore

$$v = \sqrt{v_x^2 + v_y^2} = \sqrt{(15.81 \text{ m/s})^2 + (10 \text{ m/s})^2} = 18.7 \text{ m/s} \quad \text{Ans.}$$

Acceleration. Using the chain rule, the time derivative of Eq. (1) gives the relation between the acceleration components.

$$a_y = \dot{v}_y = (0.002\dot{x})\dot{x} + 0.002x(\ddot{x}) = 0.002(v_x^2 + xa_x)$$

When $x = 316.2$ m, $v_x = 15.81$ m/s, $\dot{v}_y = a_y = 0$,

$$0 = 0.002[(15.81 \text{ m/s})^2 + 316.2 \text{ m}(a_x)]$$

$$a_x = -0.791 \text{ m/s}^2$$


The magnitude of the plane's acceleration is therefore

$$a = \sqrt{a_x^2 + a_y^2} = \sqrt{(-0.791 \text{ m/s}^2)^2 + (0 \text{ m/s}^2)^2}$$


$$= 0.791 \text{ m/s}^2 \quad \text{Ans.}$$

Fig. 12–19

These results are shown in Fig. 12–19b.

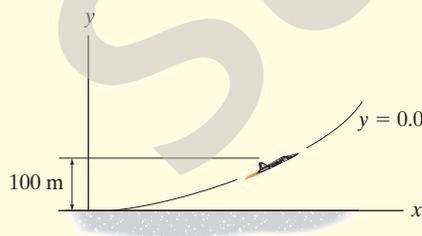

(a)

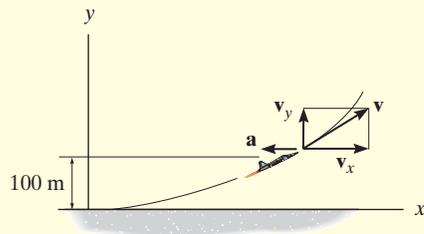

(b)

12.6 Motion of a Projectile

The free-flight motion of a projectile is often studied in terms of its rectangular components. To illustrate the kinematic analysis, consider a projectile launched at point (x_0, y_0) , with an initial velocity of \mathbf{v}_0 , having components $(\mathbf{v}_0)_x$ and $(\mathbf{v}_0)_y$, Fig. 12–20. When air resistance is neglected, the only force acting on the projectile is its weight, which causes the projectile to have a *constant downward acceleration* of approximately $a_c = g = 9.81 \text{ m/s}^2$.*

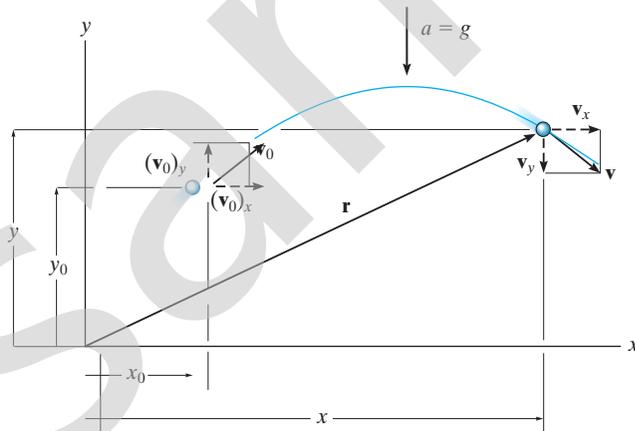


Fig. 12–20

Horizontal Motion. Since $a_x = 0$, application of the constant acceleration equations, 12–4 to 12–6, yields

$$\begin{aligned} (\rightarrow) \quad v &= v_0 + a_c t & v_x &= (v_0)_x \\ (\rightarrow) \quad x &= x_0 + v_0 t + \frac{1}{2} a_c t^2; & x &= x_0 + (v_0)_x t \\ (\rightarrow) \quad v^2 &= v_0^2 + 2a_c(x - x_0); & v_x &= (v_0)_x \end{aligned}$$


The first and last equations indicate that *the horizontal component of velocity always remains constant during the motion.*

Vertical Motion. Since the positive y axis is directed upward, then $a_y = -g$. Applying Eqs. 12–4 to 12–6, we get

$$\begin{aligned} (+\uparrow) \quad v &= v_0 + a_c t; & v_y &= (v_0)_y - gt \\ (+\uparrow) \quad y &= y_0 + v_0 t + \frac{1}{2} a_c t^2; & y &= y_0 + (v_0)_y t - \frac{1}{2} g t^2 \\ (+\uparrow) \quad v^2 &= v_0^2 + 2a_c(y - y_0); & v_y^2 &= (v_0)_y^2 - 2g(y - y_0) \end{aligned}$$

Recall that the last equation can be formulated on the basis of eliminating the time t from the first two equations, and therefore *only two of the above three equations are independent of one another.*

*This assumes that the earth's gravitational field does not vary with altitude.

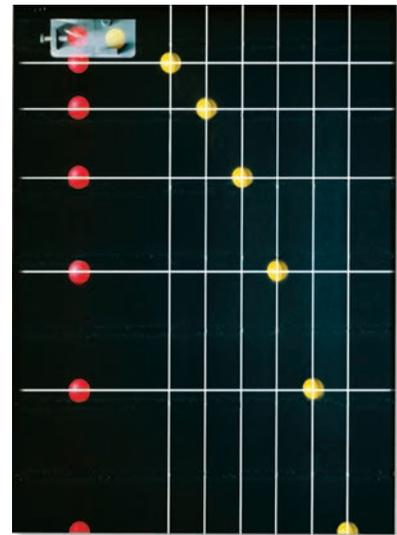

Each picture in this sequence is taken after the same time interval. The red ball falls from rest, whereas the yellow ball is given a horizontal velocity when released. Both balls accelerate downward at the same rate, and so they remain at the same elevation at any instant. This acceleration causes the difference in elevation between the balls to increase between successive photos. Also, note the horizontal distance between successive photos of the yellow ball is constant since the velocity in the horizontal direction remains constant.



Once thrown, the basketball follows a parabolic trajectory.



Gravel falling off the end of this conveyor belt follows a path that can be predicted using the equations of constant acceleration. In this way the location of the accumulated pile can be determined. Rectangular coordinates are used for the analysis since the acceleration is only in the vertical direction.

To summarize, problems involving the motion of a projectile can have at most three unknowns since only three independent equations can be written; that is, *one* equation in the *horizontal direction* and *two* in the *vertical direction*. Once v_x and v_y are obtained, the resultant velocity \mathbf{v} , which is *always tangent* to the path, can be determined by the *vector sum* as shown in Fig. 12–20.

Procedure for Analysis

Coordinate System.

- Establish the fixed x, y coordinate axes and sketch the trajectory of the particle. Between any *two points* on the path specify the given problem data and identify the *three unknowns*. In all cases the acceleration of gravity acts downward and equals 9.81 m/s^2 . The particle's initial and final velocities should be represented in terms of their x and y components.
- Remember that positive and negative position, velocity, and acceleration components always act in accordance with their associated coordinate directions.

Kinematic Equations.

- Depending upon the known data and what is to be determined, a choice should be made as to which three of the following four equations should be applied between the two points on the path to obtain the most direct solution to the problem.

Horizontal Motion.

- The *velocity* in the horizontal or x direction is *constant*, i.e., $v_x = (v_0)_x$, and

$$x = x_0 + (v_0)_x t$$

Vertical Motion.

- In the vertical or y direction *only two* of the following three equations can be used for solution.

$$v_y = (v_0)_y + a_c t$$


$$y = y_0 + (v_0)_y t + \frac{1}{2} a_c t^2$$

$$v_y^2 = (v_0)_y^2 + 2a_c(y - y_0)$$

For example, if the particle's final velocity v_y is not needed, then the first and third of these equations will not be useful.

EXAMPLE 12.11

A sack slides off the ramp, shown in Fig. 12–21, with a horizontal velocity of 12 m/s. If the height of the ramp is 6 m from the floor, determine the time needed for the sack to strike the floor and the range R where sacks begin to pile up.

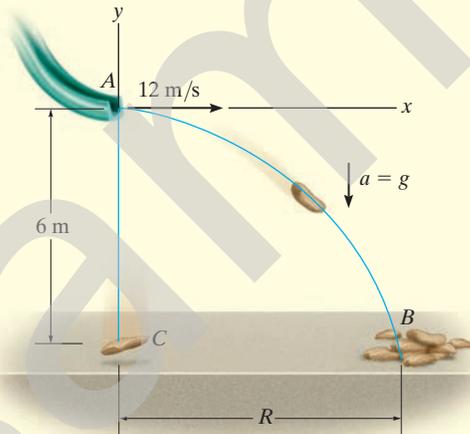**Fig. 12–21****SOLUTION**

Coordinate System. The origin of coordinates is established at the beginning of the path, point A , Fig. 12–21. The initial velocity of a sack has components $(v_A)_x = 12 \text{ m/s}$ and $(v_A)_y = 0$. Also, between points A and B the acceleration is $a_y = -9.81 \text{ m/s}^2$. Since $(v_B)_x = (v_A)_x = 12 \text{ m/s}$, the three unknowns are $(v_B)_y$, R , and the time of flight t_{AB} . Here we do not need to determine $(v_B)_y$.

Vertical Motion. The vertical distance from A to B is known, and therefore we can obtain a direct solution for t_{AB} by using the equation

$$\begin{aligned} (+\uparrow) \quad y_B &= y_A + (v_A)_y t_{AB} + \frac{1}{2} a_c t_{AB}^2 \\ -6 \text{ m} &= 0 + 0 + \frac{1}{2} (-9.81 \text{ m/s}^2) t_{AB}^2 \\ t_{AB} &= 1.11 \text{ s} \quad \text{Ans.} \end{aligned}$$

Horizontal Motion. Since t_{AB} has been calculated, R is determined as follows:

$$\begin{aligned} (\rightarrow) \quad x_B &= x_A + (v_A)_x t_{AB} \\ R &= 0 + 12 \text{ m/s} (1.11 \text{ s}) \\ R &= 13.3 \text{ m} \quad \text{Ans.} \end{aligned}$$

NOTE: The calculation for t_{AB} also indicates that if a sack were released from rest at A , it would take the same amount of time to strike the floor at C , Fig. 12–21.

EXAMPLE 12.12

The chipping machine is designed to eject wood chips at $v_O = 7.5$ m/s as shown in Fig. 12–22. If the tube is oriented at 30° from the horizontal, determine how high, h , the chips strike the pile if at this instant they land on the pile 6 m from the tube.

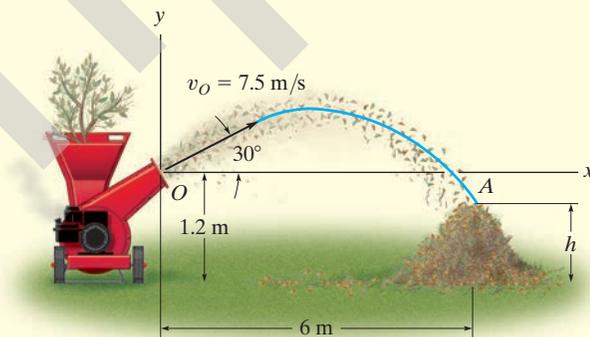


Fig. 12–22

SOLUTION

Coordinate System. When the motion is analyzed between points O and A , the three unknowns are the height h , time of flight t_{OA} , and vertical component of velocity $(v_A)_y$. [Note that $(v_A)_x = (v_O)_x$.] With the origin of coordinates at O , Fig. 12–22, the initial velocity of a chip has components of

$$(v_O)_x = (7.5 \cos 30^\circ) \text{ m/s} = 6.50 \text{ m/s} \rightarrow$$

$$(v_O)_y = (7.5 \sin 30^\circ) \text{ m/s} = 3.75 \text{ m/s} \uparrow$$

Also, $(v_A)_x = (v_O)_x = 6.50$ m/s and $a_y = -9.81$ m/s². Since we do not need to determine $(v_A)_y$, we have

Horizontal Motion.

$$\begin{aligned} (\rightarrow) \quad x_A &= x_O + (v_O)_x t_{OA} \\ 6 \text{ m} &= 0 + (6.50 \text{ m/s}) t_{OA} \\ t_{OA} &= 0.923 \text{ s} \end{aligned}$$

Vertical Motion. Relating t_{OA} to the initial and final elevations of a chip, we have

$$\begin{aligned} (+\uparrow) \quad y_A &= y_O + (v_O)_y t_{OA} + \frac{1}{2} a_c t_{OA}^2 \\ (h - 1.2 \text{ m}) &= 0 + (3.75 \text{ m/s})(0.923 \text{ s}) + \frac{1}{2}(-9.81 \text{ m/s}^2)(0.923 \text{ s})^2 \\ h &= 0.483 \text{ m} \end{aligned} \quad \text{Ans.}$$

NOTE: We can determine $(v_A)_y$ by using $(v_A)_y = (v_O)_y + a_c t_{OA}$.

EXAMPLE 12.13

The track for this racing event was designed so that riders jump off the slope at 30° , from a height of 1 m. During a race it was observed that the rider shown in Fig. 12–23*a* remained in mid air for 1.5 s. Determine the speed at which he was traveling off the ramp, the horizontal distance he travels before striking the ground, and the maximum height he attains. Neglect the size of the bike and rider.



(a)

SOLUTION

Coordinate System. As shown in Fig. 12–23*b*, the origin of the coordinates is established at *A*. Between the end points of the path *AB* the three unknowns are the initial speed v_A , range R , and the vertical component of velocity $(v_B)_y$.

Vertical Motion. Since the time of flight and the vertical distance between the ends of the path are known, we can determine v_A .

$$\begin{aligned}
 (+\uparrow) \quad y_B &= y_A + (v_A)_y t_{AB} + \frac{1}{2} a_c t_{AB}^2 \\
 -1 \text{ m} &= 0 + v_A \sin 30^\circ (1.5 \text{ s}) + \frac{1}{2} (-9.81 \text{ m/s}^2) (1.5 \text{ s})^2 \\
 v_A &= 13.38 \text{ m/s} = 13.4 \text{ m/s} \quad \text{Ans.}
 \end{aligned}$$

Horizontal Motion. The range R can now be determined.


$$\begin{aligned}
 (\rightarrow) \quad x_B &= x_A + (v_A)_x t_{AB} \\
 R &= 0 + 13.38 \cos 30^\circ \text{ m/s} (1.5 \text{ s}) \\
 &= 17.4 \text{ m} \quad \text{Ans.}
 \end{aligned}$$

In order to find the maximum height h we will consider the path *AC*, Fig. 12–23*b*. Here the three unknowns are the time of flight t_{AC} , the horizontal distance from *A* to *C*, and the height h . At the maximum height $(v_C)_y = 0$, and since v_A is known, we can determine h directly without considering t_{AC} using the following equation.

$$\begin{aligned}
 (v_C)_y^2 &= (v_A)_y^2 + 2a_c[y_C - y_A] \\
 0^2 &= (13.38 \sin 30^\circ \text{ m/s})^2 + 2(-9.81 \text{ m/s}^2)[(h - 1 \text{ m}) - 0] \\
 h &= 3.28 \text{ m} \quad \text{Ans.}
 \end{aligned}$$

NOTE: Show that the bike will strike the ground at *B* with a velocity having components of

$$(v_B)_x = 11.6 \text{ m/s} \rightarrow, \quad (v_B)_y = 8.02 \text{ m/s} \downarrow$$

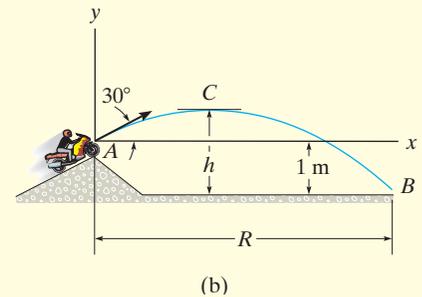**Fig. 12–23**

PRELIMINARY PROBLEMS


P12-3. Use the chain-rule and find \dot{y} and \ddot{y} in terms of x , \dot{x} and \ddot{x} if

a) $y = 4x^2$

b) $y = 3e^x$


c) $y = 6 \sin x$

P12-5. The particle travels from A to B . Identify the three unknowns, and write the three equations needed to solve for them.

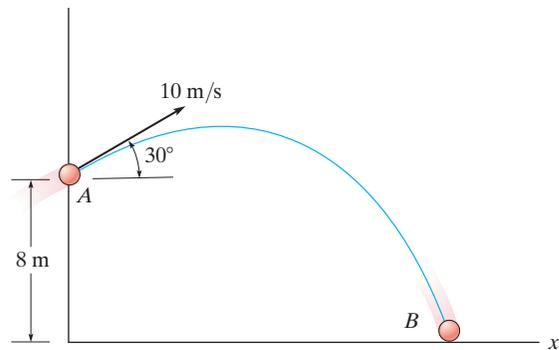


Prob. P12-5

P12-4. The particle travels from A to B . Identify the three unknowns, and write the three equations needed to solve for them.

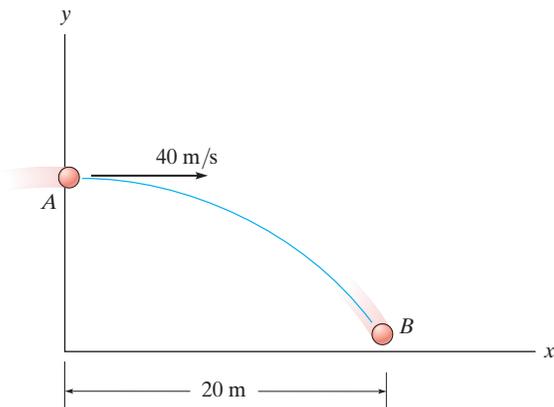

Prob. P12-4

P12-6. The particle travels from A to B . Identify the three unknowns, and write the three equations needed to solve for them.

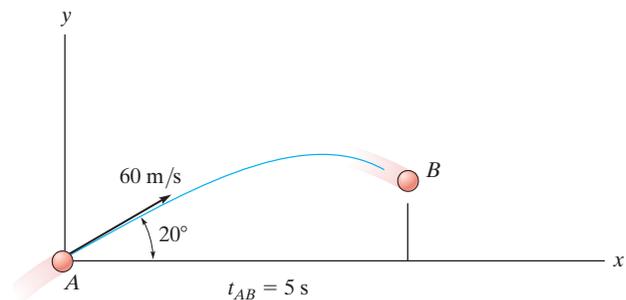


Prob. P12-6

FUNDAMENTAL PROBLEMS

12


F12-15. If the x and y components of a particle's velocity are $v_x = (32t)$ m/s and $v_y = 8$ m/s, determine the equation of the path $y = f(x)$, if $x = 0$ and $y = 0$ when $t = 0$.

F12-16. A particle is traveling along the straight path. If its position along the x axis is $x = (8t)$ m, where t is in seconds, determine its speed when $t = 2$ s.

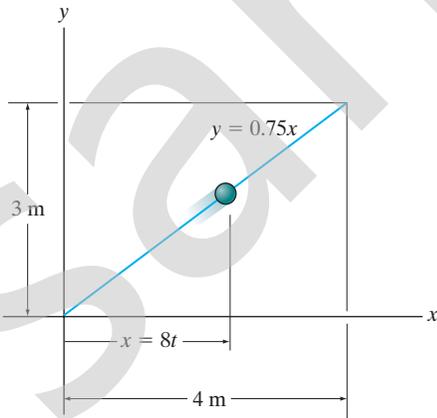


Prob. F12-16

F12-17. A particle is constrained to travel along the path. If $x = (4t^4)$ m, where t is in seconds, determine the magnitude of the particle's velocity and acceleration when $t = 0.5$ s.

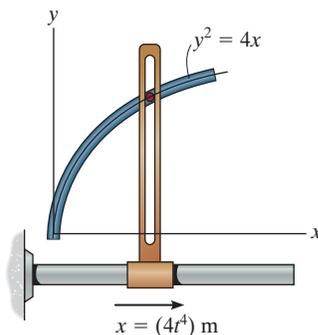


Prob. F12-17

F12-18. A particle travels along a straight-line path $y = 0.5x$. If the x component of the particle's velocity is $v_x = (2t^2)$ m/s, where t is in seconds, determine the magnitude of the particle's velocity and acceleration when $t = 4$ s.

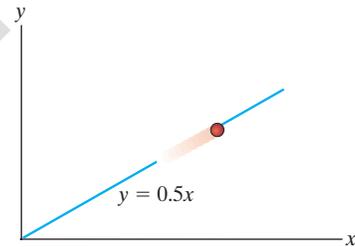


Prob. F12-18

F12-19. A particle is traveling along the parabolic path $y = 0.25x^2$. If $x = 8$ m, $v_x = 8$ m/s, and $a_x = 4$ m/s² when $t = 2$ s, determine the magnitude of the particle's velocity and acceleration at this instant.

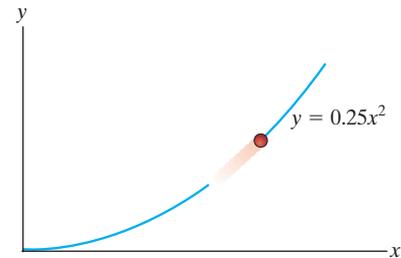

Prob. F12-19

F12-20. The box slides down the slope described by the equation $y = (0.05x^2)$ m, where x is in meters. If the box has x components of velocity and acceleration of $v_x = -3$ m/s and $a_x = -1.5$ m/s² at $x = 5$ m, determine the y components of the velocity and the acceleration of the box at this instant.

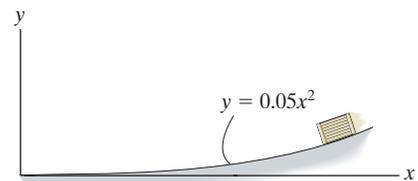


Prob. F12-20

12


F12-21. The ball is kicked from point A with the initial velocity $v_A = 10$ m/s. Determine the maximum height h it reaches.

F12-22. The ball is kicked from point A with the initial velocity $v_A = 10$ m/s. Determine the range R , and the speed when the ball strikes the ground.

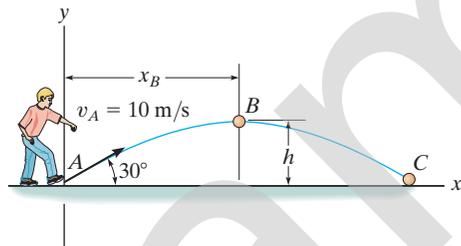


Prob. F12-21/22

F12-23. Determine the speed at which the basketball at A must be thrown at the angle of 30° so that it makes it to the basket at B .

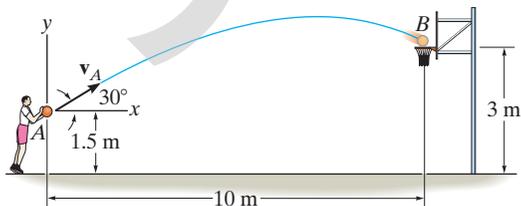


Prob. F12-23

F12-24. Water is sprayed at an angle of 90° from the slope at 20 m/s. Determine the range R .

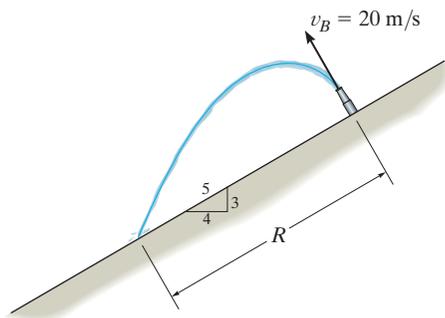


Prob. F12-24

F12-25. A ball is thrown from A . If it is required to clear the wall at B , determine the minimum magnitude of its initial velocity v_A .

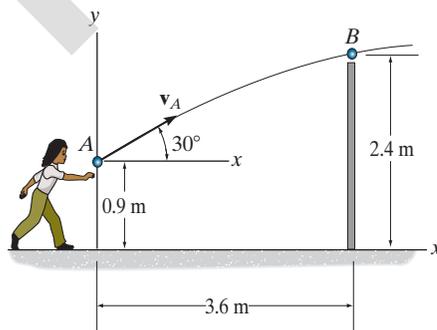

Prob. F12-25

F12-26. A projectile is fired with an initial velocity of $v_A = 150$ m/s off the roof of the building. Determine the range R where it strikes the ground at B .

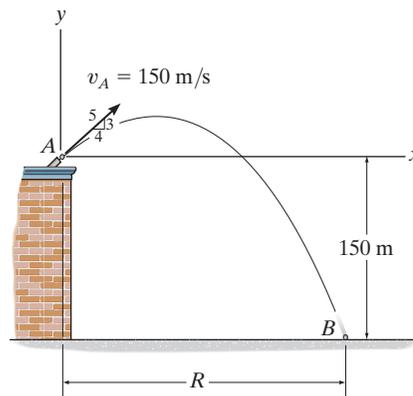

Prob. F12-26

PROBLEMS

12


12-69. The velocity of a particle is given by $v = \{16t^2\mathbf{i} + 4t^3\mathbf{j} + (5t + 2)\mathbf{k}\}$ m/s, where t is in seconds. If the particle is at the origin when $t = 0$, determine the magnitude of the particle's acceleration when $t = 2$ s. Also, what is the x, y, z coordinate position of the particle at this instant?

12-70. The position of a particle is defined by $r = \{5(\cos 2t)\mathbf{i} + 4(\sin 2t)\mathbf{j}\}$ m, where t is in seconds and the arguments for the sine and cosine are given in radians. Determine the magnitudes of the velocity and acceleration of the particle when $t = 1$ s. Also, prove that the path of the particle is elliptical.

12-71. The velocity of a particle is $\mathbf{v} = \{3\mathbf{i} + (6 - 2t)\mathbf{j}\}$ m/s, where t is in seconds. If $\mathbf{r} = \mathbf{0}$ when $t = 0$, determine the displacement of the particle during the time interval $t = 1$ s to $t = 3$ s.

***12-72.** If the velocity of a particle is defined as $\mathbf{v}(t) = \{0.8t^2\mathbf{i} + 12t^{1/2}\mathbf{j} + 5\mathbf{k}\}$ m/s, determine the magnitude and coordinate direction angles α, β, γ of the particle's acceleration when $t = 2$ s.


12-73. When a rocket reaches an altitude of 40 m it begins to travel along the parabolic path $(y - 40)^2 = 160x$, where the coordinates are measured in meters. If the component of velocity in the vertical direction is constant at $v_y = 180$ m/s, determine the magnitudes of the rocket's velocity and acceleration when it reaches an altitude of 80 m.

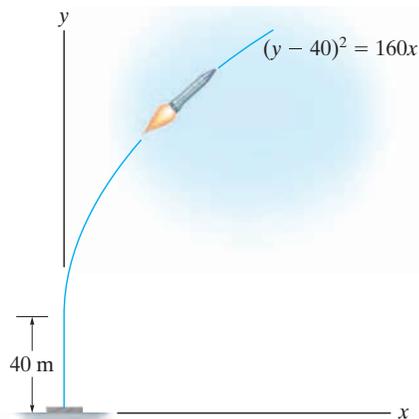

Prob. 12-73


12-74. A particle is traveling with a velocity of $\mathbf{v} = \{3\sqrt{t}e^{-0.2t}\mathbf{i} + 4e^{-0.8t}\mathbf{j}\}$ m/s, where t is in seconds. Determine the magnitude of the particle's displacement from $t = 0$ to $t = 3$ s. Use Simpson's rule with $n = 100$ to evaluate the integrals. What is the magnitude of the particle's acceleration when $t = 2$ s?

12-75. A particle travels along the curve from A to B in 2 s. It takes 4 s for it to go from B to C and then 3 s to go from C to D . Determine its average speed when it goes from A to D .

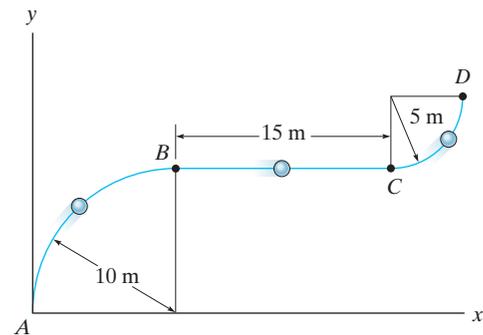

Prob. 12-75

***12-76.** A particle travels along the curve from A to B in 5 s. It takes 8 s for it to go from B to C and then 10 s to go from C to A . Determine its average speed when it goes around the closed path.

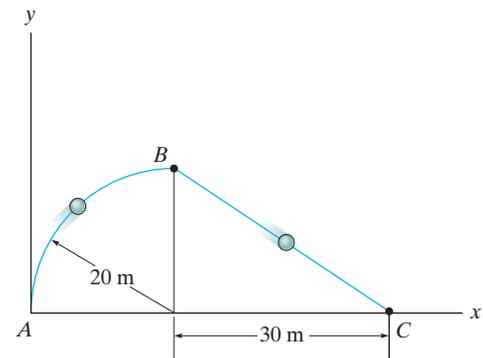


Prob. 12-76

12-77. The position of a crate sliding down a ramp is given by $x = (0.25t^3)$ m, $y = (1.5t^2)$ m, $z = (6 - 0.75t^{5/2})$ m, where t is in seconds. Determine the magnitude of the crate's velocity and acceleration when $t = 2$ s.


12-78. A rocket is fired from rest at $x = 0$ and travels along a parabolic trajectory described by $y^2 = [120(10^3)x]$ m. If the x component of acceleration is $a_x = \left(\frac{1}{4}t^2\right)$ m/s², where t is in seconds, determine the magnitude of the rocket's velocity and acceleration when $t = 10$ s.

12-79. The particle travels along the path defined by the parabola $y = 0.5x^2$. If the component of velocity along the x axis is $v_x = (5t)$ m/s, where t is in seconds, determine the particle's distance from the origin O and the magnitude of its acceleration when $t = 1$ s. When $t = 0$, $x = 0$, $y = 0$.

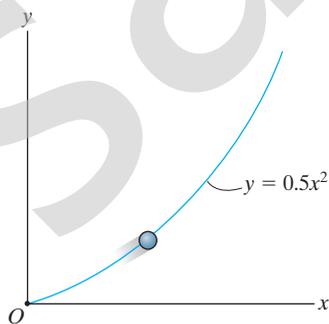


Prob. 12-79

***12-80.** The motorcycle travels with constant speed v_0 along the path that, for a short distance, takes the form of a sine curve. Determine the x and y components of its velocity at any instant on the curve.

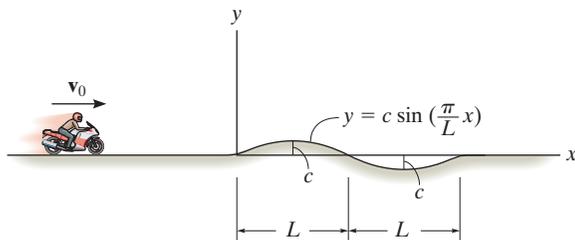


Prob. 12-80

12-81. A particle travels along the curve from A to B in 1 s. If it takes 3 s for it to go from A to C , determine its average velocity when it goes from B to C .

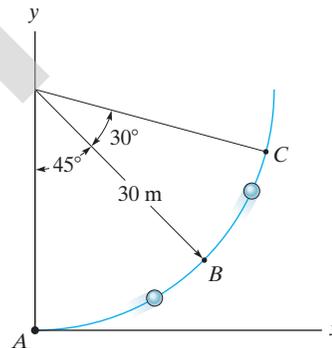


Prob. 12-81

12-82. The roller coaster car travels down the helical path at constant speed such that the parametric equations that define its position are $x = c \sin kt$, $y = c \cos kt$, $z = h - bt$, where c , h , and b are constants. Determine the magnitudes of its velocity and acceleration.

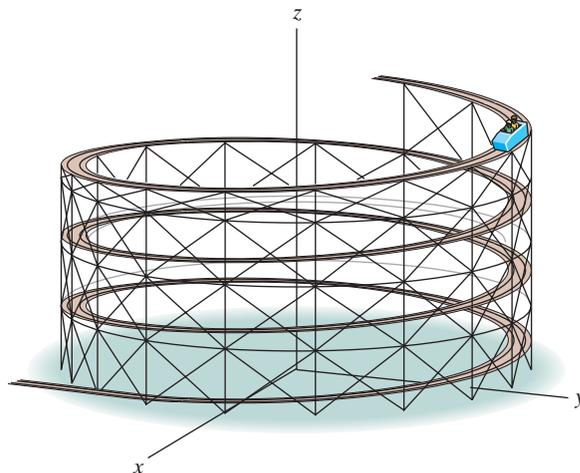


Prob. 12-82

12-83. The flight path of the helicopter as it takes off from A is defined by the parametric equations $x = (2t^2)$ m and $y = (0.04t^3)$ m, where t is the time in seconds. Determine the distance the helicopter is from point A and the magnitudes of its velocity and acceleration when $t = 10$ s.

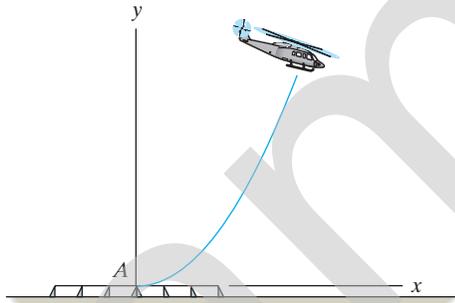


Prob. 12-83

***12-84.** Pegs A and B are restricted to move in the elliptical slots due to the motion of the slotted link. If the link moves with a constant speed of 10 m/s, determine the magnitude of the velocity and acceleration of peg A when $x = 1$ m.

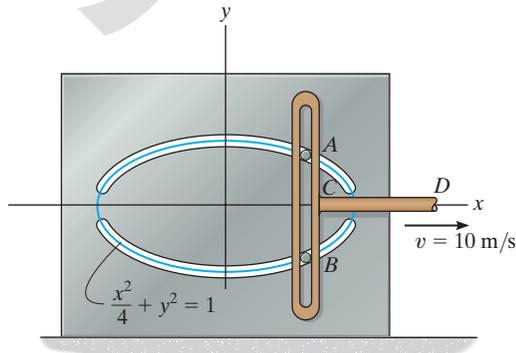


Prob. 12-84

12-85. It is observed that the time for the ball to strike the ground at B is 2.5 s. Determine the speed v_A and angle θ_A at which the ball was thrown.

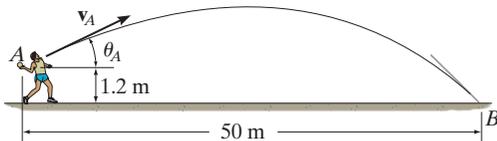


Prob. 12-85

12-86. Neglecting the size of the ball, determine the magnitude v_A of the basketball's initial velocity and its velocity when it passes through the basket.

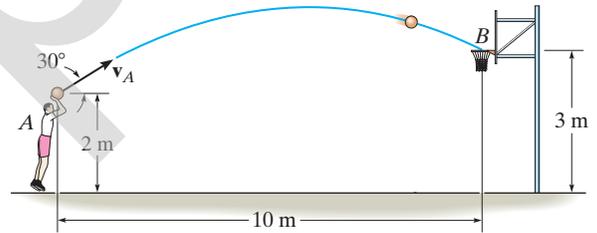


Prob. 12-86

12-87. A projectile is fired from the platform at B . The shooter fires his gun from point A at an angle of 30° . Determine the muzzle speed of the bullet if it hits the projectile at C .

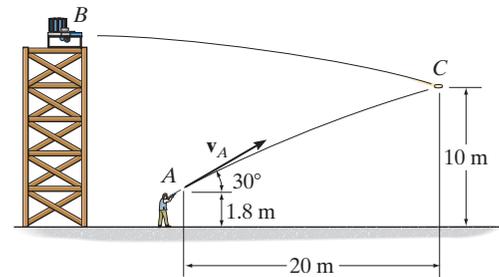

Prob. 12-87


***12-88.** Determine the minimum initial velocity v_0 and the corresponding angle θ_0 at which the ball must be kicked in order for it to just cross over the 3-m high fence.

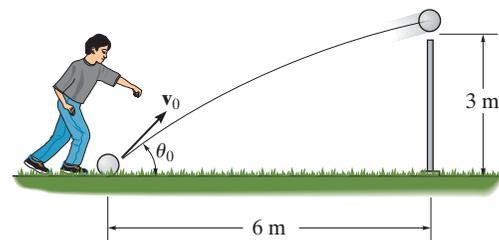

Prob. 12-88

12-89. A projectile is given a velocity \mathbf{v}_0 at an angle ϕ above the horizontal. Determine the distance d to where it strikes the sloped ground. The acceleration due to gravity is g .


12-90. A projectile is given a velocity \mathbf{v}_0 . Determine the angle ϕ at which it should be launched so that d is a maximum. The acceleration due to gravity is g .

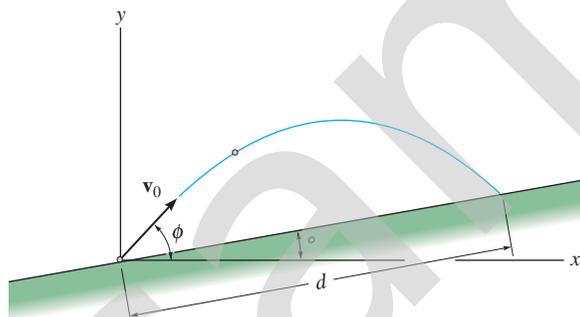

Probs. 12-89/90

12-91. The girl at A can throw a ball at $v_A = 10$ m/s. Calculate the maximum possible range $R = R_{\max}$ and the associated angle θ at which it should be thrown. Assume the ball is caught at B at the same elevation from which it is thrown.


***12-92.** Show that the girl at A can throw the ball to the boy at B by launching it at equal angles measured up or down from a 45° inclination. If $v_A = 10$ m/s, determine the range R if this value is 15° , i.e., $\theta_1 = 45^\circ - 15^\circ = 30^\circ$ and $\theta_2 = 45^\circ + 15^\circ = 60^\circ$. Assume the ball is caught at the same elevation from which it is thrown.

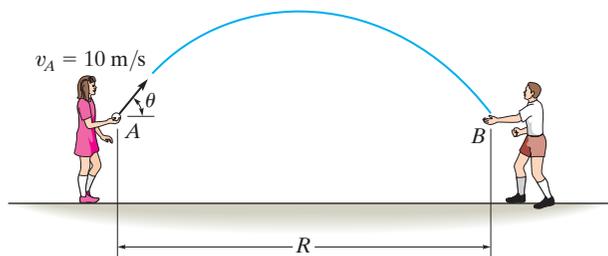

Probs. 12-91/92


12-93. The boy at A attempts to throw a ball over the roof of a barn with an initial speed of $v_A = 15$ m/s. Determine the angle θ_A at which the ball must be thrown so that it reaches its maximum height at C . Also, find the distance d where the boy should stand to make the throw.

12-94. The boy at A attempts to throw a ball over the roof of a barn such that it is launched at an angle $\theta_A = 40^\circ$. Determine the minimum speed v_A at which he must throw the ball so that it reaches its maximum height at C . Also, find the distance d where the boy must stand so that he can make the throw.

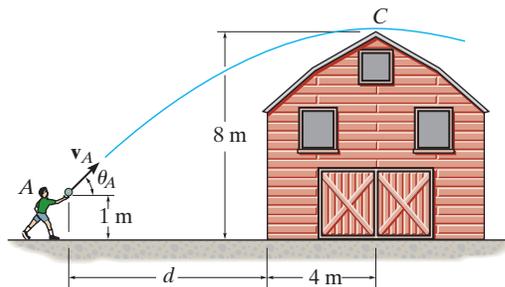


Probs. 12-93/94

12-95. Measurements of a shot recorded on a videotape during a basketball game are shown. The ball passed through the hoop even though it barely cleared the hands of the player B who attempted to block it. Neglecting the size of the ball, determine the magnitude v_A of its initial velocity and the height h of the ball when it passes over player B .

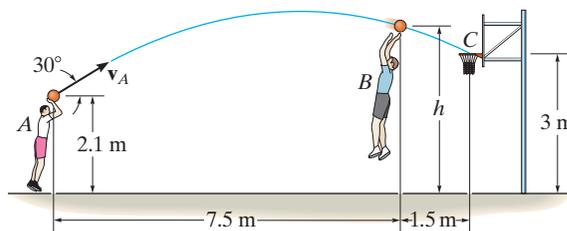

Prob. 12-95


***12-96.** The golf ball is hit at A with a speed of $v_A = 40$ m/s and directed at an angle of 30° with the horizontal as shown. Determine the distance d where the ball strikes the slope at B .

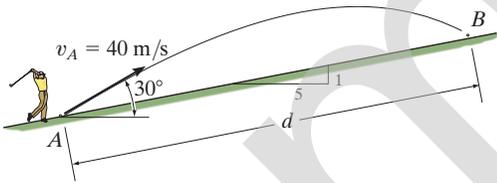

Prob. 12-96


12-97. It is observed that the skier leaves the ramp A at an angle $\theta_A = 25^\circ$ with the horizontal. If he strikes the ground at B , determine his initial speed v_A and the time of flight t_{AB} .

12-98. It is observed that the skier leaves the ramp A at an angle $\theta_A = 25^\circ$ with the horizontal. If he strikes the ground at B , determine his initial speed v_A and the speed at which he strikes the ground.

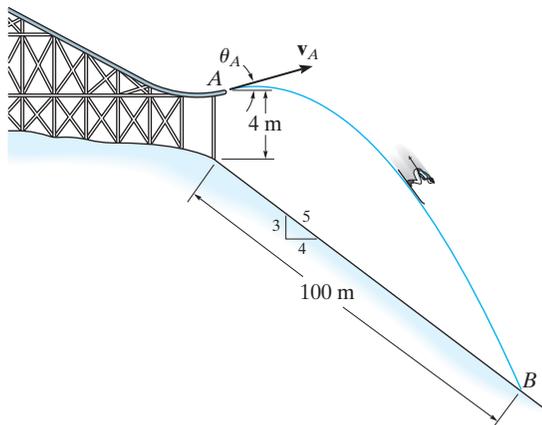



Probs. 12-97/98

12-99. The projectile is launched with a velocity v_0 . Determine the range R , the maximum height h attained, and the time of flight. Express the results in terms of the angle θ and v_0 . The acceleration due to gravity is g .

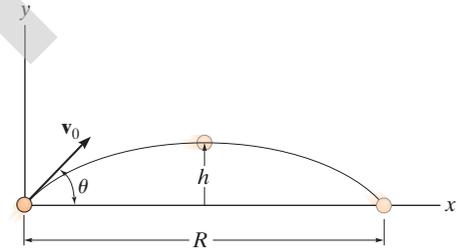


Prob. 12-99

***12-100.** The missile at A takes off from rest and rises vertically to B , where its fuel runs out in 8 s. If the acceleration varies with time as shown, determine the missile's height h_B and speed v_B . If by internal controls the missile is then suddenly pointed 45° as shown, and allowed to travel in free flight, determine the maximum height attained, h_C , and the range R to where it crashes at D .

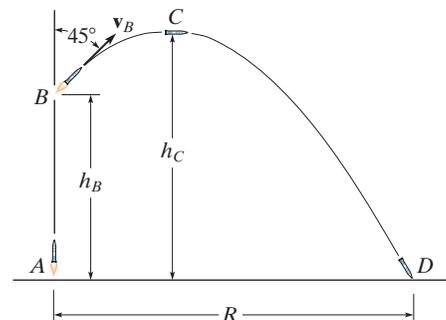


Prob. 12-100

12-101. The velocity of the water jet discharging from the orifice can be obtained from $v = \sqrt{2gh}$, where $h = 2$ m is the depth of the orifice from the free water surface. Determine the time for a particle of water leaving the orifice to reach point B and the horizontal distance x where it hits the surface.

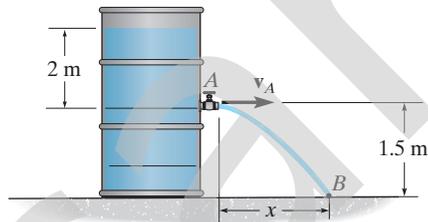

Prob. 12-101


12-102. The man at A wishes to throw two darts at the target at B so that they arrive at the *same time*. If each dart is thrown with a speed of 10 m/s, determine the angles θ_C and θ_D at which they should be thrown and the time between each throw. Note that the first dart must be thrown at $\theta_C (> \theta_D)$, then the second dart is thrown at θ_D .

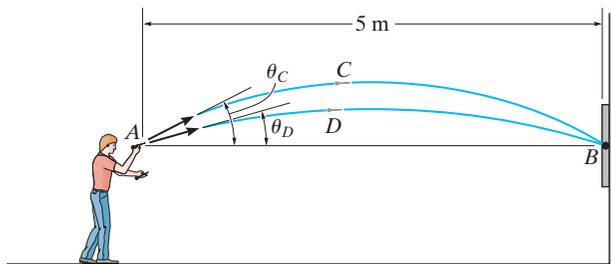

Prob. 12-102


12-103. If the dart is thrown with a speed of 10 m/s, determine the shortest possible time before it strikes the target. Also, what is the corresponding angle θ_A at which it should be thrown, and what is the velocity of the dart when it strikes the target?

***12-104.** If the dart is thrown with a speed of 10 m/s, determine the longest possible time when it strikes the target. Also, what is the corresponding angle θ_A at which it should be thrown, and what is the velocity of the dart when it strikes the target?

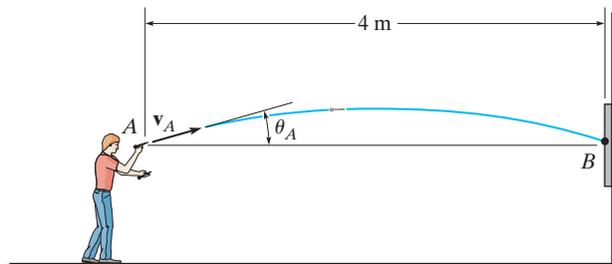


Probs. 12-103/104

12-105. The drinking fountain is designed such that the nozzle is located from the edge of the basin as shown. Determine the maximum and minimum speed at which water can be ejected from the nozzle so that it does not splash over the sides of the basin at B and C .

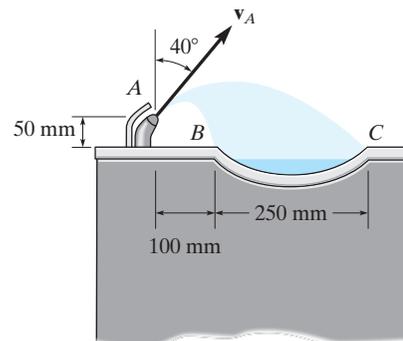


Prob. 12-105

12-106. The balloon A is ascending at the rate $v_A = 12$ km/h and is being carried horizontally by the wind at $v_w = 20$ km/h. If a ballast bag is dropped from the balloon at the instant $h = 50$ m, determine the time needed for it to strike the ground. Assume that the bag was released from the balloon with the same velocity as the balloon. Also, with what speed does the bag strike the ground?

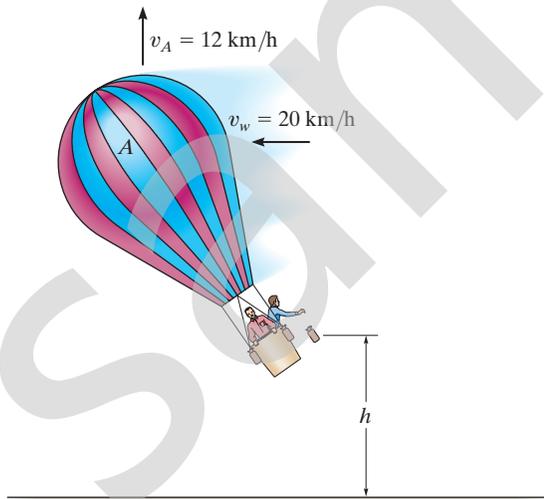


Prob. 12-106

12-107. The snowmobile is traveling at 10 m/s when it leaves the embankment at A . Determine the time of flight from A to B and the range R of the trajectory.

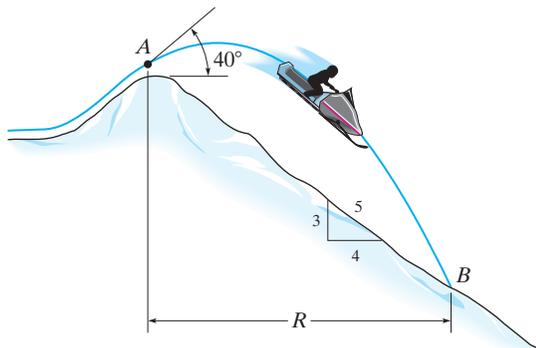


Prob. 12-107

***12-108.** A boy throws a ball at O in the air with a speed v_0 at an angle θ_1 . If he then throws another ball with the same speed v_0 at an angle $\theta_2 < \theta_1$, determine the time between the throws so that the balls collide in midair at B .

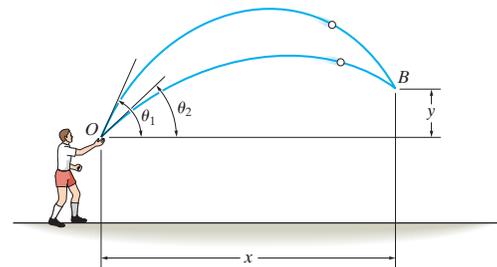

Prob. 12-108

12-109. Small packages traveling on the conveyor belt fall off into a 1-m-long loading car. If the conveyor is running at a constant speed of $v_c = 2$ m/s, determine the smallest and largest distance R at which the end A of the car may be placed from the conveyor so that the packages enter the car.

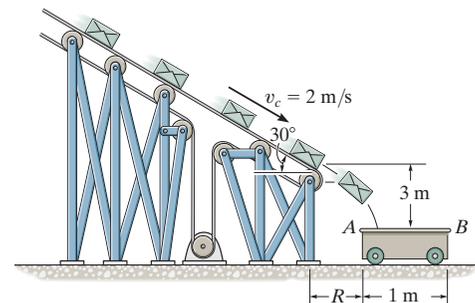

Prob. 12-109

12.7 Curvilinear Motion: Normal and Tangential Components

When the path along which a particle travels is *known*, then it is often convenient to describe the motion using n and t coordinate axes which act normal and tangent to the path, respectively, and at the instant considered have their *origin located at the particle*.

Planar Motion. Consider the particle shown in Fig. 12–24*a*, which moves in a plane along a fixed curve, such that at a given instant it is at position s , measured from point O . We will now consider a coordinate system that has its origin on the curve, and at the instant considered this origin happens to *coincide* with the location of the particle. The t axis is *tangent* to the curve at the point and is positive in the direction of *increasing* s . We will designate this positive direction with the unit vector \mathbf{u}_t . A unique choice for the *normal* axis can be made by noting that geometrically the curve is constructed from a series of differential arc segments ds , Fig. 12–24*b*. Each segment ds is formed from the arc of an associated circle having a *radius of curvature* ρ (rho) and *center of curvature* O' . The normal axis n is perpendicular to the t axis with its positive sense directed *toward* the center of curvature O' , Fig. 12–24*a*. This positive direction, which is *always* on the concave side of the curve, will be designated by the unit vector \mathbf{u}_n . The plane which contains the n and t axes is referred to as the *embracing* or *osculating plane*, and in this case it is fixed in the plane of motion.*

Velocity. Since the particle moves, s is a function of time. As indicated in Sec. 12.4, the particle's velocity \mathbf{v} has a *direction* that is *always tangent to the path*, Fig. 12–24*c*, and a *magnitude* that is determined by taking the time derivative of the path function $s = s(t)$, i.e., $v = ds/dt$ (Eq. 12–8). Hence

$$\mathbf{v} = v\mathbf{u}_t \quad (12-15)$$

where

$$v = \dot{s} \quad (12-16)$$

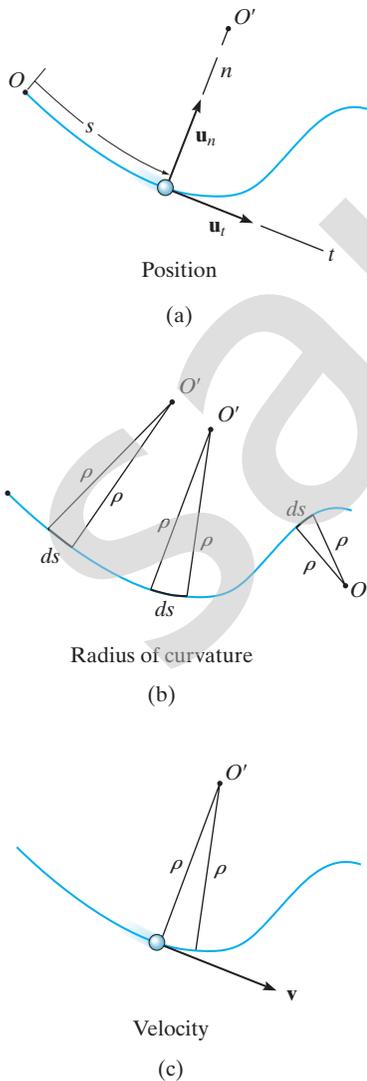


Fig. 12–24

*The osculating plane may also be defined as the plane which has the greatest contact with the curve at a point. It is the limiting position of a plane contacting both the point and the arc segment ds . As noted above, the osculating plane is always coincident with a plane curve; however, each point on a three-dimensional curve has a unique osculating plane.

Acceleration. The acceleration of the particle is the time rate of change of the velocity. Thus,

$$\mathbf{a} = \dot{\mathbf{v}} = \dot{v}\mathbf{u}_t + v\dot{\mathbf{u}}_t \quad (12-17)$$

In order to determine the time derivative $\dot{\mathbf{u}}_t$, note that as the particle moves along the arc ds in time dt , \mathbf{u}_t preserves its magnitude of unity; however, its *direction* changes, and becomes \mathbf{u}'_t , Fig. 12-24d. As shown in Fig. 12-24e, we require $\mathbf{u}'_t = \mathbf{u}_t + d\mathbf{u}_t$. Here $d\mathbf{u}_t$ stretches between the arrowheads of \mathbf{u}_t and \mathbf{u}'_t , which lie on an infinitesimal arc of radius $u_t = 1$. Hence, $d\mathbf{u}_t$ has a *magnitude* of $du_t = (1) d\theta$, and its *direction* is defined by \mathbf{u}_n . Consequently, $d\mathbf{u}_t = d\theta\mathbf{u}_n$, and therefore the time derivative becomes $\dot{\mathbf{u}}_t = \dot{\theta}\mathbf{u}_n$. Since $ds = \rho d\theta$, Fig. 12-24d, then $\dot{\theta} = \dot{s}/\rho$, and therefore

$$\dot{\mathbf{u}}_t = \dot{\theta}\mathbf{u}_n = \frac{\dot{s}}{\rho}\mathbf{u}_n = \frac{v}{\rho}\mathbf{u}_n$$

Substituting into Eq. 12-17, \mathbf{a} can be written as the sum of its two components,

$$\mathbf{a} = a_t\mathbf{u}_t + a_n\mathbf{u}_n \quad (12-18)$$

where


$$a_t = \dot{v} \quad \text{or} \quad a_t ds = v dv \quad (12-19)$$

and


$$a_n = \frac{v^2}{\rho} \quad (12-20)$$

These two mutually perpendicular components are shown in Fig. 12-24f. Therefore, the *magnitude* of acceleration is the positive value of


$$a = \sqrt{a_t^2 + a_n^2} \quad (12-21)$$

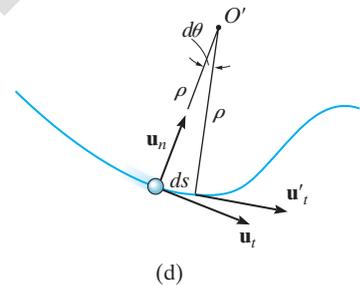

(d)




(e)

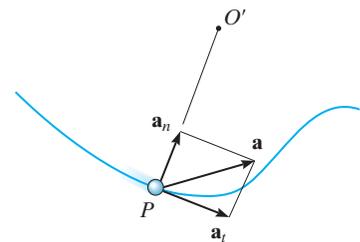

Acceleration

(f)

Fig. 12-24 (cont.)

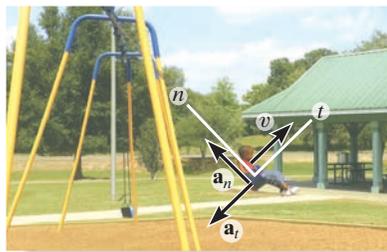

As the boy swings upward with a velocity \mathbf{v} , his motion can be analyzed using n - t coordinates. As he rises, the magnitude of his velocity (speed) is decreasing, and so a_t will be negative. The rate at which the direction of his velocity changes is a_n , which is always positive, that is, towards the center of rotation.

To better understand these results, consider the following two special cases of motion.

1. If the particle moves along a straight line, then $\rho \rightarrow \infty$ and from Eq. 12-20, $a_n = 0$. Thus $a = a_t = \dot{v}$, and we can conclude that the *tangential component of acceleration represents the time rate of change in the magnitude of the velocity*.
2. If the particle moves along a curve with a constant speed, then $a_t = \dot{v} = 0$ and $a = a_n = v^2/\rho$. Therefore, the *normal component of acceleration represents the time rate of change in the direction of the velocity*. Since \mathbf{a}_n always acts towards the center of curvature, this component is sometimes referred to as the *centripetal* (or center seeking) *acceleration*.

As a result of these interpretations, a particle moving along the curved path in Fig. 12-25 will have accelerations directed as shown.

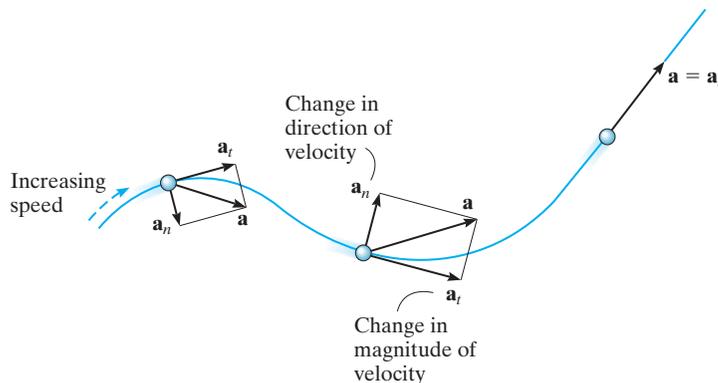


Fig. 12-25

Three-Dimensional Motion. If the particle moves along a space curve, Fig. 12-26, then at a given instant the t axis is uniquely specified; however, an infinite number of straight lines can be constructed normal to the tangent axis. As in the case of planar motion, we will choose the positive n axis directed toward the path's center of curvature O' . This axis is referred to as the *principal normal* to the curve. With the n and t axes so defined, Eqs. 12-15 through 12-21 can be used to determine \mathbf{v} and \mathbf{a} . Since \mathbf{u}_t and \mathbf{u}_n are always perpendicular to one another and lie in the osculating plane, for spatial motion a third unit vector, \mathbf{u}_b , defines the *binormal axis* b which is perpendicular to \mathbf{u}_t and \mathbf{u}_n , Fig. 12-26.

Since the three unit vectors are related to one another by the vector cross product, e.g., $\mathbf{u}_b = \mathbf{u}_t \times \mathbf{u}_n$, Fig. 12-26, it may be possible to use this relation to establish the direction of one of the axes, if the directions of the other two are known. For example, no motion occurs in the \mathbf{u}_b direction, and if this direction and \mathbf{u}_t are known, then \mathbf{u}_n can be determined, where in this case $\mathbf{u}_n = \mathbf{u}_b \times \mathbf{u}_t$, Fig. 12-26. Remember, though, that \mathbf{u}_n is always on the concave side of the curve.

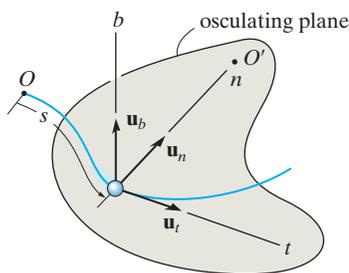


Fig. 12-26

Procedure for Analysis

Coordinate System.

- Provided the *path* of the particle is *known*, we can establish a set of n and t coordinates having a *fixed origin*, which is coincident with the particle at the instant considered.
- The positive tangent axis acts in the direction of motion and the positive normal axis is directed toward the path's center of curvature.

Velocity.

- The particle's *velocity* is always tangent to the path.
- The magnitude of velocity is found from the time derivative of the path function.

$$v = \dot{s}$$

Tangential Acceleration.

- The tangential component of acceleration is the result of the time rate of change in the *magnitude* of velocity. This component acts in the positive s direction if the particle's speed is increasing or in the opposite direction if the speed is decreasing.
- The relations between a_t , v , t , and s are the same as for rectilinear motion, namely,

$$a_t = \dot{v} \quad a_t ds = v dv$$

- If a_t is constant, $a_t = (a_t)_c$, the above equations, when integrated, yield

$$s = s_0 + v_0 t + \frac{1}{2}(a_t)_c t^2$$

$$v = v_0 + (a_t)_c t$$

$$v^2 = v_0^2 + 2(a_t)_c(s - s_0)$$

Normal Acceleration.

- The normal component of acceleration is the result of the time rate of change in the *direction* of the velocity. This component is *always* directed toward the center of curvature of the path, i.e., along the positive n axis.
- The magnitude of this component is determined from

$$a_n = \frac{v^2}{\rho}$$

- If the path is expressed as $y = f(x)$, the radius of curvature ρ at any point on the path is determined from the equation

$$\rho = \frac{[1 + (dy/dx)^2]^{3/2}}{|d^2y/dx^2|}$$

The derivation of this result is given in any standard calculus text.



Once the rotation is constant, the riders will then have only a normal component of acceleration.



Please refer to the Companion Website for the animation: *The Dynamics of a Turning Vehicle Illustrating Force, f*



Motorists traveling along this cloverleaf interchange experience a normal acceleration due to the change in direction of their velocity. A tangential component of acceleration occurs when the cars' speed is increased or decreased.

EXAMPLE 12.14

When the skier reaches point A along the parabolic path in Fig. 12–27*a*, he has a speed of 6 m/s which is increasing at 2 m/s². Determine the direction of his velocity and the direction and magnitude of his acceleration at this instant. Neglect the size of the skier in the calculation.



Please refer to the Companion Website for the animation: *The Forward Velocity of a Skateboarder at Different Heights*

SOLUTION

Coordinate System. Although the path has been expressed in terms of its x and y coordinates, we can still establish the origin of the n, t axes at the fixed point A on the path and determine the components of \mathbf{v} and \mathbf{a} along these axes, Fig. 12–27*a*.

Velocity. By definition, the velocity is always directed tangent to the path. Since $y = \frac{1}{20}x^2$, $dy/dx = \frac{1}{10}x$, then at $x = 10$ m, $dy/dx = 1$. Hence, at A , \mathbf{v} makes an angle of $\theta = \tan^{-1}1 = 45^\circ$ with the x axis, Fig. 12–27*b*. Therefore,

$$v_A = 6 \text{ m/s} \quad 45^\circ \quad \text{Ans.}$$

The acceleration is determined from $\mathbf{a} = \dot{v}\mathbf{u}_t + (v^2/\rho)\mathbf{u}_n$. However, it is first necessary to determine the radius of curvature of the path at A (10 m, 5 m). Since $d^2y/dx^2 = \frac{1}{10}$, then

$$\rho = \frac{[1 + (dy/dx)^2]^{3/2}}{|d^2y/dx^2|} = \frac{[1 + (\frac{1}{10}x)^2]^{3/2}}{|\frac{1}{10}|} \Big|_{x=10 \text{ m}} = 28.28 \text{ m}$$

The acceleration becomes

$$\begin{aligned} \mathbf{a}_A &= \dot{v}\mathbf{u}_t + \frac{v^2}{\rho}\mathbf{u}_n \\ &= 2\mathbf{u}_t + \frac{(6 \text{ m/s})^2}{28.28 \text{ m}}\mathbf{u}_n \\ &= \{2\mathbf{u}_t + 1.273\mathbf{u}_n\} \text{ m/s}^2 \end{aligned}$$

As shown in Fig. 12–27*b*,


$$a = \sqrt{(2 \text{ m/s}^2)^2 + (1.273 \text{ m/s}^2)^2} = 2.37 \text{ m/s}^2$$

$$\phi = \tan^{-1} \frac{2}{1.273} = 57.5^\circ$$


Thus, $45^\circ + 90^\circ + 57.5^\circ - 180^\circ = 12.5^\circ$ so that,

$$a = 2.37 \text{ m/s}^2 \quad 12.5^\circ \quad \text{Ans.}$$

NOTE: By using n, t coordinates, we were able to readily solve this problem through the use of Eq. 12–18, since it accounts for the separate changes in the magnitude and direction of \mathbf{v} .

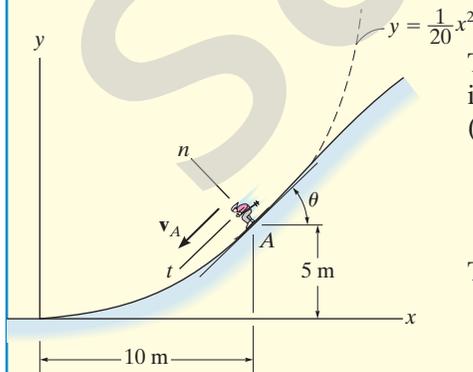

(a)



(b)

Fig. 12–27