

Engineering Mechanics

STATICS & DYNAMICS

Fourteenth Edition



R. C. Hibbeler

ENGINEERING MECHANICS

STATICS AND DYNAMICS

FOURTEENTH EDITION

Sample

ENGINEERING MECHANICS

STATICS AND DYNAMICS

FOURTEENTH EDITION

R. C. HIBBELER

PEARSON

Hoboken Boston Columbus San Francisco New York Indianapolis
London Toronto Sydney Singapore Tokyo Montreal Dubai Madrid
Hong Kong Mexico City Munich Paris Amsterdam Cape Town

Library of Congress Cataloging-in-Publication Data on File

Vice President and Editorial Director, ECS: Marcia Horton
Senior Editor: Norrin Dias
Editorial Assistant: Michelle Bayman
Program and Project Management Team Lead: Scott Disanno
Program Manager: Sandra L. Rodriguez
Project Manager: Rose Kernan
Cover Designer: Black Horse Designs
Art Editor: Gregory Dulles
Senior Digital Producer: Felipe Gonzalez
Operations Specialist: Maura Zaldivar-Garcia
Product Marketing Manager: Bram Van Kempen
Field Marketing Manager: Demetrius Hall
Marketing Assistant: Jon Bryant

Cover Image: Fotog/Getty Images

© 2016 by R.C. Hibbeler
Published by Pearson Prentice Hall
Pearson Education, Inc.
Hoboken, New Jersey 07030

All rights reserved. No part of this book may be reproduced or transmitted in any form or by any means, without permission in writing from the publisher.

Pearson Prentice Hall™ is a trademark of Pearson Education, Inc.

The author and publisher of this book have used their best efforts in preparing this book. These efforts include the development, research, and testing of the theories and programs to determine their effectiveness. The author and publisher shall not be liable in any event for incidental or consequential damages with, or arising out of, the furnishing, performance, or use of these programs.

Pearson Education Ltd., *London*
Pearson Education Australia Pty. Ltd., *Sydney*
Pearson Education Singapore, Pte. Ltd.
Pearson Education North Asia Ltd., *Hong Kong*
Pearson Education Canada, Inc., *Toronto*
Pearson Educación de Mexico, S.A. de C.V.
Pearson Education—Japan, *Tokyo*
Pearson Education Malaysia, Pte. Ltd.
Pearson Education, Inc., *Hoboken, New Jersey*

Printed in the United States of America

10 9 8 7 6 5 4 3 2 1

ISBN-10: 0-13-391542-5
ISBN-13: 978-0-13-391542-6

PEARSON

To the Student

With the hope that this work will stimulate
an interest in Engineering Mechanics
and provide an acceptable guide to its understanding.

Sample

The main purpose of this book is to provide the student with a clear and thorough presentation of the theory and application of engineering mechanics. To achieve this objective, this work has been shaped by the comments and suggestions of hundreds of reviewers in the teaching profession, as well as many of the author's students.

New to this Edition

Preliminary Problems. This new feature can be found throughout the text, and is given just before the Fundamental Problems. The intent here is to test the student's conceptual understanding of the theory. Normally the solutions require little or no calculation, and as such, these problems provide a basic understanding of the concepts before they are applied numerically. All the solutions are given in the back of the text.

Expanded Important Points Sections. Summaries have been added which reinforce the reading material and highlights the important definitions and concepts of the sections.

Re-writing of Text Material. Further clarification of concepts has been included in this edition, and important definitions are now in boldface throughout the text to highlight their importance.

End-of-Chapter Review Problems. All the review problems now have solutions given in the back, so that students can check their work when studying for exams, and reviewing their skills when the chapter is finished.

New Photos. The relevance of knowing the subject matter is reflected by the real-world applications depicted in the over 60 new or updated photos placed throughout the book. These photos generally are used to explain how the relevant principles apply to real-world situations and how materials behave under load.

New Problems. There are approximately 30% new problems that have been added to this edition, which involve applications to many different fields of engineering.

Hallmark Features

Besides the new features mentioned above, other outstanding features that define the contents of the text include the following.

Organization and Approach. Each chapter is organized into well-defined sections that contain an explanation of specific topics, illustrative example problems, and a set of homework problems. The topics within each section are placed into subgroups defined by boldface titles. The purpose of this is to present a structured method for introducing each new definition or concept and to make the book convenient for later reference and review.

Chapter Contents. Each chapter begins with an illustration demonstrating a broad-range application of the material within the chapter. A bulleted list of the chapter contents is provided to give a general overview of the material that will be covered.

Emphasis on Free-Body Diagrams. Drawing a free-body diagram is particularly important when solving problems, and for this reason this step is strongly emphasized throughout the book. In particular, special sections and examples are devoted to show how to draw free-body diagrams. Specific homework problems have also been added to develop this practice.

Procedures for Analysis. A general procedure for analyzing any mechanical problem is presented at the end of the first chapter. Then this procedure is customized to relate to specific types of problems that are covered throughout the book. This unique feature provides the student with a logical and orderly method to follow when applying the theory. The example problems are solved using this outlined method in order to clarify its numerical application. Realize, however, that once the relevant principles have been mastered and enough confidence and judgment have been obtained, the student can then develop his or her own procedures for solving problems.

Important Points. This feature provides a review or summary of the most important concepts in a section and highlights the most significant points that should be realized when applying the theory to solve problems.

Fundamental Problems. These problem sets are selectively located just after most of the example problems. They provide students with simple applications of the concepts, and therefore, the chance to develop their problem-solving skills before attempting to solve any of the standard problems that follow. In addition, they can be used for preparing for exams, and they can be used at a later time when preparing for the Fundamentals in Engineering Exam.

Conceptual Understanding. Through the use of photographs placed throughout the book, theory is applied in a simplified way in order to illustrate some of its more important conceptual features and instill the physical meaning of many

of the terms used in the equations. These simplified applications increase interest in the subject matter and better prepare the student to understand the examples and solve problems.

Homework Problems. Apart from the Fundamental and Conceptual type problems mentioned previously, other types of problems contained in the book include the following:

- **Free-Body Diagram Problems.** Some sections of the book contain introductory problems that only require drawing the free-body diagram for the specific problems within a problem set. These assignments will impress upon the student the importance of mastering this skill as a requirement for a complete solution of any equilibrium problem.
- **General Analysis and Design Problems.** The majority of problems in the book depict realistic situations encountered in engineering practice. Some of these problems come from actual products used in industry. It is hoped that this realism will both stimulate the student's interest in engineering mechanics and provide a means for developing the skill to reduce any such problem from its physical description to a model or symbolic representation to which the principles of mechanics may be applied.

Throughout the book, there is an approximate balance of problems using either SI or FPS units. Furthermore, in any set, an attempt has been made to arrange the problems in order of increasing difficulty except for the end of chapter review problems, which are presented in random order.

- **Computer Problems.** An effort has been made to include some problems that may be solved using a numerical procedure executed on either a desktop computer or a programmable pocket calculator. The intent here is to broaden the student's capacity for using other forms of mathematical analysis without sacrificing the time needed to focus on the application of the principles of mechanics. Problems of this type, which either can or must be solved using numerical procedures, are identified by a "square" symbol (■) preceding the problem number.

The many homework problems in this edition, have been placed into two different categories. Problems that are simply indicated by a problem number have an answer and in some cases an additional numerical result given in the back of the book. An asterisk (*) before every fourth problem number indicates a problem without an answer.

Accuracy. As with the previous editions, apart from the author, the accuracy of the text and problem solutions has been thoroughly checked by four other parties: Scott Hendricks, Virginia Polytechnic Institute and State University; Karim Nohra, University of South Florida; Kurt Norlin, Bittner Development Group; and finally Kai Beng, a practicing engineer, who in addition to accuracy review provided suggestions for problem development.

Contents

Statics

The book is divided into 11 chapters, in which the principles are first applied to simple, then to more complicated situations. In a general sense, each principle is applied first to a particle, then a rigid body subjected to a coplanar system of forces, and finally to three-dimensional force systems acting on a rigid body.

Chapter 1 begins with an introduction to mechanics and a discussion of units. The vector properties of a concurrent force system are introduced in Chapter 2. This theory is then applied to the equilibrium of a particle in Chapter 3. Chapter 4 contains a general discussion of both concentrated and distributed force systems and the methods used to simplify them. The principles of rigid-body equilibrium are developed in Chapter 5 and then applied to specific problems involving the equilibrium of trusses, frames, and machines in Chapter 6, and to the analysis of internal forces in beams and cables in Chapter 7. Applications to problems involving frictional forces are discussed in Chapter 8, and topics related to the center of gravity and centroid are treated in Chapter 9. If time permits, sections involving more advanced topics, indicated by stars (\star), may be covered. Most of these topics are included in Chapter 10 (area and mass moments of inertia) and Chapter 11 (virtual work and potential energy). Note that this material also provides a suitable reference for basic principles when it is discussed in more advanced courses. Finally, Appendix A provides a review and list of mathematical formulas needed to solve the problems in the book.

Alternative Coverage. At the discretion of the instructor, some of the material may be presented in a different sequence with no loss of continuity. For example, it is possible to introduce the concept of a force and all the necessary methods of vector analysis by first covering Chapter 2 and Section 4.2 (the cross product). Then after covering the rest of Chapter 4 (force and moment systems), the equilibrium methods of Chapters 3 and 5 can be discussed.

Dynamics

The book is divided into 11 chapters, in which the principles are first applied to simple, then to more complicated situations.

The kinematics of a particle is discussed in Chapter 12, followed by a discussion of particle kinetics in Chapter 13 (Equation of Motion), Chapter 14 (Work and Energy), and Chapter 15 (Impulse and Momentum). The concepts of particle dynamics contained in these four chapters are then summarized in a “review” section, and the student is given the chance to identify and solve a variety of problems. A similar sequence of presentation is given for the planar motion of a rigid body: Chapter 16 (Planar Kinematics), Chapter 17 (Equations of Motion), Chapter 18 (Work and Energy), and Chapter 19 (Impulse and Momentum), followed by a summary and review set of problems for these chapters.

If time permits, some of the material involving three-dimensional rigid-body motion may be included in the course. The kinematics and kinetics of this motion are discussed in Chapters 20 and 21, respectively. Chapter 22 (Vibrations) may

be included if the student has the necessary mathematical background. Sections of the book that are considered to be beyond the scope of the basic dynamics course are indicated by a star (\star) and may be omitted. Note that this material also provides a suitable reference for basic principles when it is discussed in more advanced courses. Finally, Appendix A provides a list of mathematical formulas needed to solve the problems in the book, Appendix B provides a brief review of vector analysis, and Appendix C reviews application of the chain rule.

Alternative Coverage. At the discretion of the instructor, it is possible to cover Chapters 12 through 19 in the following order with no loss in continuity: Chapters 12 and 16 (Kinematics), Chapters 13 and 17 (Equations of Motion), Chapter 14 and 18 (Work and Energy), and Chapters 15 and 19 (Impulse and Momentum).

Acknowledgments

The author has endeavored to write this book so that it will appeal to both the student and instructor. Through the years, many people have helped in its development, and I will always be grateful for their valued suggestions and comments. Specifically, I wish to thank all the individuals who have contributed their comments relative to preparing the fourteenth edition of this work, and in particular, R. Bankhead of Highline Community College, K. Cook-Chennault of Rutgers, the State University of New Jersey, E. Erisman, College of Lake County Illinois, M. Freeman of the University of Alabama, A. Itani of the University of Nevada, Y. Laio of Arizona State University, H. Lu of University of Texas at Dallas, T. Miller of Oregon State University, J. Morgan of Texas A & M University, R. Neptune of the University of Texas, I. Orabi of the University of New Haven, M. Reynolds of the University of Arkansas, N. Schulz of the University of Portland, C. Sulzbach of the Colorado School of Mines, T. Tan, University of Memphis, R. Viesca of Tufts University, G. Young, Oklahoma State University, and P. Ziehl of the University of South Carolina.

There are a few other people that I also feel deserve particular recognition. These include comments sent to me by J. Dix, H. Kuhlman, S. Larwood, D. Pollock, and H. Wenzel. A long-time friend and associate, Kai Beng Yap, was of great help to me in preparing and checking problem solutions. A special note of thanks also goes to Kurt Norlin of Bittner Development Group in this regard. During the production process I am thankful for the assistance of Martha McMaster, my copy editor, and Rose Kernan, my production editor as well as my wife, Conny, who have helped prepare the manuscript for publication.


Lastly, many thanks are extended to all my students and to members of the teaching profession who have freely taken the time to e-mail me their suggestions and comments. Since this list is too long to mention, it is hoped that those who have given help in this manner will accept this anonymous recognition.

I would greatly appreciate hearing from you if at any time you have any comments, suggestions, or problems related to any matters regarding this edition.

*Russell Charles Hibbeler
hibbeler@bellsouth.net*

your work...

PART A

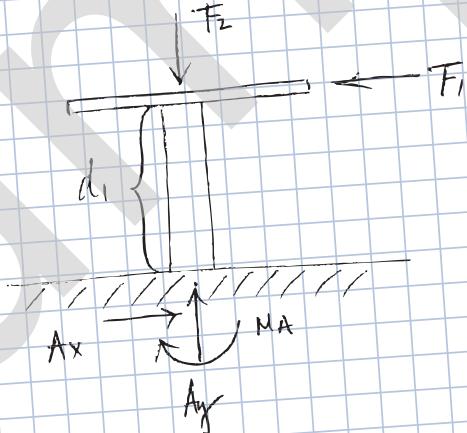

Given: $F_1 = 55.0 \text{ lb}$, $F_2 = 170 \text{ lb}$, $M_A = 160 \text{ lb} \cdot \text{ft}$

$$\sum M_A = 0 \Rightarrow (F_1 + F_2) \times d_1 - M_A = 0$$
$$(F_1 + F_2) \times d_1 = M_A$$

$$d_1 = \frac{M_A}{F_1 + F_2}$$

$$= \frac{160 \text{ lb} \cdot \text{ft}}{55.0 \text{ lb} + 170 \text{ lb}}$$

$$\boxed{d_1 = 0.711 \text{ ft}}$$

your answer **specific** feedback

Express your answer numerically in feet to three significant figures.

$d_1 =$ ft

Submit [Hints](#) [My Answers](#) [Give Up](#) [Review Part](#)

Incorrect; Try Again; 5 attempts remaining

The sum of the two forces do not contribute to the moment about point A. The magnitude is equal to the force multiplied by the perpendicular distance between point A and the line of action. What is the perpendicular distance between each force's line of action and point A?

Resources for Instructors

- **MasteringEngineering.** This online Tutorial Homework program allows you to integrate dynamic homework with automatic grading and adaptive tutoring. MasteringEngineering allows you to easily track the performance of your entire class on an assignment-by-assignment basis, or the detailed work of an individual student.
- **Instructor's Solutions Manual.** This supplement provides complete solutions supported by problem statements and problem figures. The fourteenth edition manual was revised to improve readability and was triple accuracy checked. The Instructor's Solutions Manual is available on Pearson Higher Education website: www.pearsonhighered.com.
- **Instructor's Resource.** Visual resources to accompany the text are located on the Pearson Higher Education website: www.pearsonhighered.com. If you are in need of a login and password for this site, please contact your local Pearson representative. Visual resources include all art from the text, available in PowerPoint slide and JPEG format.
- **Video Solutions.** Developed by Professor Edward Berger, Purdue University, video solutions are located in the study area of MasteringEngineering and offer step-by-step solution walkthroughs of representative homework problems from each section of the text. Make efficient use of class time and office hours by showing students the complete and concise problem-solving approaches that they can access any time and view at their own pace. The videos are designed to be a flexible resource to be used however each instructor and student prefers. A valuable tutorial resource, the videos are also helpful for student self-evaluation as students can pause the videos to check their understanding and work alongside the video. Access the videos at www.masteringengineering.com.

Resources for Students

- **MasteringEngineering.** Tutorial homework problems emulate the instructor's office-hour environment, guiding students through engineering concepts with self-paced individualized coaching. These in-depth tutorial homework problems are designed to coach students with feedback specific to their errors and optional hints that break problems down into simpler steps.
- **Statics Study Pack.** This supplement contains chapter-by-chapter study materials and a Free-Body Diagram Workbook.
- **Dynamics Study Pack.** This supplement contains chapter-by-chapter study materials and a Free-Body Diagram Workbook.
- **Video Solutions.** Complete, step-by-step solution walkthroughs of representative homework problems from each section. Videos offer fully worked solutions that show every step of representative homework problems—this helps students make vital connections between concepts.
- **Statics Practice Problems Workbook.** This workbook contains additional worked problems. The problems are partially solved and are designed to help guide students through difficult topics.
- **Dynamics Practice Problems Workbook.** This workbook contains additional worked problems. The problems are partially solved and are designed to help guide students through difficult topics.

Ordering Options

The *Statics and Dynamics Study Packs* and MasteringEngineering resources are available as stand-alone items for student purchase and are also available packaged with the texts. The ISBN for each valuepack is as follows:

- *Engineering Mechanics: Statics* with Study Pack: ISBN 0134136683
 - *Engineering Mechanics: Statics* Plus MasteringEngineering with Pearson eText—Access Card Package: ISBN: 0134160681
 - *Engineering Mechanics: Dynamics* with Study Pack: ISBN: 0134116658
 - *Engineering Mechanics: Dynamics* Plus MasteringEngineering with Pearson eText — Access Card Package: ISBN: 0134116992
-

Custom Solutions

Please contact your local Pearson Sales Representative for more details about custom options or visit

www.pearsonlearningsolutions.com, keyword: Hibbeler.

Sample

CONTENTS

1

General Principles 3

- Chapter Objectives 3
- 1.1 Mechanics 3
- 1.2 Fundamental Concepts 4
- 1.3 Units of Measurement 7
- 1.4 The International System of Units 9
- 1.5 Numerical Calculations 10
- 1.6 General Procedure for Analysis 12



2

Force Vectors 17



- Chapter Objectives 17
- 2.1 Scalars and Vectors 17
- 2.2 Vector Operations 18
- 2.3 Vector Addition of Forces 20
- 2.4 Addition of a System of Coplanar Forces 33
- 2.5 Cartesian Vectors 44
- 2.6 Addition of Cartesian Vectors 47
- 2.7 Position Vectors 56
- 2.8 Force Vector Directed Along a Line 59
- 2.9 Dot Product 69

3

Equilibrium of a Particle 87

- Chapter Objectives 87
- 3.1 Condition for the Equilibrium of a Particle 87
- 3.2 The Free-Body Diagram 88
- 3.3 Coplanar Force Systems 91
- 3.4 Three-Dimensional Force Systems 106



4

Force System Resultants 121



- Chapter Objectives 121
- 4.1 Moment of a Force—Scalar Formulation 121
- 4.2 Cross Product 125
- 4.3 Moment of a Force—Vector Formulation 128
- 4.4 Principle of Moments 132
- 4.5 Moment of a Force about a Specified Axis 145
- 4.6 Moment of a Couple 154
- 4.7 Simplification of a Force and Couple System 166
- 4.8 Further Simplification of a Force and Couple System 177
- 4.9 Reduction of a Simple Distributed Loading 190

5 Equilibrium of a Rigid Body 207



- Chapter Objectives 207
- 5.1** Conditions for Rigid-Body Equilibrium 207
- 5.2** Free-Body Diagrams 209
- 5.3** Equations of Equilibrium 220
- 5.4** Two- and Three-Force Members 230
- 5.5** Free-Body Diagrams 245
- 5.6** Equations of Equilibrium 250
- 5.7** Constraints and Statical Determinacy 251

6 Structural Analysis 273



- Chapter Objectives 273
- 6.1** Simple Trusses 273
- 6.2** The Method of Joints 276
- 6.3** Zero-Force Members 282
- 6.4** The Method of Sections 291
- 6.5** Space Trusses 301
- 6.6** Frames and Machines 305

7 Internal Forces 343



- Chapter Objectives 343
- 7.1** Internal Loadings Developed in Structural Members 343
- 7.2** Shear and Moment Equations and Diagrams 361
- 7.3** Relations between Distributed Load, Shear, and Moment 370
- 7.4** Cables 381

8 Friction 401



- Chapter Objectives 401
- 8.1** Characteristics of Dry Friction 401
- 8.2** Problems Involving Dry Friction 406
- 8.3** Wedges 430
- 8.4** Frictional Forces on Screws 432
- 8.5** Frictional Forces on Flat Belts 439
- 8.6** Frictional Forces on Collar Bearings, Pivot Bearings, and Disks 447
- 8.7** Frictional Forces on Journal Bearings 450
- 8.8** Rolling Resistance 452

9**Center of Gravity and Centroid** 465

- Chapter Objectives 465
- 9.1** Center of Gravity, Center of Mass, and the Centroid of a Body 465
- 9.2** Composite Bodies 488
- 9.3** Theorems of Pappus and Guldinus 502
- 9.4** Resultant of a General Distributed Loading 511
- 9.5** Fluid Pressure 512

10**Moments of Inertia** 529

- Chapter Objectives 529
- 10.1** Definition of Moments of Inertia for Areas 529
- 10.2** Parallel-Axis Theorem for an Area 530
- 10.3** Radius of Gyration of an Area 531
- 10.4** Moments of Inertia for Composite Areas 540
- 10.5** Product of Inertia for an Area 548
- 10.6** Moments of Inertia for an Area about Inclined Axes 552
- 10.7** Mohr's Circle for Moments of Inertia 555
- 10.8** Mass Moment of Inertia 563

11**Virtual Work** 581

- Chapter Objectives 581
- 11.1** Definition of Work 581
- 11.2** Principle of Virtual Work 583
- 11.3** Principle of Virtual Work for a System of Connected Rigid Bodies 585
- 11.4** Conservative Forces 597
- 11.5** Potential Energy 598
- 11.6** Potential-Energy Criterion for Equilibrium 600
- 11.7** Stability of Equilibrium Configuration 601

Appendix

- A. Mathematical Review and Expressions 616

**Fundamental Problems
Partial Solutions and
Answers** 620**Preliminary Problems
Statics Solutions** 638**Review Problem
Solutions** 648**Answers to Selected
Problems** 658**Index** 671

12 Kinematics of a Particle 3




- Chapter Objectives 3
- 12.1** Introduction 3
- 12.2** Rectilinear Kinematics: Continuous Motion 5
- 12.3** Rectilinear Kinematics: Erratic Motion 20
- 12.4** General Curvilinear Motion 34
- 12.5** Curvilinear Motion: Rectangular Components 36
- 12.6** Motion of a Projectile 41
- 12.7** Curvilinear Motion: Normal and Tangential Components 56
- 12.8** Curvilinear Motion: Cylindrical Components 71
- 12.9** Absolute Dependent Motion Analysis of Two Particles 85
- 12.10** Relative-Motion of Two Particles Using Translating Axes 91

13 Kinetics of a Particle: Force and Acceleration 113



- Chapter Objectives 113
- 13.1** Newton's Second Law of Motion 113
- 13.2** The Equation of Motion 116
- 13.3** Equation of Motion for a System of Particles 118
- 13.4** Equations of Motion: Rectangular Coordinates 120
- 13.5** Equations of Motion: Normal and Tangential Coordinates 138
- 13.6** Equations of Motion: Cylindrical Coordinates 152
- *13.7** Central-Force Motion and Space Mechanics 164

14 Kinetics of a Particle: Work and Energy 179



- Chapter Objectives 179
- 14.1** The Work of a Force 179
- 14.2** Principle of Work and Energy 184
- 14.3** Principle of Work and Energy for a System of Particles 186
- 14.4** Power and Efficiency 204
- 14.5** Conservative Forces and Potential Energy 213
- 14.6** Conservation of Energy 217

15 Kinetics of a Particle: Impulse and Momentum 237



- Chapter Objectives 237
- 15.1** Principle of Linear Impulse and Momentum 237
- 15.2** Principle of Linear Impulse and Momentum for a System of Particles 240
- 15.3** Conservation of Linear Momentum for a System of Particles 254
- 15.4** Impact 266
- 15.5** Angular Momentum 280
- 15.6** Relation Between Moment of a Force and Angular Momentum 281
- 15.7** Principle of Angular Impulse and Momentum 284
- 15.8** Steady Flow of a Fluid Stream 295
- *15.9** Propulsion with Variable Mass 300

16**Planar Kinematics of a Rigid Body** 319

- Chapter Objectives 319
16.1 Planar Rigid-Body Motion 319
16.2 Translation 321
16.3 Rotation about a Fixed Axis 322
16.4 Absolute Motion Analysis 338
16.5 Relative-Motion Analysis: Velocity 346
16.6 Instantaneous Center of Zero Velocity 360
16.7 Relative-Motion Analysis: Acceleration 373
16.8 Relative-Motion Analysis using Rotating Axes 389

17**Planar Kinetics of a Rigid Body: Force and Acceleration** 409

- Chapter Objectives 409
17.1 Mass Moment of Inertia 409
17.2 Planar Kinetic Equations of Motion 423
17.3 Equations of Motion: Translation 426
17.4 Equations of Motion: Rotation about a Fixed Axis 441
17.5 Equations of Motion: General Plane Motion 456

18**Planar Kinetics of a Rigid Body: Work and Energy** 473

- Chapter Objectives 473
18.1 Kinetic Energy 473
18.2 The Work of a Force 476
18.3 The Work of a Couple Moment 478
18.4 Principle of Work and Energy 480
18.5 Conservation of Energy 496

19**Planar Kinetics of a Rigid Body: Impulse and Momentum** 517

- Chapter Objectives 517
19.1 Linear and Angular Momentum 517
19.2 Principle of Impulse and Momentum 523
19.3 Conservation of Momentum 540
***19.4** Eccentric Impact 544

20**Three-Dimensional Kinematics of a Rigid Body** 561

- Chapter Objectives 561
- 20.1** Rotation About a Fixed Point 561
- *20.2** The Time Derivative of a Vector Measured from Either a Fixed or Translating-Rotating System 564
- 20.3** General Motion 569
- *20.4** Relative-Motion Analysis Using Translating and Rotating Axes 578

21**Three-Dimensional Kinetics of a Rigid Body** 591

- Chapter Objectives 591
- *21.1** Moments and Products of Inertia 591
- 21.2** Angular Momentum 601
- 21.3** Kinetic Energy 604
- *21.4** Equations of Motion 612
- *21.5** Gyroscopic Motion 626
- 21.6** Torque-Free Motion 632

22**Vibrations** 643

- Chapter Objectives 643
- *22.1** Undamped Free Vibration 643
- *22.2** Energy Methods 657
- *22.3** Undamped Forced Vibration 663
- *22.4** Viscous Damped Free Vibration 667
- *22.5** Viscous Damped Forced Vibration 670
- *22.6** Electrical Circuit Analogs 673

Appendix

- A. Mathematical Expressions 682
- B. Vector Analysis 684
- C. The Chain Rule 689

**Fundamental Problems
Partial Solutions and
Answers** 692**Preliminary Problems
Dynamics Solutions** 713**Review Problem
Solutions** 723**Answers to Selected
Problems** 733**Index** 745

CREDITS

Chapter opening images are credited as follows:

Chapter 1, Andrew Peacock/Lonely Planet Images/Getty Images

Chapter 2, Vasily Koval/Fotolia

Chapter 3, Igor Tumarkin/ITPS/Shutterstock

Chapter 4, Rolf Adlercreutz/Alamy

Chapter 5, YuryZap/Shutterstock

Chapter 6, Tim Scrivener/Alamy

Chapter 7, Tony Freeman/Science Source

Chapter 8, Pavel Polkovnikov/Shutterstock

Chapter 9, Heather Reeder/Shutterstock

Chapter 10, Michael N. Paras/AGE Fotostock/Alamy

Chapter 11, John Kershaw/Alamy

Chapter 12, Lars Johansson/Fotolia

Chapter 13, Migel/Shutterstock

Chapter 14, Oliver Furrer/Ocean/Corbis

Chapter 15, David J. Green/Alamy

Chapter 16, TFoxFoto/Shutterstock

Chapter 17, Surasaki/Fotolia

Chapter 18, Arinahabich/Fotolia

Chapter 19, Hellen Sergeyeva/Fotolia

Chapter 20, Philippe Psaila/Science Source

Chapter 21, Derek Watt/Alamy

Chapter 22, Daseaford/Fotolia

Sample

ENGINEERING MECHANICS

STATICS

FOURTEENTH EDITION

Chapter 1



(© Andrew Peacock/Lonely Planet Images/Getty Images)

Large cranes such as this one are required to lift extremely large loads. Their design is based on the basic principles of statics and dynamics, which form the subject matter of engineering mechanics.

General Principles

CHAPTER OBJECTIVES

- To provide an introduction to the basic quantities and idealizations of mechanics.
- To give a statement of Newton's Laws of Motion and Gravitation.
- To review the principles for applying the SI system of units.
- To examine the standard procedures for performing numerical calculations.
- To present a general guide for solving problems.

1.1 Mechanics

Mechanics is a branch of the physical sciences that is concerned with the state of rest or motion of bodies that are subjected to the action of forces. In general, this subject can be subdivided into three branches: *rigid-body mechanics*, *deformable-body mechanics*, and *fluid mechanics*. In this book we will study rigid-body mechanics since it is a basic requirement for the study of the mechanics of deformable bodies and the mechanics of fluids. Furthermore, rigid-body mechanics is essential for the design and analysis of many types of structural members, mechanical components, or electrical devices encountered in engineering.

Rigid-body mechanics is divided into two areas: statics and dynamics. **Statics** deals with the equilibrium of bodies, that is, those that are either at rest or move with a constant velocity; whereas **dynamics** is concerned with the accelerated motion of bodies. We can consider statics as a special case of dynamics, in which the acceleration is zero; however, statics deserves separate treatment in engineering education since many objects are designed with the intention that they remain in equilibrium.

Historical Development. The subject of statics developed very early in history because its principles can be formulated simply from measurements of geometry and force. For example, the writings of Archimedes (287–212 B.C.) deal with the principle of the lever. Studies of the pulley, inclined plane, and wrench are also recorded in ancient writings—at times when the requirements for engineering were limited primarily to building construction.

Since the principles of dynamics depend on an accurate measurement of time, this subject developed much later. Galileo Galilei (1564–1642) was one of the first major contributors to this field. His work consisted of experiments using pendulums and falling bodies. The most significant contributions in dynamics, however, were made by Isaac Newton (1642–1727), who is noted for his formulation of the three fundamental laws of motion and the law of universal gravitational attraction. Shortly after these laws were postulated, important techniques for their application were developed by other scientists and engineers, some of whom will be mentioned throughout the text.

1.2 Fundamental Concepts

Before we begin our study of engineering mechanics, it is important to understand the meaning of certain fundamental concepts and principles.

Basic Quantities. The following four quantities are used throughout mechanics.

Length. *Length* is used to locate the position of a point in space and thereby describe the size of a physical system. Once a standard unit of length is defined, one can then use it to define distances and geometric properties of a body as multiples of this unit.

Time. *Time* is conceived as a succession of events. Although the principles of statics are time independent, this quantity plays an important role in the study of dynamics.

Mass. *Mass* is a measure of a quantity of matter that is used to compare the action of one body with that of another. This property manifests itself as a gravitational attraction between two bodies and provides a measure of the resistance of matter to a change in velocity.

Force. In general, *force* is considered as a “push” or “pull” exerted by one body on another. This interaction can occur when there is direct contact between the bodies, such as a person pushing on a wall, or it can occur through a distance when the bodies are physically separated. Examples of the latter type include gravitational, electrical, and magnetic forces. In any case, a force is completely characterized by its magnitude, direction, and point of application.

Idealizations. Models or idealizations are used in mechanics in order to simplify application of the theory. Here we will consider three important idealizations.


Particle. A *particle* has a mass, but a size that can be neglected. For example, the size of the earth is insignificant compared to the size of its orbit, and therefore the earth can be modeled as a particle when studying its orbital motion. When a body is idealized as a particle, the principles of mechanics reduce to a rather simplified form since the geometry of the body *will not be involved* in the analysis of the problem.



Three forces act on the ring. Since these forces all meet at a point, then for any force analysis, we can assume the ring to be represented as a particle. (© Russell C. Hibbeler)

Rigid Body. A *rigid body* can be considered as a combination of a large number of particles in which all the particles remain at a fixed distance from one another, both before and after applying a load. This model is important because the body's shape does not change when a load is applied, and so we do not have to consider the type of material from which the body is made. In most cases the actual deformations occurring in structures, machines, mechanisms, and the like are relatively small, and the rigid-body assumption is suitable for analysis.


Concentrated Force. A *concentrated force* represents the effect of a loading which is assumed to act at a point on a body. We can represent a load by a concentrated force, provided the area over which the load is applied is very small compared to the overall size of the body. An example would be the contact force between a wheel and the ground.

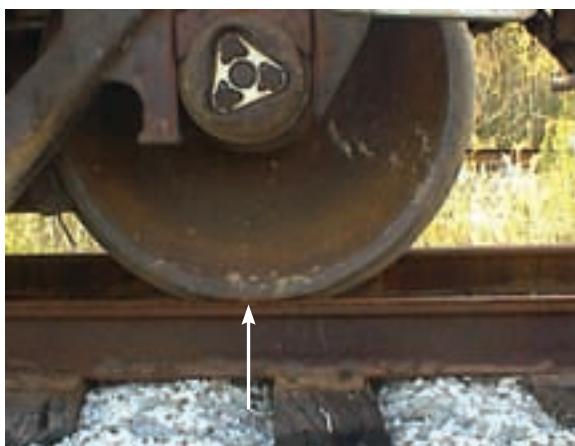

Steel is a common engineering material that does not deform very much under load. Therefore, we can consider this railroad wheel to be a rigid body acted upon by the concentrated force of the rail. (© Russell C. Hibbeler)


Newton's Three Laws of Motion. Engineering mechanics is formulated on the basis of Newton's three laws of motion, the validity of which is based on experimental observation. These laws apply to the motion of a particle as measured from a *nonaccelerating* reference frame. They may be briefly stated as follows.

First Law. A particle originally at rest, or moving in a straight line with constant velocity, tends to remain in this state provided the particle is *not* subjected to an unbalanced force, Fig. 1–1a.



Second Law. A particle acted upon by an *unbalanced force* **F** experiences an acceleration **a** that has the same direction as the force and a magnitude that is directly proportional to the force, Fig. 1–1b.* If **F** is applied to a particle of mass *m*, this law may be expressed mathematically as

$$\mathbf{F} = m\mathbf{a} \quad (1-1)$$

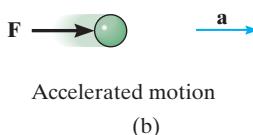

Third Law. The mutual forces of action and reaction between two particles are equal, opposite, and collinear, Fig. 1–1c.

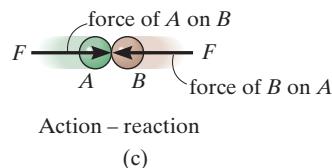


Fig. 1–1

*Stated another way, the unbalanced force acting on the particle is proportional to the time rate of change of the particle's linear momentum.

Newton's Law of Gravitational Attraction. Shortly after formulating his three laws of motion, Newton postulated a law governing the gravitational attraction between any two particles. Stated mathematically,

$$F = G \frac{m_1 m_2}{r^2} \quad (1-2)$$

where

F = force of gravitation between the two particles

G = universal constant of gravitation; according to experimental evidence, $G = 66.73(10^{-12}) \text{ m}^3/(\text{kg} \cdot \text{s}^2)$

m_1, m_2 = mass of each of the two particles

r = distance between the two particles

Weight. According to Eq. 1-2, any two particles or bodies have a mutual attractive (gravitational) force acting between them. In the case of a particle located at or near the surface of the earth, however, the only gravitational force having any sizable magnitude is that between the earth and the particle. Consequently, this force, termed the **weight**, will be the only gravitational force considered in our study of mechanics.

From Eq. 1-2, we can develop an approximate expression for finding the weight W of a particle having a mass $m_1 = m$. If we assume the earth to be a nonrotating sphere of constant density and having a mass $m_2 = M_e$, then if r is the distance between the earth's center and the particle, we have

$$W = G \frac{m M_e}{r^2}$$

Letting $g = GM_e/r^2$ yields

$$W = mg \quad (1-3)$$


By comparison with $\mathbf{F} = m\mathbf{a}$, we can see that g is the acceleration due to gravity. Since it depends on r , then the weight of a body is *not* an absolute quantity. Instead, its magnitude is determined from where the measurement was made. For most engineering calculations, however, g is determined at sea level and at a latitude of 45° , which is considered the "standard location."




The astronaut's weight is diminished since she is far removed from the gravitational field of the earth. (© NikoNomad/Shutterstock)

1.3 Units of Measurement

The four basic quantities—length, time, mass, and force—are not all independent from one another; in fact, they are *related* by Newton's second law of motion, $\mathbf{F} = m\mathbf{a}$. Because of this, the *units* used to measure these quantities cannot *all* be selected arbitrarily. The equality $\mathbf{F} = m\mathbf{a}$ is maintained only if three of the four units, called **base units**, are *defined* and the fourth unit is then *derived* from the equation.



(a)

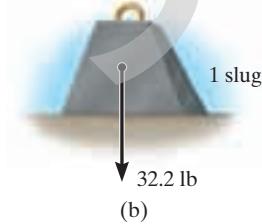**Fig. 1-2**

SI Units. The International System of units, abbreviated SI after the French “Système International d’Unités,” is a modern version of the metric system which has received worldwide recognition. As shown in Table 1–1, the SI system defines length in meters (m), time in seconds (s), and mass in kilograms (kg). The unit of force, called a **newton** (N), is derived from $\mathbf{F} = m\mathbf{a}$. Thus, 1 newton is equal to a force required to give 1 kilogram of mass an acceleration of 1 m/s^2 ($N = \text{kg} \cdot \text{m/s}^2$).

If the weight of a body located at the “standard location” is to be determined in newtons, then Eq. 1–3 must be applied. Here measurements give $g = 9.80665 \text{ m/s}^2$; however, for calculations, the value $g = 9.81 \text{ m/s}^2$ will be used. Thus,

$$W = mg \quad (g = 9.81 \text{ m/s}^2) \quad (1-4)$$

Therefore, a body of mass 1 kg has a weight of 9.81 N, a 2-kg body weighs 19.62 N, and so on, Fig. 1–2a.

U.S. Customary. In the U.S. Customary system of units (FPS) length is measured in feet (ft), time in seconds (s), and force in pounds (lb), Table 1–1. The unit of mass, called a **slug**, is derived from $\mathbf{F} = m\mathbf{a}$. Hence, 1 slug is equal to the amount of matter accelerated at 1 ft/s^2 when acted upon by a force of 1 lb (slug = $\text{lb} \cdot \text{s}^2/\text{ft}$).

Therefore, if the measurements are made at the “standard location,” where $g = 32.2 \text{ ft/s}^2$, then from Eq. 1–3,

$$m = \frac{W}{g} \quad (g = 32.2 \text{ ft/s}^2) \quad (1-5)$$

And so a body weighing 32.2 lb has a mass of 1 slug, a 64.4-lb body has a mass of 2 slugs, and so on, Fig. 1–2b.

TABLE 1–1 Systems of Units

Name	Length	Time	Mass	Force
International System of Units SI	meter m	second s	kilogram kg	newton* $\left(\frac{\text{N}}{\text{kg} \cdot \text{m}}\right)$
U.S. Customary FPS	foot ft	second s	slug* $\left(\frac{\text{lb} \cdot \text{s}^2}{\text{ft}}\right)$	pound lb

*Derived unit.

Conversion of Units. Table 1–2 provides a set of direct conversion factors between FPS and SI units for the basic quantities. Also, in the FPS system, recall that 1 ft = 12 in. (inches), 5280 ft = 1 mi (mile), 1000 lb = 1 kip (kilo-pound), and 2000 lb = 1 ton.

TABLE 1–2 Conversion Factors

Quantity	Unit of Measurement (FPS)	Equals	Unit of Measurement (SI)
Force	lb		4.448 N
Mass	slug		14.59 kg
Length	ft		0.3048 m

1.4 The International System of Units

The SI system of units is used extensively in this book since it is intended to become the worldwide standard for measurement. Therefore, we will now present some of the rules for its use and some of its terminology relevant to engineering mechanics.

Prefixes. When a numerical quantity is either very large or very small, the units used to define its size may be modified by using a prefix. Some of the prefixes used in the SI system are shown in Table 1–3. Each represents a multiple or submultiple of a unit which, if applied successively, moves the decimal point of a numerical quantity to every third place.* For example, $4\ 000\ 000\text{ N} = 4\ 000\text{ kN}$ (kilo-newton) = 4 MN (mega-newton), or $0.005\text{ m} = 5\text{ mm}$ (milli-meter). Notice that the SI system does not include the multiple deca (10) or the submultiple centi (0.01), which form part of the metric system. Except for some volume and area measurements, the use of these prefixes is to be avoided in science and engineering.

TABLE 1–3 Prefixes

	Exponential Form	Prefix	SI Symbol
<i>Multiples</i>			
1 000 000 000	10^9	giga	G
1 000 000	10^6	mega	M
1 000	10^3	kilo	k
<i>Submultiples</i>			
0.001	10^{-3}	milli	m
0.000 001	10^{-6}	micro	μ
0.000 000 001	10^{-9}	nano	n

*The kilogram is the only base unit that is defined with a prefix.

Rules for Use. Here are a few of the important rules that describe the proper use of the various SI symbols:

- Quantities defined by several units which are multiples of one another are separated by a *dot* to avoid confusion with prefix notation, as indicated by $N = \text{kg} \cdot \text{m}/\text{s}^2 = \text{kg} \cdot \text{m} \cdot \text{s}^{-2}$. Also, $\text{m} \cdot \text{s}$ (meter-second), whereas ms (milli-second).
- The exponential power on a unit having a prefix refers to both the unit *and* its prefix. For example, $\mu\text{N}^2 = (\mu\text{N})^2 = \mu\text{N} \cdot \mu\text{N}$. Likewise, mm^2 represents $(\text{mm})^2 = \text{mm} \cdot \text{mm}$.
- With the exception of the base unit the kilogram, in general avoid the use of a prefix in the denominator of composite units. For example, do not write N/mm , but rather kN/m ; also, m/mg should be written as Mm/kg .
- When performing calculations, represent the numbers in terms of their *base or derived units* by converting all prefixes to powers of 10. The final result should then be expressed using a *single prefix*. Also, after calculation, it is best to keep numerical values between 0.1 and 1000; otherwise, a suitable prefix should be chosen. For example,

$$(50 \text{ kN})(60 \text{ nm}) = [50(10^3) \text{ N}] [60(10^{-9}) \text{ m}] \\ = 3000(10^{-6}) \text{ N} \cdot \text{m} = 3(10^{-3}) \text{ N} \cdot \text{m} = 3 \text{ mN} \cdot \text{m}$$

1.5 Numerical Calculations



Computers are often used in engineering for advanced design and analysis. (© Blaize Pascall/Alamy)

Numerical work in engineering practice is most often performed by using handheld calculators and computers. It is important, however, that the answers to any problem be reported with justifiable accuracy using appropriate significant figures. In this section we will discuss these topics together with some other important aspects involved in all engineering calculations.

Dimensional Homogeneity. The terms of any equation used to describe a physical process must be *dimensionally homogeneous*; that is, each term must be expressed in the same units. Provided this is the case, all the terms of an equation can then be combined if numerical values are substituted for the variables. Consider, for example, the equation $s = vt + \frac{1}{2}at^2$, where, in SI units, s is the position in meters, m , t is time in seconds, s , v is velocity in m/s and a is acceleration in m/s^2 . Regardless of how this equation is evaluated, it maintains its dimensional homogeneity. In the form stated, each of the three terms is expressed in meters [m , $(\text{m}/\text{s})\text{s}$, $(\text{m}/\text{s}^2)\text{s}^2$] or solving for a , $a = 2s/t^2 - 2v/t$, the terms are each expressed in units of m/s^2 [m/s^2 , m/s^2 , $(\text{m}/\text{s})/\text{s}$].

Keep in mind that problems in mechanics always involve the solution of dimensionally homogeneous equations, and so this fact can then be used as a partial check for algebraic manipulations of an equation.

Significant Figures. The number of significant figures contained in any number determines the accuracy of the number. For instance, the number 4981 contains four significant figures. However, if zeros occur at the end of a whole number, it may be unclear as to how many significant figures the number represents. For example, 23 400 might have three (234), four (2340), or five (23 400) significant figures. To avoid these ambiguities, we will use *engineering notation* to report a result. This requires that numbers be rounded off to the appropriate number of significant digits and then expressed in multiples of (10^3) , such as (10^3) , (10^6) , or (10^{-9}) . For instance, if 23 400 has five significant figures, it is written as $23.400(10^3)$, but if it has only three significant figures, it is written as $23.4(10^3)$.

If zeros occur at the beginning of a number that is less than one, then the zeros are not significant. For example, 0.008 21 has three significant figures. Using engineering notation, this number is expressed as $8.21(10^{-3})$. Likewise, 0.000 582 can be expressed as $0.582(10^{-6})$ or $582(10^{-6})$.

Rounding Off Numbers. Rounding off a number is necessary so that the accuracy of the result will be the same as that of the problem data. As a general rule, any numerical figure ending in a number greater than five is rounded up and a number less than five is not rounded up. The rules for rounding off numbers are best illustrated by examples. Suppose the number 3.5587 is to be rounded off to *three* significant figures. Because the fourth digit (8) is *greater than* 5, the third number is rounded up to 3.56. Likewise 0.5896 becomes 0.590 and 9.3866 becomes 9.39. If we round off 1.341 to three significant figures, because the fourth digit (1) is *less than* 5, then we get 1.34. Likewise 0.3762 becomes 0.376 and 9.871 becomes 9.87. There is a special case for any number that ends in a 5. As a general rule, if the digit preceding the 5 is an *even number*, then this digit is *not* rounded up. If the digit preceding the 5 is an *odd number*, then it is rounded up. For example, 75.25 rounded off to three significant digits becomes 75.2, 0.1275 becomes 0.128, and 0.2555 becomes 0.256.

Calculations. When a sequence of calculations is performed, it is best to store the intermediate results in the calculator. In other words, do not round off calculations until expressing the final result. This procedure maintains precision throughout the series of steps to the final solution. In this text we will generally round off the answers to three significant figures since most of the data in engineering mechanics, such as geometry and loads, may be reliably measured to this accuracy.



When solving problems, do the work as neatly as possible. Being neat will stimulate clear and orderly thinking, and vice versa. (© Russell C. Hibbeler)

1.6 General Procedure for Analysis

Attending a lecture, reading this book, and studying the example problems helps, but **the most effective way of learning the principles of engineering mechanics is to solve problems**. To be successful at this, it is important to always present the work in a *logical* and *orderly manner*, as suggested by the following sequence of steps:

- Read the problem carefully and try to correlate the actual physical situation with the theory studied.
- Tabulate the problem data and *draw to a large scale* any necessary diagrams.
- Apply the relevant principles, generally in mathematical form. When writing any equations, be sure they are dimensionally homogeneous.
- Solve the necessary equations, and report the answer with no more than three significant figures.
- Study the answer with technical judgment and common sense to determine whether or not it seems reasonable.

Important Points

- Statics is the study of bodies that are at rest or move with constant velocity.
- A particle has a mass but a size that can be neglected, and a rigid body does not deform under load.
- A force is considered as a “push” or “pull” of one body on another.
- Concentrated forces are assumed to act at a point on a body.
- Newton’s three laws of motion should be memorized.
- Mass is measure of a quantity of matter that does not change from one location to another. Weight refers to the gravitational attraction of the earth on a body or quantity of mass. Its magnitude depends upon the elevation at which the mass is located.
- In the SI system the unit of force, the newton, is a derived unit. The meter, second, and kilogram are base units.
- Prefixes G, M, k, m, μ , and n are used to represent large and small numerical quantities. Their exponential size should be known, along with the rules for using the SI units.
- Perform numerical calculations with several significant figures, and then report the final answer to three significant figures.
- Algebraic manipulations of an equation can be checked in part by verifying that the equation remains dimensionally homogeneous.
- Know the rules for rounding off numbers.

EXAMPLE | 1.1

Convert 2 km/h to m/s. How many ft/s is this?

SOLUTION

Since 1 km = 1000 m and 1 h = 3600 s, the factors of conversion are arranged in the following order, so that a cancellation of the units can be applied:

$$\begin{aligned} 2 \text{ km/h} &= \frac{2 \text{ km}}{\text{h}} \left(\frac{1000 \text{ m}}{\text{km}} \right) \left(\frac{1 \text{ h}}{3600 \text{ s}} \right) \\ &= \frac{2000 \text{ m}}{3600 \text{ s}} = 0.556 \text{ m/s} \end{aligned} \quad \text{Ans.}$$

From Table 1–2, 1 ft = 0.3048 m. Thus,

$$\begin{aligned} 0.556 \text{ m/s} &= \left(\frac{0.556 \text{ m}}{\text{s}} \right) \left(\frac{1 \text{ ft}}{0.3048 \text{ m}} \right) \\ &= 1.82 \text{ ft/s} \end{aligned} \quad \text{Ans.}$$

NOTE: Remember to round off the final answer to three significant figures.

EXAMPLE | 1.2

Convert the quantities 300 lb · s and 52 slug/ft³ to appropriate SI units.

SOLUTION

Using Table 1–2, 1 lb = 4.448 N.

$$\begin{aligned} 300 \text{ lb} \cdot \text{s} &= 300 \text{ lb} \cdot \text{s} \left(\frac{4.448 \text{ N}}{1 \text{ lb}} \right) \\ &= 1334.5 \text{ N} \cdot \text{s} = 1.33 \text{ kN} \cdot \text{s} \end{aligned} \quad \text{Ans.}$$

Since 1 slug = 14.59 kg and 1 ft = 0.3048 m, then

$$\begin{aligned} 52 \text{ slug/ft}^3 &= \frac{52 \text{ slug}}{\text{ft}^3} \left(\frac{14.59 \text{ kg}}{1 \text{ slug}} \right) \left(\frac{1 \text{ ft}}{0.3048 \text{ m}} \right)^3 \\ &= 26.8(10^3) \text{ kg/m}^3 \\ &= 26.8 \text{ Mg/m}^3 \end{aligned} \quad \text{Ans.}$$

EXAMPLE | 1.3

Evaluate each of the following and express with SI units having an appropriate prefix: (a) $(50 \text{ mN})(6 \text{ GN})$, (b) $(400 \text{ mm})(0.6 \text{ MN})^2$, (c) $45 \text{ MN}^3/900 \text{ Gg}$.

SOLUTION

First convert each number to base units, perform the indicated operations, then choose an appropriate prefix.

Part (a)

$$\begin{aligned}(50 \text{ mN})(6 \text{ GN}) &= [50(10^{-3}) \text{ N}] [6(10^9) \text{ N}] \\&= 300(10^6) \text{ N}^2 \\&= 300(10^6) \text{ N}^2 \left(\frac{1 \text{ kN}}{10^3 \text{ N}}\right) \left(\frac{1 \text{ kN}}{10^3 \text{ N}}\right) \\&= 300 \text{ kN}^2\end{aligned}\quad \textit{Ans.}$$

NOTE: Keep in mind the convention $\text{kN}^2 = (\text{kN})^2 = 10^6 \text{ N}^2$.

Part (b)

$$\begin{aligned}(400 \text{ mm})(0.6 \text{ MN})^2 &= [400(10^{-3}) \text{ m}] [0.6(10^6) \text{ N}]^2 \\&= [400(10^{-3}) \text{ m}] [0.36(10^{12}) \text{ N}^2] \\&= 144(10^9) \text{ m} \cdot \text{N}^2 \\&= 144 \text{ Gm} \cdot \text{N}^2\end{aligned}\quad \textit{Ans.}$$

We can also write

$$\begin{aligned}144(10^9) \text{ m} \cdot \text{N}^2 &= 144(10^9) \text{ m} \cdot \text{N}^2 \left(\frac{1 \text{ MN}}{10^6 \text{ N}}\right) \left(\frac{1 \text{ MN}}{10^6 \text{ N}}\right) \\&= 0.144 \text{ m} \cdot \text{MN}^2\end{aligned}\quad \textit{Ans.}$$

Part (c)

$$\begin{aligned}\frac{45 \text{ MN}^3}{900 \text{ Gg}} &= \frac{45(10^6 \text{ N})^3}{900(10^6) \text{ kg}} \\&= 50(10^9) \text{ N}^3/\text{kg} \\&= 50(10^9) \text{ N}^3 \left(\frac{1 \text{ kN}}{10^3 \text{ N}}\right)^3 \frac{1}{\text{kg}} \\&= 50 \text{ kN}^3/\text{kg}\end{aligned}\quad \textit{Ans.}$$

PROBLEMS

The answers to all but every fourth problem (asterisk) are given in the back of the book.

1–1. What is the weight in newtons of an object that has a mass of (a) 8 kg, (b) 0.04 kg, and (c) 760 Mg?

1–2. Represent each of the following combinations of units in the correct SI form: (a) $\text{kN}/\mu\text{s}$, (b) Mg/mN , and (c) $\text{MN}/(\text{kg} \cdot \text{ms})$.

1–3. Represent each of the following combinations of units in the correct SI form: (a) Mg/ms , (b) N/mm , (c) $\text{mN}/(\text{kg} \cdot \mu\text{s})$.

***1–4.** Convert: (a) $200 \text{ lb} \cdot \text{ft}$ to $\text{N} \cdot \text{m}$, (b) $350 \text{ lb}/\text{ft}^3$ to kN/m^3 , (c) $8 \text{ ft}/\text{h}$ to mm/s . Express the result to three significant figures. Use an appropriate prefix.

1–5. Represent each of the following as a number between 0.1 and 1000 using an appropriate prefix: (a) 45320 kN, (b) $568(10^5) \text{ mm}$, and (c) 0.00563 mg.

1–6. Round off the following numbers to three significant figures: (a) 58 342 m, (b) 68.534 s, (c) 2553 N, and (d) 7555 kg.

1–7. Represent each of the following quantities in the correct SI form using an appropriate prefix: (a) 0.000 431 kg, (b) $35.3(10^3) \text{ N}$, (c) 0.005 32 km.

***1–8.** Represent each of the following combinations of units in the correct SI form using an appropriate prefix: (a) Mg/mm , (b) $\text{mN}/\mu\text{s}$, (c) $\mu\text{m} \cdot \text{Mg}$.

1–9. Represent each of the following combinations of units in the correct SI form using an appropriate prefix: (a) m/ms , (b) μkm , (c) ks/mg , and (d) $\text{km} \cdot \mu\text{N}$.

1–10. Represent each of the following combinations of units in the correct SI form: (a) $\text{GN} \cdot \mu\text{m}$, (b) $\text{kg}/\mu\text{m}$, (c) N/ks^2 , and (d) $\text{kN}/\mu\text{s}$.

1–11. Represent each of the following with SI units having an appropriate prefix: (a) 8653 ms, (b) 8368 N, (c) 0.893 kg.

***1–12.** Evaluate each of the following to three significant figures and express each answer in SI units using an appropriate prefix: (a) $(684 \mu\text{m})/(43 \text{ ms})$, (b) $(28 \text{ ms})(0.0458 \text{ Mm})/(348 \text{ mg})$, (c) $(2.68 \text{ mm})(426 \text{ Mg})$.

1–13. The density (mass/volume) of aluminum is $5.26 \text{ slug}/\text{ft}^3$. Determine its density in SI units. Use an appropriate prefix.

1–14. Evaluate each of the following to three significant figures and express each answer in SI units using an appropriate prefix: (a) $(212 \text{ mN})^2$, (b) $(52 800 \text{ ms})^2$, and (c) $[548(10^6)]^{1/2} \text{ ms}$.

1–15. Using the SI system of units, show that Eq. 1–2 is a dimensionally homogeneous equation which gives F in newtons. Determine to three significant figures the gravitational force acting between two spheres that are touching each other. The mass of each sphere is 200 kg and the radius is 300 mm.

***1–16.** The pascal (Pa) is actually a very small unit of pressure. To show this, convert $1 \text{ Pa} = 1 \text{ N}/\text{m}^2$ to lb/ft^2 . Atmosphere pressure at sea level is $14.7 \text{ lb}/\text{in}^2$. How many pascals is this?

1–17. Water has a density of $1.94 \text{ slug}/\text{ft}^3$. What is the density expressed in SI units? Express the answer to three significant figures.


1–18. Evaluate each of the following to three significant figures and express each answer in SI units using an appropriate prefix: (a) $354 \text{ mg}(45 \text{ km})/(0.0356 \text{ kN})$, (b) $(0.004 53 \text{ Mg})(201 \text{ ms})$, (c) $435 \text{ MN}/23.2 \text{ mm}$.

1–19. A concrete column has a diameter of 350 mm and a length of 2 m. If the density (mass/volume) of concrete is $2.45 \text{ Mg}/\text{m}^3$, determine the weight of the column in pounds.

***1–20.** If a man weighs 155 lb on earth, specify (a) his mass in slugs, (b) his mass in kilograms, and (c) his weight in newtons. If the man is on the moon, where the acceleration due to gravity is $g_m = 5.30 \text{ ft}/\text{s}^2$, determine (d) his weight in pounds, and (e) his mass in kilograms.

1–21. Two particles have a mass of 8 kg and 12 kg, respectively. If they are 800 mm apart, determine the force of gravity acting between them. Compare this result with the weight of each particle.

Chapter 2

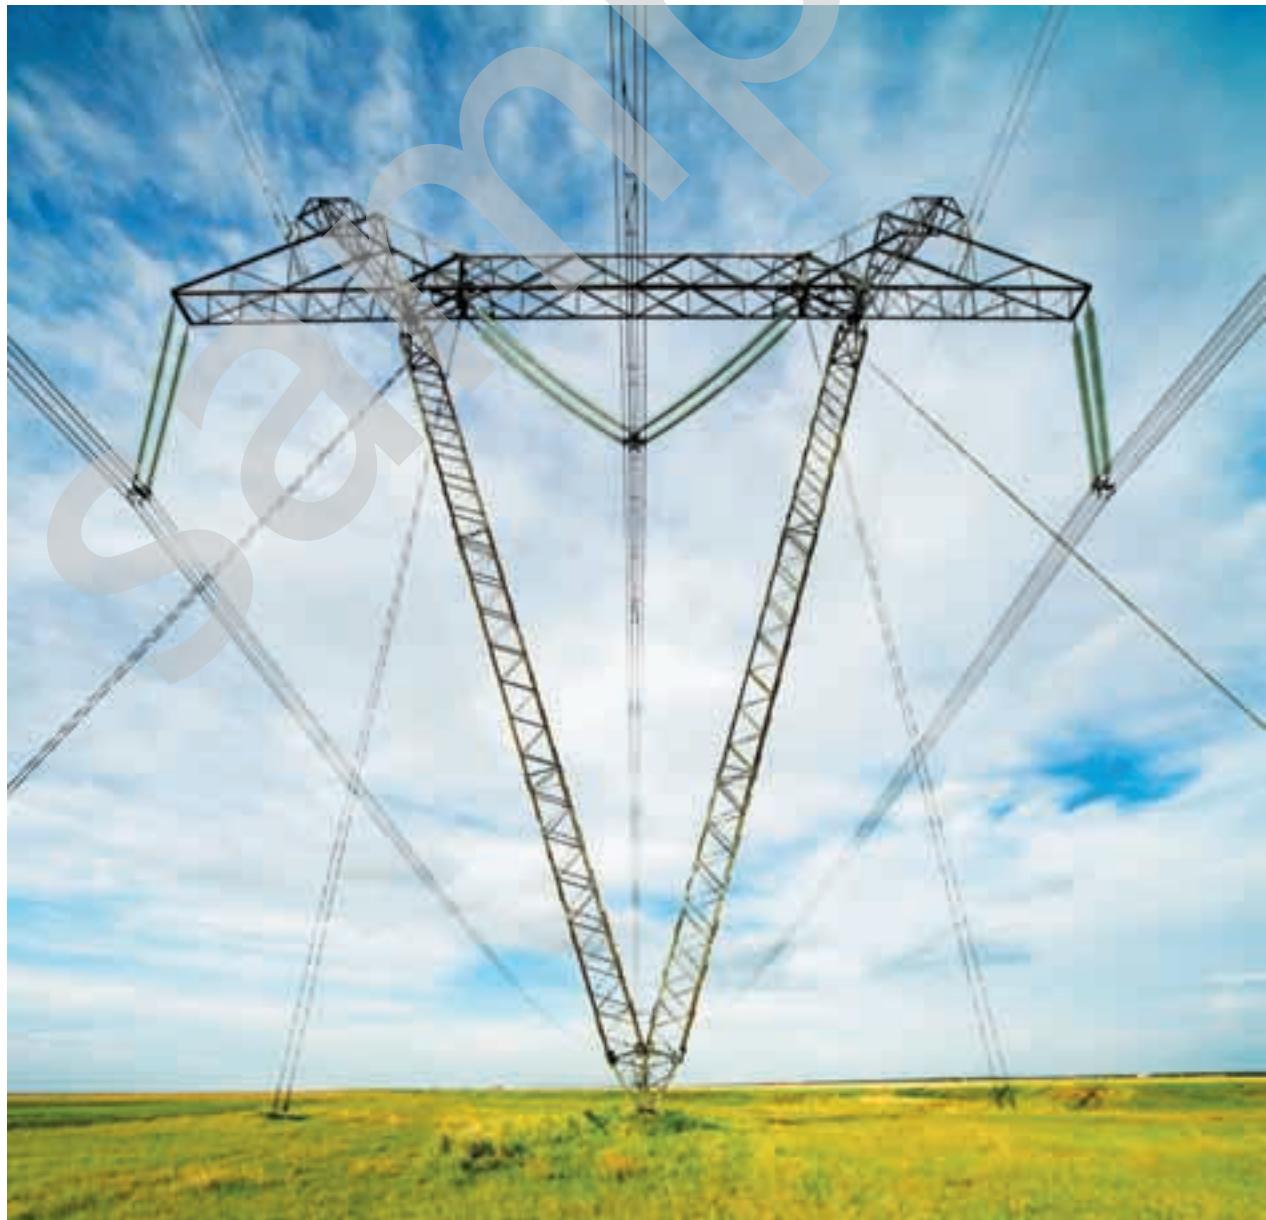

(© Vasiliy Koval/Fotolia)

This electric transmission tower is stabilized by cables that exert forces on the tower at their points of connection. In this chapter we will show how to express these forces as Cartesian vectors, and then determine their resultant.

Force Vectors

CHAPTER OBJECTIVES

- To show how to add forces and resolve them into components using the Parallelogram Law.
- To express force and position in Cartesian vector form and explain how to determine the vector's magnitude and direction.
- To introduce the dot product in order to use it to find the angle between two vectors or the projection of one vector onto another.

2.1 Scalars and Vectors

Many physical quantities in engineering mechanics are measured using either scalars or vectors.

Scalar. A *scalar* is any positive or negative physical quantity that can be completely specified by its *magnitude*. Examples of scalar quantities include length, mass, and time.

Vector. A *vector* is any physical quantity that requires both a *magnitude* and a *direction* for its complete description. Examples of vectors encountered in statics are force, position, and moment. A vector is shown graphically by an arrow. The length of the arrow represents the *magnitude* of the vector, and the angle θ between the vector and a fixed axis defines the *direction of its line of action*. The head or tip of the arrow indicates the *sense of direction* of the vector, Fig. 2–1.

In print, vector quantities are represented by boldface letters such as **A**, and the magnitude of a vector is italicized, *A*. For handwritten work, it is often convenient to denote a vector quantity by simply drawing an arrow above it, \vec{A} .


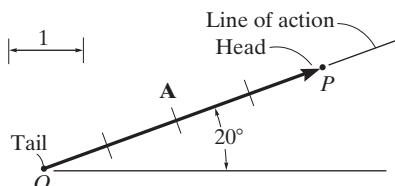


Fig. 2–1

2.2 Vector Operations

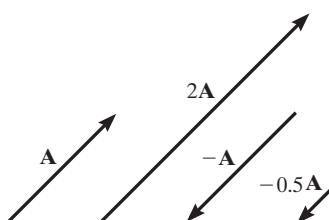

Scalar multiplication and division

Fig. 2-2

Multiplication and Division of a Vector by a Scalar. If a vector is multiplied by a positive scalar, its magnitude is increased by that amount. Multiplying by a negative scalar will also change the directional sense of the vector. Graphic examples of these operations are shown in Fig. 2-2.

Vector Addition. When adding two vectors together it is important to account for both their magnitudes and their directions. To do this we must use the *parallelogram law of addition*. To illustrate, the two *component vectors* \mathbf{A} and \mathbf{B} in Fig. 2-3a are added to form a *resultant vector* $\mathbf{R} = \mathbf{A} + \mathbf{B}$ using the following procedure:

- First join the tails of the components at a point to make them concurrent, Fig. 2-3b.
- From the head of \mathbf{B} , draw a line parallel to \mathbf{A} . Draw another line from the head of \mathbf{A} that is parallel to \mathbf{B} . These two lines intersect at point P to form the adjacent sides of a parallelogram.
- The diagonal of this parallelogram that extends to P forms \mathbf{R} , which then represents the resultant vector $\mathbf{R} = \mathbf{A} + \mathbf{B}$, Fig. 2-3c.

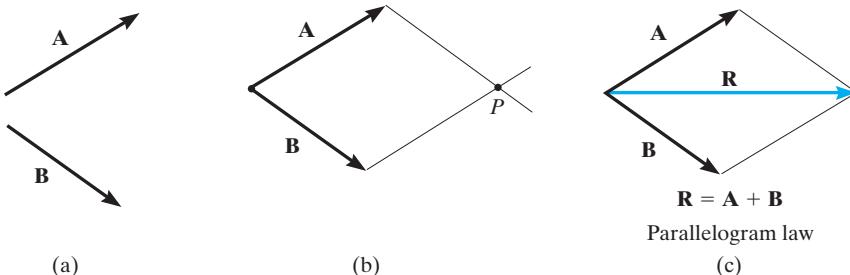


Fig. 2-3

We can also add \mathbf{B} to \mathbf{A} , Fig. 2-4a, using the *triangle rule*, which is a special case of the parallelogram law, whereby vector \mathbf{B} is added to vector \mathbf{A} in a “head-to-tail” fashion, i.e., by connecting the head of \mathbf{A} to the tail of \mathbf{B} , Fig. 2-4b. The resultant \mathbf{R} extends from the tail of \mathbf{A} to the head of \mathbf{B} . In a similar manner, \mathbf{R} can also be obtained by adding \mathbf{A} to \mathbf{B} , Fig. 2-4c. By comparison, it is seen that vector addition is commutative; in other words, the vectors can be added in either order, i.e., $\mathbf{R} = \mathbf{A} + \mathbf{B} = \mathbf{B} + \mathbf{A}$.

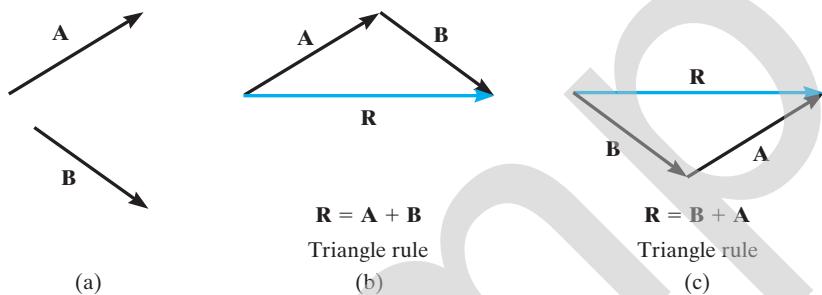


Fig. 2-4

As a special case, if the two vectors **A** and **B** are *collinear*, i.e., both have the same line of action, the parallelogram law reduces to an *algebraic* or *scalar addition* $R = A + B$, as shown in Fig. 2-5.

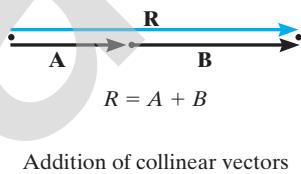


Fig. 2-5

Vector Subtraction. The resultant of the *difference* between two vectors **A** and **B** of the same type may be expressed as

$$\mathbf{R}' = \mathbf{A} - \mathbf{B} = \mathbf{A} + (-\mathbf{B})$$

This vector sum is shown graphically in Fig. 2-6. Subtraction is therefore defined as a special case of addition, so the rules of vector addition also apply to vector subtraction.


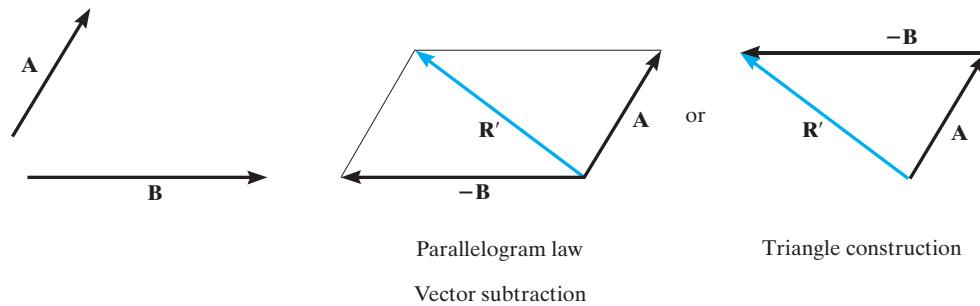


Fig. 2-6

2.3 Vector Addition of Forces

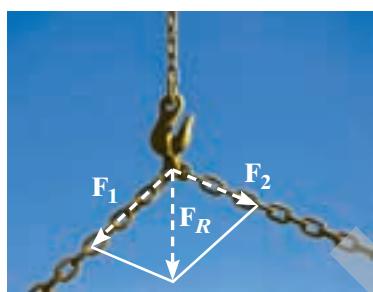

The parallelogram law must be used to determine the resultant of the two forces acting on the hook.
© Russell C. Hibbeler

Experimental evidence has shown that a force is a vector quantity since it has a specified magnitude, direction, and sense and it adds according to the parallelogram law. Two common problems in statics involve either finding the resultant force, knowing its components, or resolving a known force into two components. We will now describe how each of these problems is solved using the parallelogram law.

Finding a Resultant Force. The two component forces \mathbf{F}_1 and \mathbf{F}_2 acting on the pin in Fig. 2–7a can be added together to form the resultant force $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$, as shown in Fig. 2–7b. From this construction, or using the triangle rule, Fig. 2–7c, we can apply the law of cosines or the law of sines to the triangle in order to obtain the magnitude of the resultant force and its direction.



Using the parallelogram law the supporting force \mathbf{F} can be resolved into components acting along the u and v axes.
© Russell C. Hibbeler

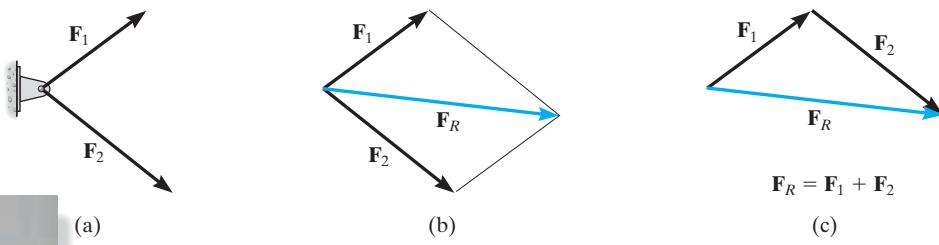


Fig. 2–7

Finding the Components of a Force. Sometimes it is necessary to resolve a force into two *components* in order to study its pulling or pushing effect in two specific directions. For example, in Fig. 2–8a, \mathbf{F} is to be resolved into two components along the two members, defined by the u and v axes. In order to determine the magnitude of each component, a parallelogram is constructed first, by drawing lines starting from the tip of \mathbf{F} , one line parallel to u , and the other line parallel to v . These lines then intersect with the v and u axes, forming a parallelogram. The force components \mathbf{F}_u and \mathbf{F}_v are then established by simply joining the tail of \mathbf{F} to the intersection points on the u and v axes, Fig. 2–8b. This parallelogram can then be reduced to a triangle, which represents the triangle rule, Fig. 2–8c. From this, the law of sines can then be applied to determine the unknown magnitudes of the components.

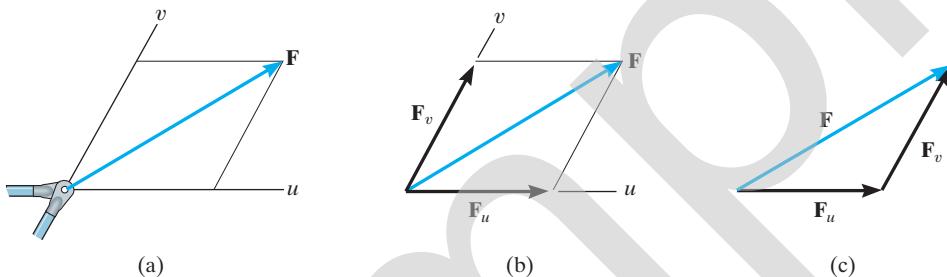


Fig. 2-8

Addition of Several Forces. If more than two forces are to be added, successive applications of the parallelogram law can be carried out in order to obtain the resultant force. For example, if three forces $\mathbf{F}_1, \mathbf{F}_2, \mathbf{F}_3$ act at a point O , Fig. 2-9, the resultant of any two of the forces is found, say, $\mathbf{F}_1 + \mathbf{F}_2$ —and then this resultant is added to the third force, yielding the resultant of all three forces; i.e., $\mathbf{F}_R = (\mathbf{F}_1 + \mathbf{F}_2) + \mathbf{F}_3$. Using the parallelogram law to add more than two forces, as shown here, often requires extensive geometric and trigonometric calculation to determine the numerical values for the magnitude and direction of the resultant. Instead, problems of this type are easily solved by using the “rectangular-component method,” which is explained in Sec. 2.4.


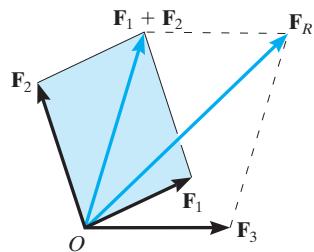


Fig. 2-9

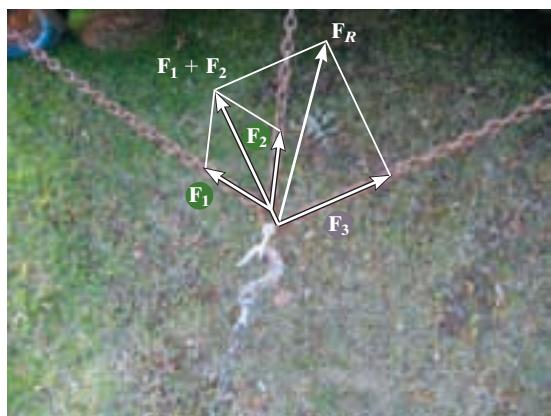

The resultant force \mathbf{F}_R on the hook requires the addition of $\mathbf{F}_1 + \mathbf{F}_2$, then this resultant is added to \mathbf{F}_3 . (© Russell C. Hibbeler)

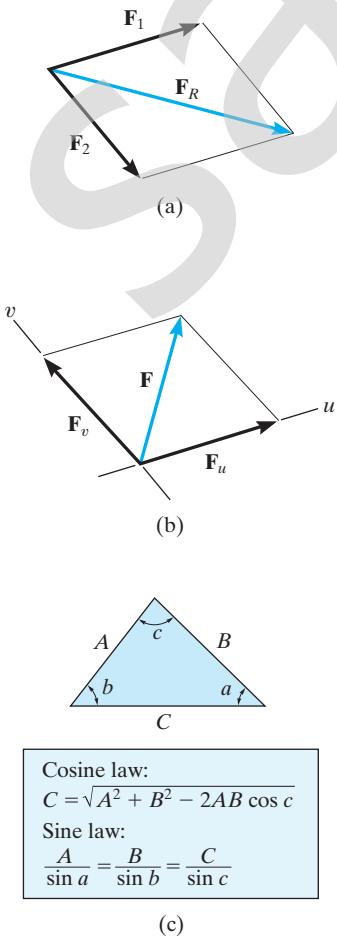


Fig. 2-10

Important Points

- A scalar is a positive or negative number.
- A vector is a quantity that has a magnitude, direction, and sense.
- Multiplication or division of a vector by a scalar will change the magnitude of the vector. The sense of the vector will change if the scalar is negative.
- As a special case, if the vectors are collinear, the resultant is formed by an algebraic or scalar addition.

Procedure for Analysis

Problems that involve the addition of two forces can be solved as follows:

Parallelogram Law.


- Two “component” forces \mathbf{F}_1 and \mathbf{F}_2 in Fig. 2–10a add according to the parallelogram law, yielding a *resultant* force \mathbf{F}_R that forms the diagonal of the parallelogram.
- If a force \mathbf{F} is to be resolved into *components* along two axes u and v , Fig. 2–10b, then start at the head of force \mathbf{F} and construct lines parallel to the axes, thereby forming the parallelogram. The sides of the parallelogram represent the components, \mathbf{F}_u and \mathbf{F}_v .
- Label all the known and unknown force magnitudes and the angles on the sketch and identify the two unknowns as the magnitude and direction of \mathbf{F}_R , or the magnitudes of its components.

Trigonometry.


- Redraw a half portion of the parallelogram to illustrate the triangular head-to-tail addition of the components.
- From this triangle, the magnitude of the resultant force can be determined using the law of cosines, and its direction is determined from the law of sines. The magnitudes of two force components are determined from the law of sines. The formulas are given in Fig. 2–10c.

EXAMPLE | 2.1

The screw eye in Fig. 2–11a is subjected to two forces, \mathbf{F}_1 and \mathbf{F}_2 . Determine the magnitude and direction of the resultant force.

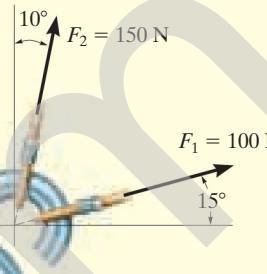

(a)

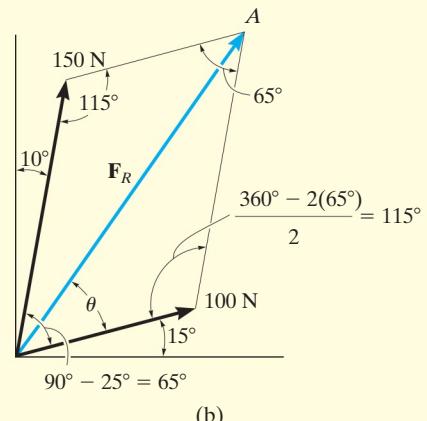

(b)

SOLUTION

Parallelogram Law. The parallelogram is formed by drawing a line from the head of \mathbf{F}_1 that is parallel to \mathbf{F}_2 , and another line from the head of \mathbf{F}_2 that is parallel to \mathbf{F}_1 . The resultant force \mathbf{F}_R extends to where these lines intersect at point A, Fig. 2–11b. The two unknowns are the magnitude of \mathbf{F}_R and the angle θ (theta).

Trigonometry. From the parallelogram, the vector triangle is constructed, Fig. 2–11c. Using the law of cosines

$$\begin{aligned} F_R &= \sqrt{(100 \text{ N})^2 + (150 \text{ N})^2 - 2(100 \text{ N})(150 \text{ N}) \cos 115^\circ} \\ &= \sqrt{10\,000 + 22\,500 - 30\,000(-0.4226)} = 212.6 \text{ N} \\ &= 213 \text{ N} \end{aligned} \quad \text{Ans.}$$


Applying the law of sines to determine θ ,

$$\frac{150 \text{ N}}{\sin \theta} = \frac{212.6 \text{ N}}{\sin 115^\circ} \quad \sin \theta = \frac{150 \text{ N}}{212.6 \text{ N}} (\sin 115^\circ)$$

$$\theta = 39.8^\circ$$

Thus, the direction ϕ (phi) of \mathbf{F}_R , measured from the horizontal, is

$$\phi = 39.8^\circ + 15.0^\circ = 54.8^\circ \quad \text{Ans.}$$

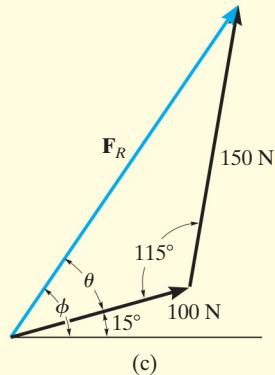**Fig. 2–11**

NOTE: The results seem reasonable, since Fig. 2–11b shows \mathbf{F}_R to have a magnitude larger than its components and a direction that is between them.

EXAMPLE | 2.2

Resolve the horizontal 600-lb force in Fig. 2–12a into components acting along the u and v axes and determine the magnitudes of these components.

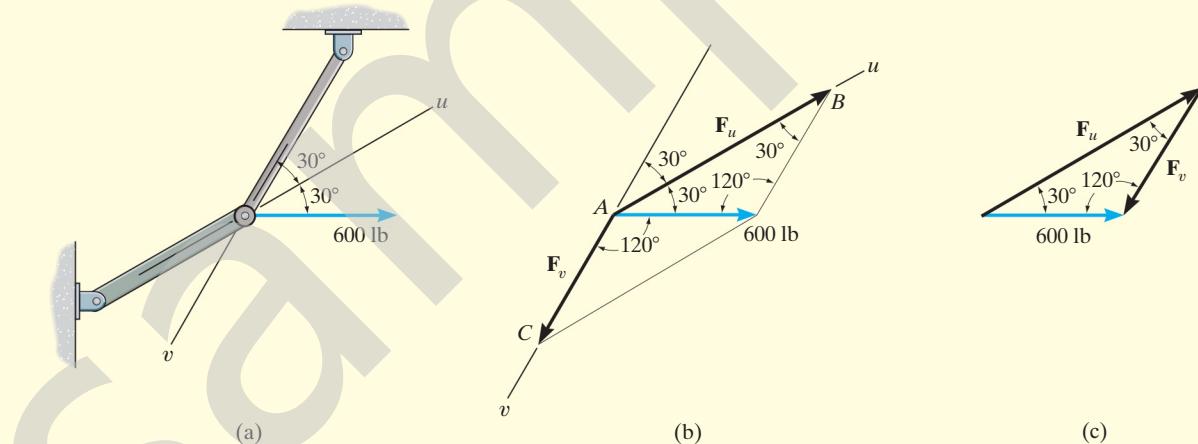


Fig. 2-12

SOLUTION

The parallelogram is constructed by extending a line from the *head* of the 600-lb force parallel to the v axis until it intersects the u axis at point B , Fig. 2–12b. The arrow from A to B represents \mathbf{F}_u . Similarly, the line extended from the head of the 600-lb force drawn parallel to the u axis intersects the v axis at point C , which gives \mathbf{F}_v .

The vector addition using the triangle rule is shown in Fig. 2–12c. The two unknowns are the magnitudes of \mathbf{F}_u and \mathbf{F}_v . Applying the law of sines,

$$\frac{F_u}{\sin 120^\circ} = \frac{600 \text{ lb}}{\sin 30^\circ}$$

$$F_u = 1039 \text{ lb} \quad \text{Ans.}$$

$$\frac{F_v}{\sin 30^\circ} = \frac{600 \text{ lb}}{\sin 30^\circ}$$

$$F_v = 600 \text{ lb} \quad \text{Ans.}$$

NOTE: The result for F_u shows that sometimes a component can have a greater magnitude than the resultant.

EXAMPLE 2.3

Determine the magnitude of the component force \mathbf{F} in Fig. 2–13a and the magnitude of the resultant force \mathbf{F}_R if \mathbf{F}_R is directed along the positive y axis.

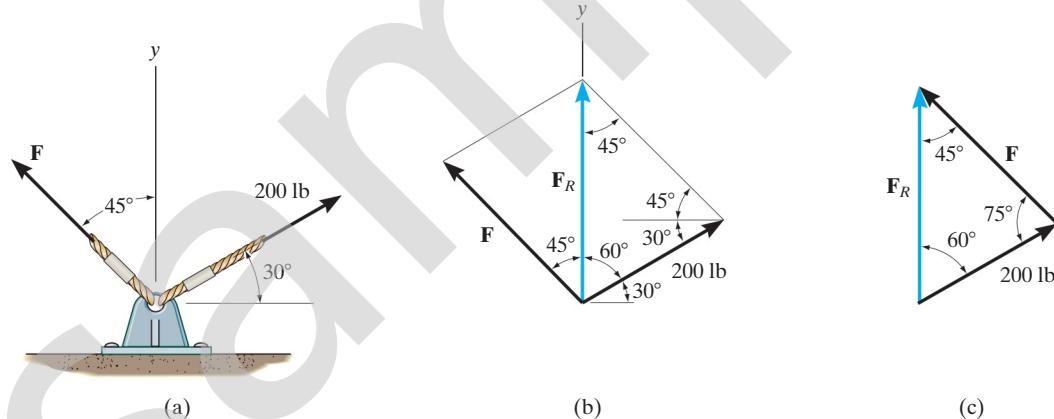


Fig. 2–13

SOLUTION

The parallelogram law of addition is shown in Fig. 2–13b, and the triangle rule is shown in Fig. 2–13c. The magnitudes of \mathbf{F}_R and \mathbf{F} are the two unknowns. They can be determined by applying the law of sines.

$$\frac{F}{\sin 60^\circ} = \frac{200 \text{ lb}}{\sin 45^\circ}$$

$$F = 245 \text{ lb}$$

Ans.

$$\frac{F_R}{\sin 75^\circ} = \frac{200 \text{ lb}}{\sin 45^\circ}$$

$$F_R = 273 \text{ lb}$$

Ans.

EXAMPLE | 2.4

It is required that the resultant force acting on the eyebolt in Fig. 2–14a be directed along the positive x axis and that \mathbf{F}_2 have a *minimum* magnitude. Determine this magnitude, the angle θ , and the corresponding resultant force.

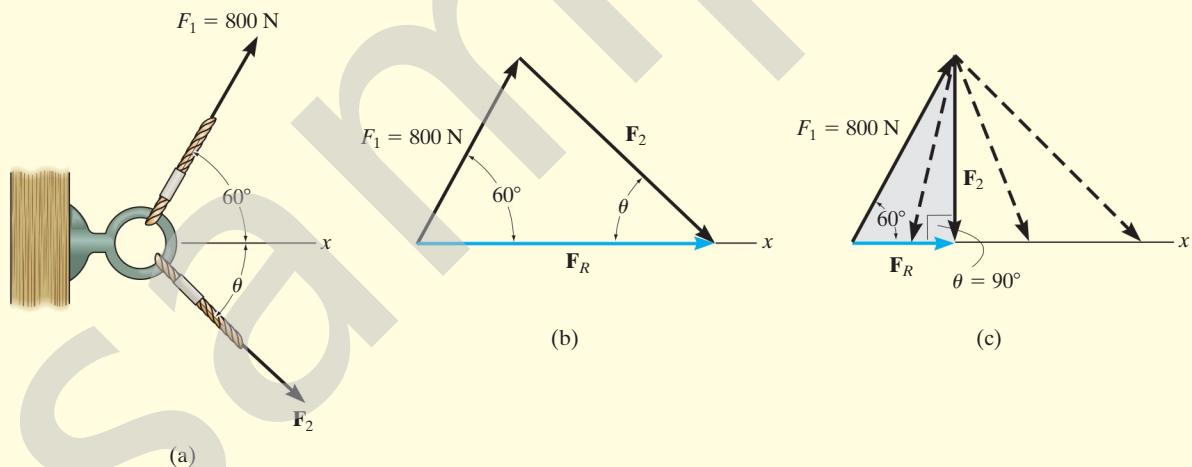


Fig. 2-14

SOLUTION

The triangle rule for $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$ is shown in Fig. 2–14b. Since the magnitudes (lengths) of \mathbf{F}_R and \mathbf{F}_2 are not specified, then \mathbf{F}_2 can actually be any vector that has its head touching the line of action of \mathbf{F}_R , Fig. 2–14c. However, as shown, the magnitude of \mathbf{F}_2 is a *minimum* or the shortest length when its line of action is *perpendicular* to the line of action of \mathbf{F}_R , that is, when

$$\theta = 90^\circ$$

Ans.

Since the vector addition now forms the shaded right triangle, the two unknown magnitudes can be obtained by trigonometry.

$$F_R = (800 \text{ N})\cos 60^\circ = 400 \text{ N}$$

Ans.

$$F_2 = (800 \text{ N})\sin 60^\circ = 693 \text{ N}$$


Ans.

It is strongly suggested that you test yourself on the solutions to these examples, by covering them over and then trying to draw the parallelogram law, and thinking about how the sine and cosine laws are used to determine the unknowns. Then before solving any of the problems, try to solve the Preliminary Problems and some of the Fundamental Problems given on the next pages. The solutions and answers to these are given in the back of the book. Doing this throughout the book will help immensely in developing your problem-solving skills.


PRELIMINARY PROBLEMS

Partial solutions and answers to all Preliminary Problems are given in the back of the book.


P2–1. In each case, construct the parallelogram law to show $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$. Then establish the triangle rule, where $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$. Label all known and unknown sides and internal angles.

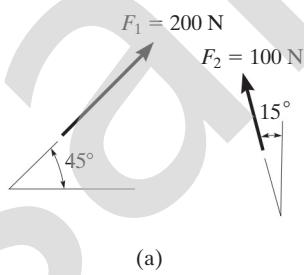

(a)

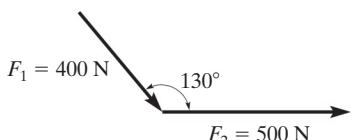


(b)




(c)

Prob. P2–1


P2–2. In each case, show how to resolve the force \mathbf{F} into components acting along the u and v axes using the parallelogram law. Then establish the triangle rule to show $\mathbf{F}_R = \mathbf{F}_u + \mathbf{F}_v$. Label all known and unknown sides and interior angles.

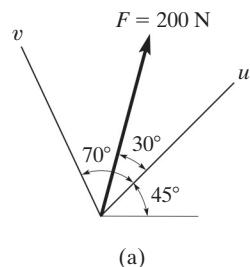

(a)

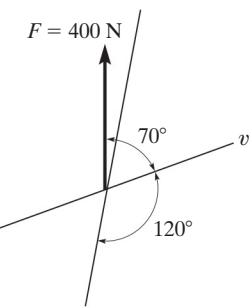

(b)

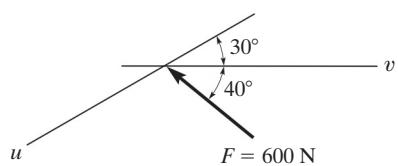


(c)

Prob. P2–2

FUNDAMENTAL PROBLEMS


Partial solutions and answers to all Fundamental Problems are given in the back of the book.

- F2–1.** Determine the magnitude of the resultant force acting on the screw eye and its direction measured clockwise from the x axis.

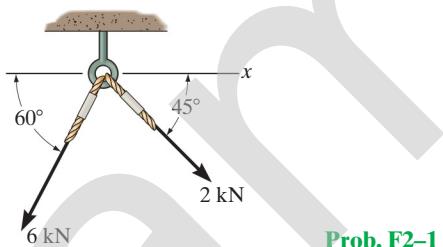


Prob. F2–1

- F2–2.** Two forces act on the hook. Determine the magnitude of the resultant force.

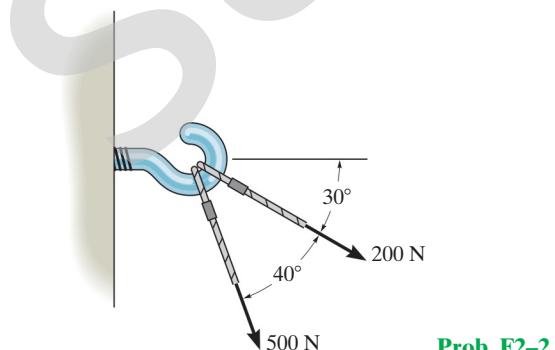


Prob. F2–2

- F2–3.** Determine the magnitude of the resultant force and its direction measured counterclockwise from the positive x axis.

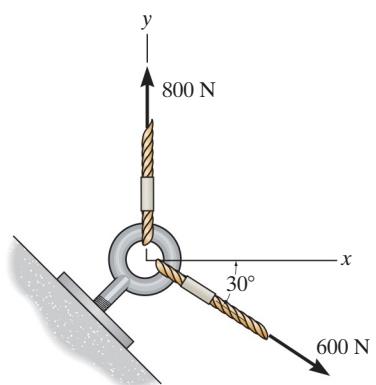


Prob. F2–3

- F2–4.** Resolve the 30-lb force into components along the u and v axes, and determine the magnitude of each of these components.

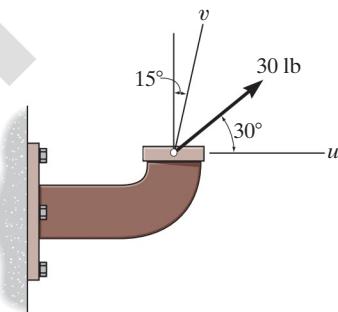


Prob. F2–4

- F2–5.** The force $F = 450$ lb acts on the frame. Resolve this force into components acting along members AB and AC , and determine the magnitude of each component.

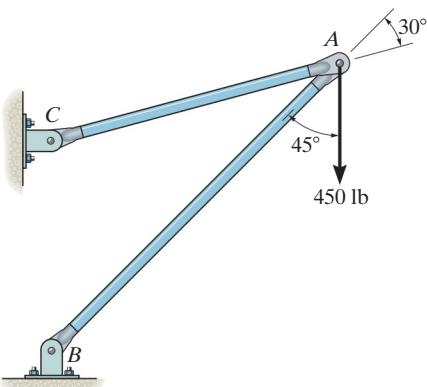

Prob. F2–5


- F2–6.** If force \mathbf{F} is to have a component along the u axis of $F_u = 6$ kN, determine the magnitude of \mathbf{F} and the magnitude of its component \mathbf{F}_v along the v axis.

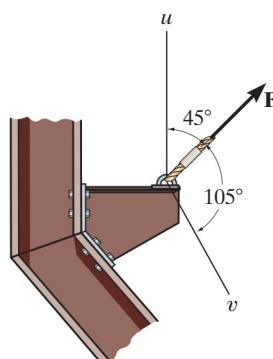


Prob. F2–6

2-1. If $\theta = 60^\circ$ and $F = 450 \text{ N}$, determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

2-2. If the magnitude of the resultant force is to be 500 N , directed along the positive y axis, determine the magnitude of force \mathbf{F} and its direction θ .

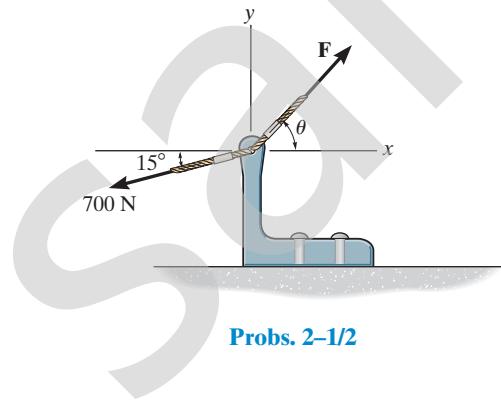


2-3. Determine the magnitude of the resultant force $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$ and its direction, measured counterclockwise from the positive x axis.

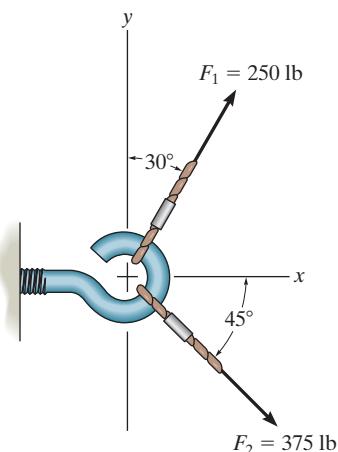

Prob. 2-3

***2-4.** The vertical force \mathbf{F} acts downward at A on the two-membered frame. Determine the magnitudes of the two components of \mathbf{F} directed along the axes of AB and AC . Set $F = 500 \text{ N}$.

2-5. Solve Prob. 2-4 with $F = 350 \text{ lb}$.

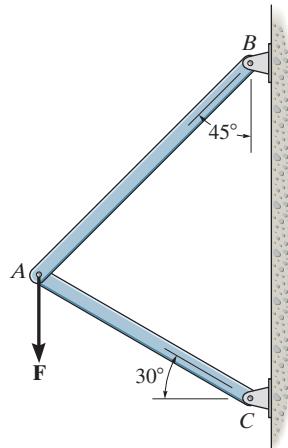


Probs. 2-4/5

2-6. Determine the magnitude of the resultant force $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$ and its direction, measured clockwise from the positive u axis.


2-7. Resolve the force \mathbf{F}_1 into components acting along the u and v axes and determine the magnitudes of the components.

***2-8.** Resolve the force \mathbf{F}_2 into components acting along the u and v axes and determine the magnitudes of the components.

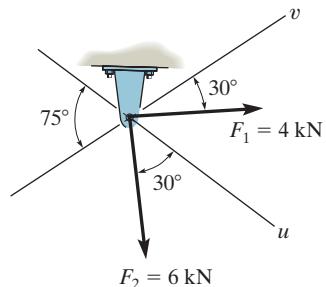


Probs. 2-6/7/8

- 2-9.** If the resultant force acting on the support is to be 1200 lb, directed horizontally to the right, determine the force \mathbf{F} in rope A and the corresponding angle θ .

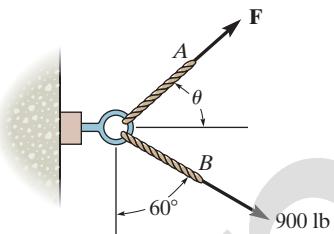

Prob. 2-9


- 2-10.** Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

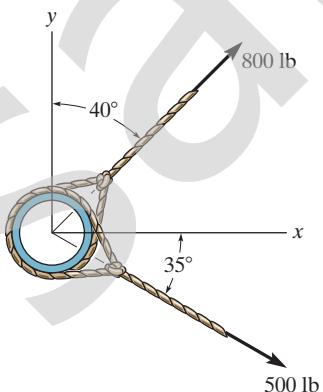

Prob. 2-10

- 2-11.** The plate is subjected to the two forces at A and B as shown. If $\theta = 60^\circ$, determine the magnitude of the resultant of these two forces and its direction measured clockwise from the horizontal.


- *2-12.** Determine the angle θ for connecting member A to the plate so that the resultant force of \mathbf{F}_A and \mathbf{F}_B is directed horizontally to the right. Also, what is the magnitude of the resultant force?

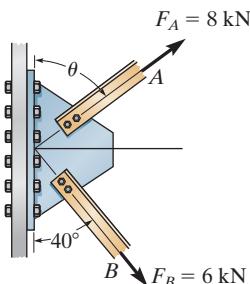

Probs. 2-11/12

- 2-13.** The force acting on the gear tooth is $F = 20$ lb. Resolve this force into two components acting along the lines aa and bb .


- 2-14.** The component of force \mathbf{F} acting along line aa is required to be 30 lb. Determine the magnitude of \mathbf{F} and its component along line bb .

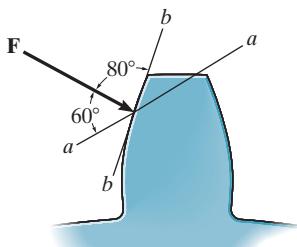

Probs. 2-13/14

- 2-15.** Force \mathbf{F} acts on the frame such that its component acting along member AB is 650 lb, directed from B towards A , and the component acting along member BC is 500 lb, directed from B towards C . Determine the magnitude of \mathbf{F} and its direction θ . Set $\phi = 60^\circ$.


- *2-16.** Force \mathbf{F} acts on the frame such that its component acting along member AB is 650 lb, directed from B towards A . Determine the required angle ϕ ($0^\circ \leq \phi \leq 45^\circ$) and the component acting along member BC . Set $F = 850$ lb and $\theta = 30^\circ$.

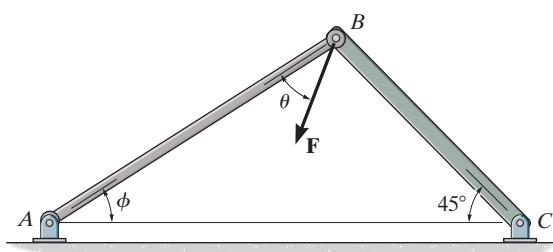

Probs. 2-15/16

2-17. Determine the magnitude and direction of the resultant $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$ of the three forces by first finding the resultant $\mathbf{F}' = \mathbf{F}_1 + \mathbf{F}_2$ and then forming $\mathbf{F}_R = \mathbf{F}' + \mathbf{F}_3$.


2-18. Determine the magnitude and direction of the resultant $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3$ of the three forces by first finding the resultant $\mathbf{F}' = \mathbf{F}_2 + \mathbf{F}_3$ and then forming $\mathbf{F}_R = \mathbf{F}' + \mathbf{F}_1$.

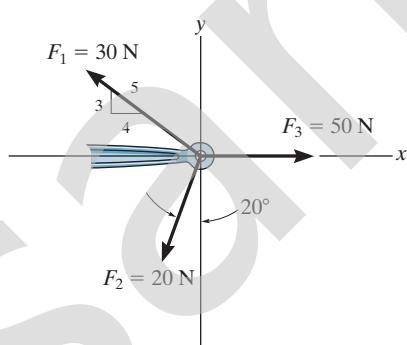

Probs. 2-17/18

2-19. Determine the design angle θ ($0^\circ \leq \theta \leq 90^\circ$) for strut AB so that the 400-lb horizontal force has a component of 500 lb directed from A towards C . What is the component of force acting along member AB ? Take $\phi = 40^\circ$.


***2-20.** Determine the design angle ϕ ($0^\circ \leq \phi \leq 90^\circ$) between struts AB and AC so that the 400-lb horizontal force has a component of 600 lb which acts up to the left, in the same direction as from B towards A . Take $\theta = 30^\circ$.

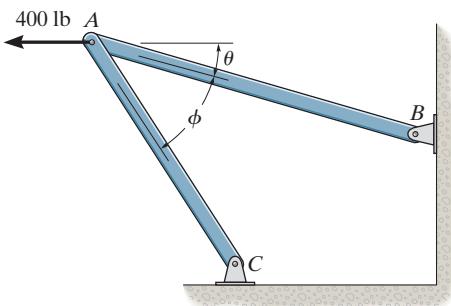

Probs. 2-19/20

2-21. Determine the magnitude and direction of the resultant force, \mathbf{F}_R measured counterclockwise from the positive x axis. Solve the problem by first finding the resultant $\mathbf{F}' = \mathbf{F}_1 + \mathbf{F}_2$ and then forming $\mathbf{F}_R = \mathbf{F}' + \mathbf{F}_3$.


2-22. Determine the magnitude and direction of the resultant force, measured counterclockwise from the positive x axis. Solve l by first finding the resultant $\mathbf{F}' = \mathbf{F}_2 + \mathbf{F}_3$ and then forming $\mathbf{F}_R = \mathbf{F}' + \mathbf{F}_1$.

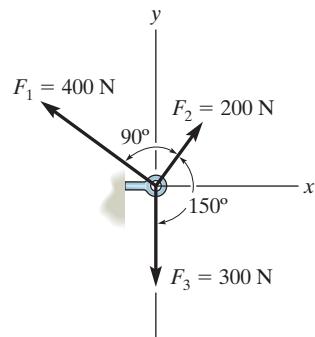

Probs. 2-21/22


2-23. Two forces act on the screw eye. If $F_1 = 400$ N and $F_2 = 600$ N, determine the angle θ ($0^\circ \leq \theta \leq 180^\circ$) between them, so that the resultant force has a magnitude of $F_R = 800$ N.

***2-24.** Two forces \mathbf{F}_1 and \mathbf{F}_2 act on the screw eye. If their lines of action are at an angle θ apart and the magnitude of each force is $F_1 = F_2 = F$, determine the magnitude of the resultant force \mathbf{F}_R and the angle between \mathbf{F}_R and \mathbf{F}_1 .

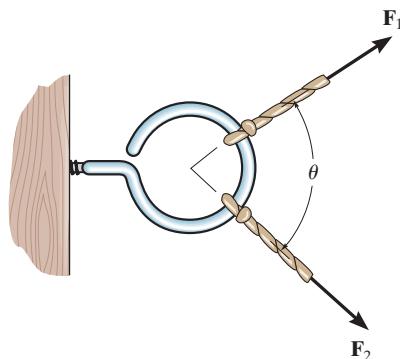

Probs. 2-23/24


2-25. If $F_1 = 30$ lb and $F_2 = 40$ lb, determine the angles θ and ϕ so that the resultant force is directed along the positive x axis and has a magnitude of $F_R = 60$ lb.

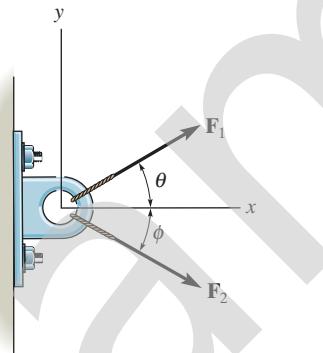

Prob. 2-25


2-26. Determine the magnitude and direction θ of \mathbf{F}_A so that the resultant force is directed along the positive x axis and has a magnitude of 1250 N.

2-27. Determine the magnitude and direction, measured counterclockwise from the positive x axis, of the resultant force acting on the ring at O , if $F_A = 750$ N and $\theta = 45^\circ$.

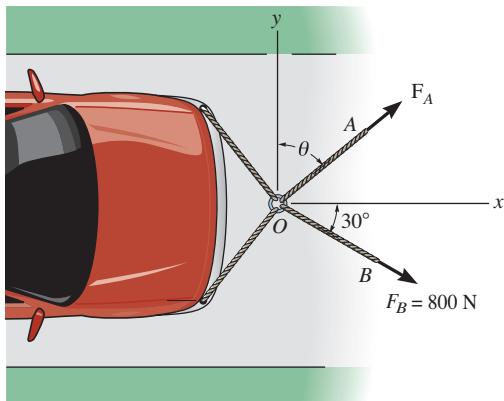

Probs. 2-26/27

***2-28.** Determine the magnitude of force \mathbf{F} so that the resultant force \mathbf{F}_R of the three forces is as small as possible. What is the minimum magnitude of \mathbf{F}_R ?

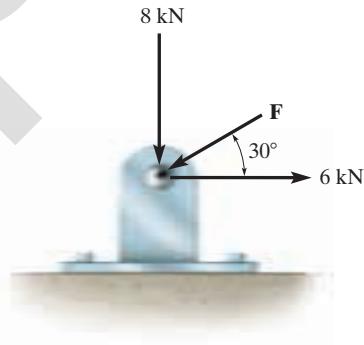


Prob. 2-28

2-29. If the resultant force of the two tugboats is 3 kN, directed along the positive x axis, determine the required magnitude of force \mathbf{F}_B and its direction θ .

2-30. If $\mathbf{F}_B = 3$ kN and $\theta = 45^\circ$, determine the magnitude of the resultant force of the two tugboats and its direction measured clockwise from the positive x axis.

2-31. If the resultant force of the two tugboats is required to be directed towards the positive x axis, and \mathbf{F}_B is to be a minimum, determine the magnitude of \mathbf{F}_R and \mathbf{F}_B and the angle θ .

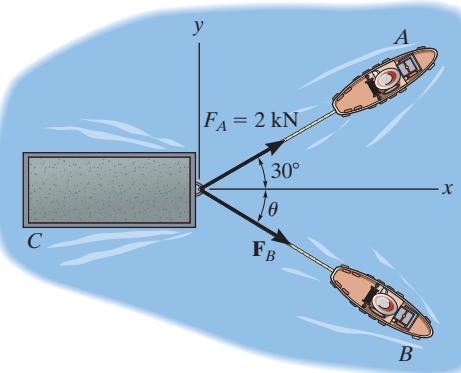

Probs. 2-29/30/31

2.4 Addition of a System of Coplanar Forces

When a force is resolved into two components along the x and y axes, the components are then called ***rectangular components***. For analytical work we can represent these components in one of two ways, using either scalar or Cartesian vector notation.

Scalar Notation. The rectangular components of force \mathbf{F} shown in Fig. 2–15a are found using the parallelogram law, so that $\mathbf{F} = \mathbf{F}_x + \mathbf{F}_y$. Because these components form a right triangle, they can be determined from

$$F_x = F \cos \theta \quad \text{and} \quad F_y = F \sin \theta$$

Instead of using the angle θ , however, the direction of \mathbf{F} can also be defined using a small “slope” triangle, as in the example shown in Fig. 2–15b. Since this triangle and the larger shaded triangle are similar, the proportional length of the sides gives

$$\frac{F_x}{F} = \frac{a}{c}$$

or

$$F_x = F \left(\frac{a}{c} \right)$$

and


$$\frac{F_y}{F} = \frac{b}{c}$$

or


$$F_y = -F \left(\frac{b}{c} \right)$$

Here the y component is a *negative scalar* since \mathbf{F}_y is directed along the negative y axis.

It is important to keep in mind that this positive and negative scalar notation is to be used only for computational purposes, not for graphical representations in figures. Throughout the book, the *head of a vector arrow* in *any figure* indicates the sense of the vector *graphically*; algebraic signs are not used for this purpose. Thus, the vectors in Figs. 2–15a and 2–15b are designated by using boldface (vector) notation.* Whenever italic symbols are written near vector arrows in figures, they indicate the *magnitude* of the vector, which is *always a positive quantity*.

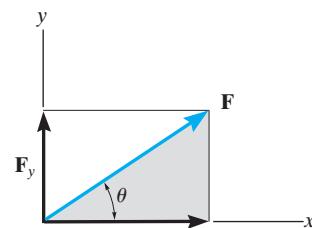

(a)

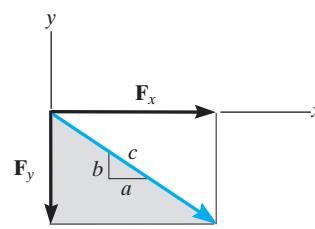

(b)

Fig. 2-15

*Negative signs are used only in figures with boldface notation when showing equal but opposite pairs of vectors, as in Fig. 2–2.

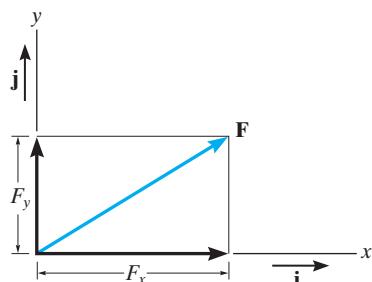


Fig. 2-16


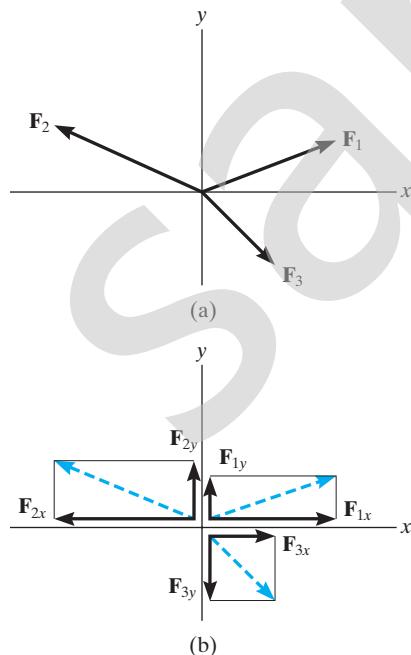


Fig. 2-17

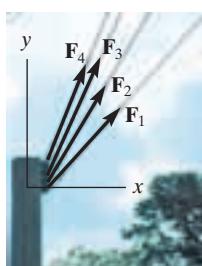

The resultant force of the four cable forces acting on the post can be determined by adding algebraically the separate x and y components of each cable force. This resultant \mathbf{F}_R produces the *same pulling effect* on the post as all four cables. (© Russell C. Hibbeler)

Cartesian Vector Notation. It is also possible to represent the x and y components of a force in terms of Cartesian unit vectors \mathbf{i} and \mathbf{j} . They are called unit vectors because they have a dimensionless magnitude of 1, and so they can be used to designate the *directions* of the x and y axes, respectively, Fig. 2-16.*

Since the *magnitude* of each component of \mathbf{F} is *always a positive quantity*, which is represented by the (positive) scalars F_x and F_y , then we can express \mathbf{F} as a **Cartesian vector**,

$$\mathbf{F} = F_x \mathbf{i} + F_y \mathbf{j}$$

Coplanar Force Resultants. We can use either of the two methods just described to determine the resultant of several **coplanar forces**, i.e., forces that all lie in the same plane. To do this, each force is first resolved into its x and y components, and then the respective components are added using *scalar algebra* since they are collinear. The resultant force is then formed by adding the resultant components using the parallelogram law. For example, consider the three concurrent forces in Fig. 2-17a, which have x and y components shown in Fig. 2-17b. Using Cartesian vector notation, each force is first represented as a Cartesian vector, i.e.,

$$\begin{aligned}\mathbf{F}_1 &= F_{1x} \mathbf{i} + F_{1y} \mathbf{j} \\ \mathbf{F}_2 &= -F_{2x} \mathbf{i} + F_{2y} \mathbf{j} \\ \mathbf{F}_3 &= F_{3x} \mathbf{i} - F_{3y} \mathbf{j}\end{aligned}$$

The vector resultant is therefore

$$\begin{aligned}\mathbf{F}_R &= \mathbf{F}_1 + \mathbf{F}_2 + \mathbf{F}_3 \\ &= F_{1x} \mathbf{i} + F_{1y} \mathbf{j} - F_{2x} \mathbf{i} + F_{2y} \mathbf{j} + F_{3x} \mathbf{i} - F_{3y} \mathbf{j} \\ &= (F_{1x} - F_{2x} + F_{3x}) \mathbf{i} + (F_{1y} + F_{2y} - F_{3y}) \mathbf{j} \\ &= (F_{Rx}) \mathbf{i} + (F_{Ry}) \mathbf{j}\end{aligned}$$

If *scalar notation* is used, then indicating the positive directions of components along the x and y axes with symbolic arrows, we have

$$\begin{array}{lcl} \xrightarrow{+} & (F_R)_x = F_{1x} - F_{2x} + F_{3x} \\ \uparrow & (F_R)_y = F_{1y} + F_{2y} - F_{3y} \end{array}$$

These are the *same* results as the \mathbf{i} and \mathbf{j} components of \mathbf{F}_R determined above.

*For handwritten work, unit vectors are usually indicated using a circumflex, e.g., $\hat{\mathbf{i}}$ and $\hat{\mathbf{j}}$. Also, realize that F_x and F_y in Fig. 2-16 represent the *magnitudes* of the components, which are *always positive scalars*. The directions are defined by \mathbf{i} and \mathbf{j} . If instead we used scalar notation, then F_x and F_y could be positive or negative scalars, since they would account for *both* the magnitude and direction of the components.

We can represent the components of the resultant force of any number of coplanar forces symbolically by the algebraic sum of the x and y components of all the forces, i.e.,

$$\begin{aligned}(F_R)_x &= \Sigma F_x \\ (F_R)_y &= \Sigma F_y\end{aligned}\quad (2-1)$$

Once these components are determined, they may be sketched along the x and y axes with their proper sense of direction, and the resultant force can be determined from vector addition, as shown in Fig. 2-17c. From this sketch, the magnitude of \mathbf{F}_R is then found from the Pythagorean theorem; that is,

$$F_R = \sqrt{(F_R)_x^2 + (F_R)_y^2}$$

Also, the angle θ , which specifies the direction of the resultant force, is determined from trigonometry:

$$\theta = \tan^{-1} \left| \frac{(F_R)_y}{(F_R)_x} \right|$$

The above concepts are illustrated numerically in the examples which follow.

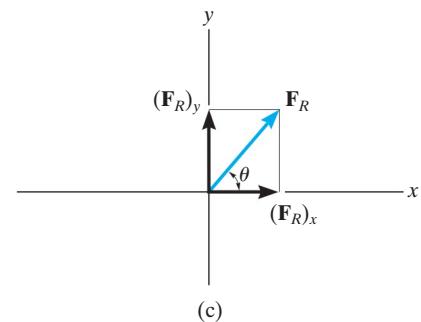


Fig. 2-17 (cont.)

Important Points

- The resultant of several coplanar forces can easily be determined if an x , y coordinate system is established and the forces are resolved along the axes.
- The direction of each force is specified by the angle its line of action makes with one of the axes, or by a slope triangle.
- The orientation of the x and y axes is arbitrary, and their positive direction can be specified by the Cartesian unit vectors \mathbf{i} and \mathbf{j} .
- The x and y components of the *resultant force* are simply the algebraic addition of the components of all the coplanar forces.
- The magnitude of the resultant force is determined from the Pythagorean theorem, and when the resultant components are sketched on the x and y axes, Fig. 2-17c, the direction θ can be determined from trigonometry.

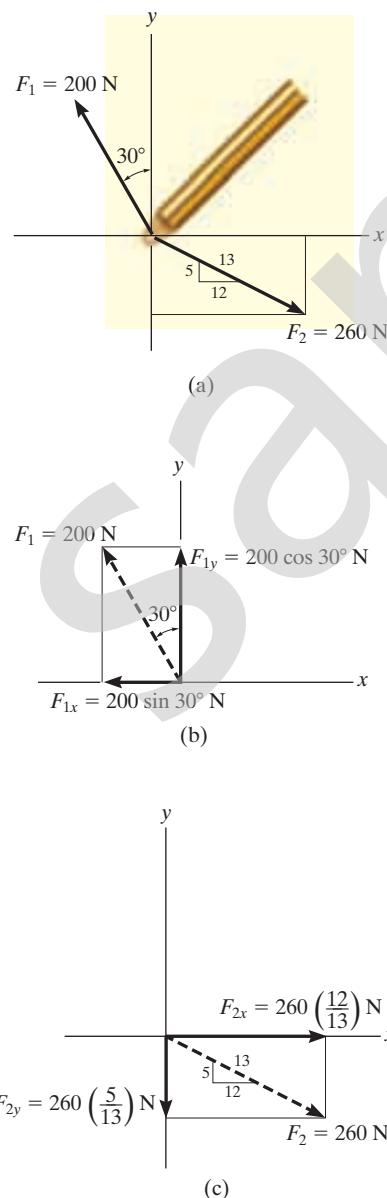


Fig. 2-18

Determine the x and y components of \mathbf{F}_1 and \mathbf{F}_2 acting on the boom shown in Fig. 2-18a. Express each force as a Cartesian vector.

SOLUTION

Scalar Notation. By the parallelogram law, \mathbf{F}_1 is resolved into x and y components, Fig. 2-18b. Since \mathbf{F}_{1x} acts in the $-x$ direction, and \mathbf{F}_{1y} acts in the $+y$ direction, we have

$$F_{1x} = -200 \sin 30^\circ \text{ N} = -100 \text{ N} = 100 \text{ N} \leftarrow \quad \text{Ans.}$$

$$F_{1y} = 200 \cos 30^\circ \text{ N} = 173 \text{ N} = 173 \text{ N} \uparrow \quad \text{Ans.}$$

The force \mathbf{F}_2 is resolved into its x and y components, as shown in Fig. 2-18c. Here the *slope* of the line of action for the force is indicated. From this “slope triangle” we could obtain the angle θ , e.g., $\theta = \tan^{-1}\left(\frac{5}{12}\right)$, and then proceed to determine the magnitudes of the components in the same manner as for \mathbf{F}_1 . The easier method, however, consists of using proportional parts of similar triangles, i.e.,

$$\frac{F_{2x}}{260 \text{ N}} = \frac{12}{13} \quad F_{2x} = 260 \text{ N} \left(\frac{12}{13} \right) = 240 \text{ N}$$

Similarly,

$$F_{2y} = 260 \text{ N} \left(\frac{5}{13} \right) = 100 \text{ N}$$

Notice how the magnitude of the *horizontal component*, \mathbf{F}_{2x} , was obtained by multiplying the force magnitude by the ratio of the *horizontal leg* of the slope triangle divided by the hypotenuse; whereas the magnitude of the *vertical component*, \mathbf{F}_{2y} , was obtained by multiplying the force magnitude by the ratio of the *vertical leg* divided by the hypotenuse. Hence, using scalar notation to represent these components, we have

$$F_{2x} = 240 \text{ N} = 240 \text{ N} \rightarrow \quad \text{Ans.}$$

$$F_{2y} = -100 \text{ N} = 100 \text{ N} \downarrow \quad \text{Ans.}$$

Cartesian Vector Notation. Having determined the magnitudes and directions of the components of each force, we can express each force as a Cartesian vector.

$$\mathbf{F}_1 = \{-100\mathbf{i} + 173\mathbf{j}\} \text{ N} \quad \text{Ans.}$$

$$\mathbf{F}_2 = \{240\mathbf{i} - 100\mathbf{j}\} \text{ N} \quad \text{Ans.}$$

EXAMPLE | 2.6

The link in Fig. 2–19a is subjected to two forces \mathbf{F}_1 and \mathbf{F}_2 . Determine the magnitude and direction of the resultant force.

SOLUTION I

Scalar Notation. First we resolve each force into its x and y components, Fig. 2–19b, then we sum these components algebraically.

$$\begin{aligned} \rightarrow (F_R)_x &= \Sigma F_x; \quad (F_R)_x = 600 \cos 30^\circ N - 400 \sin 45^\circ N \\ &= 236.8 N \rightarrow \\ +\uparrow (F_R)_y &= \Sigma F_y; \quad (F_R)_y = 600 \sin 30^\circ N + 400 \cos 45^\circ N \\ &= 582.8 N \uparrow \end{aligned}$$

The resultant force, shown in Fig. 2–19c, has a *magnitude* of

$$\begin{aligned} F_R &= \sqrt{(236.8 N)^2 + (582.8 N)^2} \\ &= 629 N \end{aligned}$$
Ans.

From the vector addition,

$$\theta = \tan^{-1}\left(\frac{582.8 N}{236.8 N}\right) = 67.9^\circ$$
Ans.

SOLUTION II

Cartesian Vector Notation. From Fig. 2–19b, each force is first expressed as a Cartesian vector.


$$\begin{aligned} \mathbf{F}_1 &= \{600 \cos 30^\circ \mathbf{i} + 600 \sin 30^\circ \mathbf{j}\} N \\ \mathbf{F}_2 &= \{-400 \sin 45^\circ \mathbf{i} + 400 \cos 45^\circ \mathbf{j}\} N \end{aligned}$$

Then,


$$\begin{aligned} \mathbf{F}_R &= \mathbf{F}_1 + \mathbf{F}_2 = (600 \cos 30^\circ N - 400 \sin 45^\circ N)\mathbf{i} \\ &\quad + (600 \sin 30^\circ N + 400 \cos 45^\circ N)\mathbf{j} \\ &= \{236.8 \mathbf{i} + 582.8 \mathbf{j}\} N \end{aligned}$$

The magnitude and direction of \mathbf{F}_R are determined in the same manner as before.


NOTE: Comparing the two methods of solution, notice that the use of scalar notation is more efficient since the components can be found *directly*, without first having to express each force as a Cartesian vector before adding the components. Later, however, we will show that Cartesian vector analysis is very beneficial for solving three-dimensional problems.

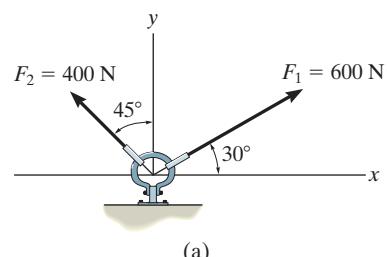


(a)

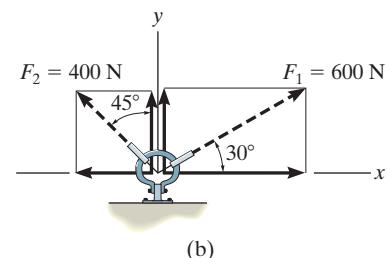


(b)

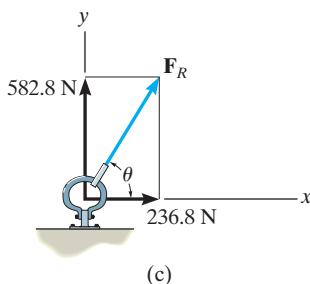**Fig. 2–19**

The end of the boom O in Fig. 2–20a is subjected to three concurrent and coplanar forces. Determine the magnitude and direction of the resultant force.

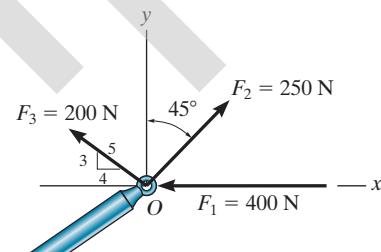

(a)

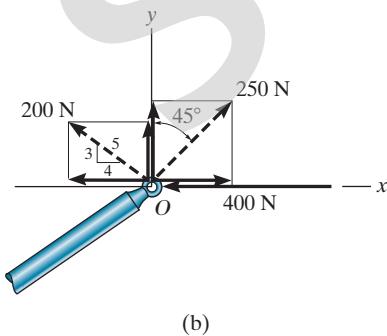

(b)

SOLUTION

Each force is resolved into its x and y components, Fig. 2–20b. Summing the x components, we have

$$\begin{aligned}\rightarrow (F_R)_x &= \Sigma F_x; & (F_R)_x &= -400 \text{ N} + 250 \sin 45^\circ \text{ N} - 200\left(\frac{4}{5}\right) \text{ N} \\ & & &= -383.2 \text{ N} = 383.2 \text{ N} \leftarrow\end{aligned}$$

The negative sign indicates that F_{Rx} acts to the left, i.e., in the negative x direction, as noted by the small arrow. Obviously, this occurs because F_1 and F_3 in Fig. 2–20b contribute a greater pull to the left than F_2 which pulls to the right. Summing the y components yields

$$\begin{aligned}+\uparrow (F_R)_y &= \Sigma F_y; & (F_R)_y &= 250 \cos 45^\circ \text{ N} + 200\left(\frac{3}{5}\right) \text{ N} \\ & & &= 296.8 \text{ N} \uparrow\end{aligned}$$

The resultant force, shown in Fig. 2–20c, has a *magnitude* of

$$\begin{aligned}F_R &= \sqrt{(-383.2 \text{ N})^2 + (296.8 \text{ N})^2} \\ &= 485 \text{ N}\end{aligned}$$

Ans.

From the vector addition in Fig. 2–20c, the direction angle θ is

$$\theta = \tan^{-1}\left(\frac{296.8}{383.2}\right) = 37.8^\circ$$

Ans.


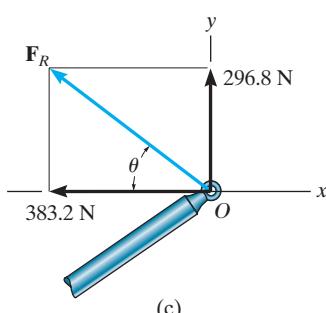


Fig. 2–20

NOTE: Application of this method is more convenient, compared to using two applications of the parallelogram law, first to add F_1 and F_2 then adding F_3 to this resultant.


FUNDAMENTAL PROBLEMS

F2-7. Resolve each force acting on the post into its x and y components.

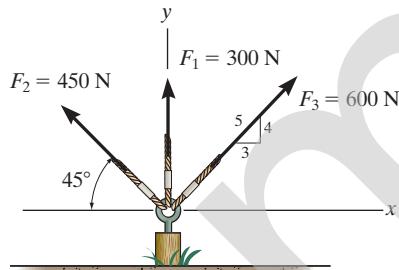


Prob. F2-7

F2-8. Determine the magnitude and direction of the resultant force.

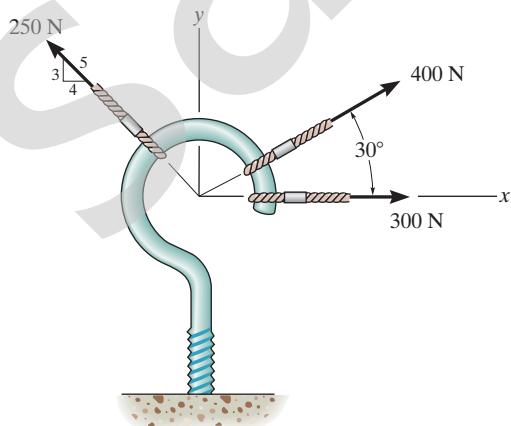


Prob. F2-8

F2-9. Determine the magnitude of the resultant force acting on the corbel and its direction θ measured counterclockwise from the x axis.

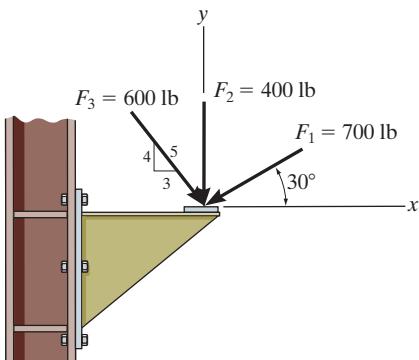


Prob. F2-9

F2-10. If the resultant force acting on the bracket is to be 750 N directed along the positive x axis, determine the magnitude of \mathbf{F} and its direction θ .

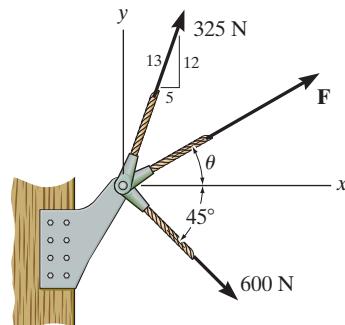


Prob. F2-10

F2-11. If the magnitude of the resultant force acting on the bracket is to be 80 lb directed along the u axis, determine the magnitude of \mathbf{F} and its direction θ .

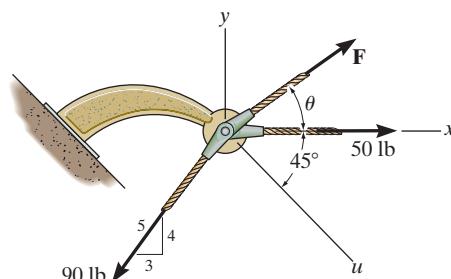

Prob. F2-11


F2-12. Determine the magnitude of the resultant force and its direction θ measured counterclockwise from the positive x axis.

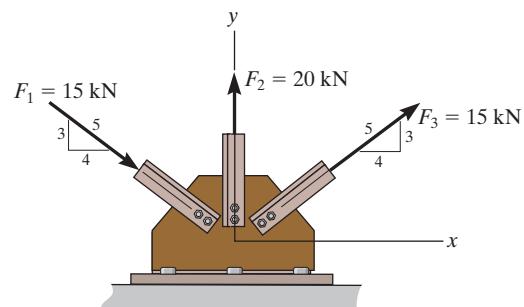

Prob. F2-12

PROBLEMS


***2–32.** Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

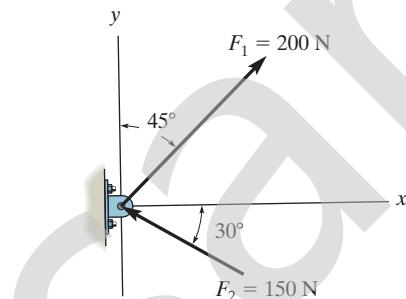

Prob. 2–32


2–34. Resolve \mathbf{F}_1 and \mathbf{F}_2 into their x and y components.

2–35. Determine the magnitude of the resultant force and its direction measured counterclockwise from the positive x axis.

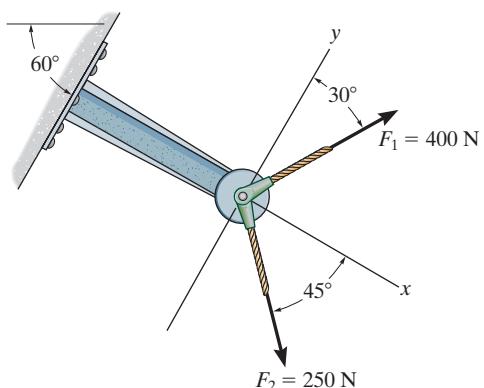

Probs. 2–34/35


2–33. Determine the magnitude of the resultant force and its direction, measured clockwise from the positive x axis.

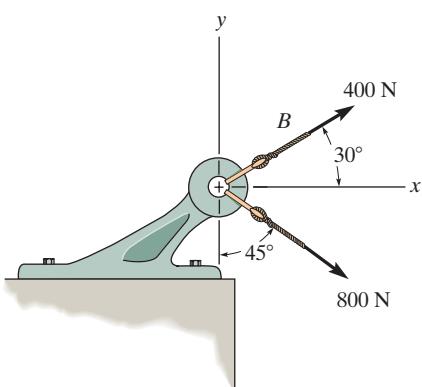

Prob. 2–33


***2–36.** Resolve each force acting on the *gusset plate* into its x and y components, and express each force as a Cartesian vector.

2–37. Determine the magnitude of the resultant force acting on the plate and its direction, measured counterclockwise from the positive x axis.

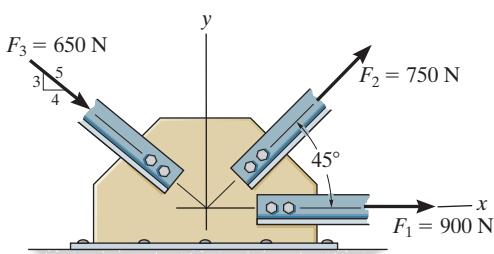

Probs. 2–36/37


- 2-38.** Express each of the three forces acting on the support in Cartesian vector form and determine the magnitude of the resultant force and its direction, measured clockwise from positive x axis.

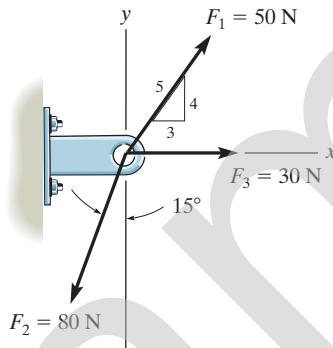

Prob. 2-38


- 2-39.** Determine the x and y components of \mathbf{F}_1 and \mathbf{F}_2 .

- *2-40.** Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

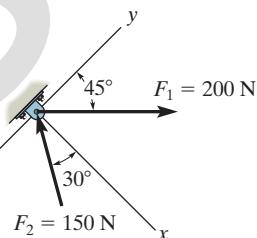

Probs. 2-39/40


- 2-41.** Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

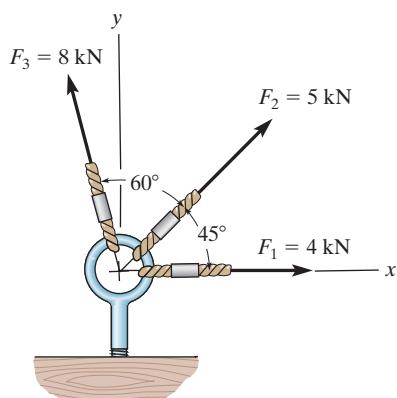

Prob. 2-41


- 2-42.** Express \mathbf{F}_1 , \mathbf{F}_2 , and \mathbf{F}_3 as Cartesian vectors.

- 2-43.** Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

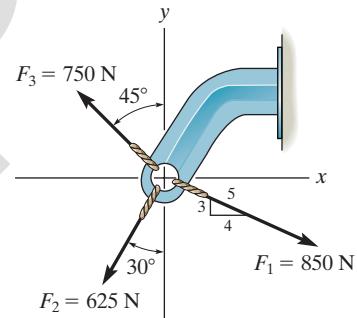


Probs. 2-42/43

- *2-44.** Determine the magnitude of the resultant force and its direction, measured clockwise from the positive x axis.

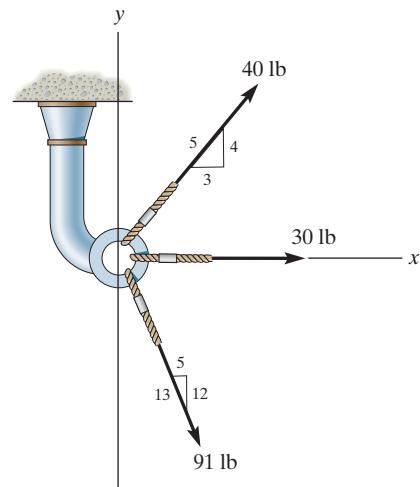

Prob. 2-44


- 2-45.** Determine the magnitude and direction θ of the resultant force \mathbf{F}_R . Express the result in terms of the magnitudes of the components \mathbf{F}_1 and \mathbf{F}_2 and the angle ϕ .

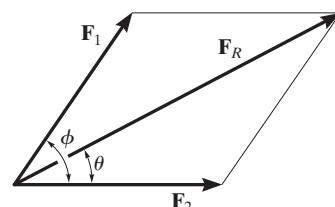

Prob. 2-45

2-46. Determine the magnitude and orientation θ of \mathbf{F}_B so that the resultant force is directed along the positive y axis and has a magnitude of 1500 N.


2-47. Determine the magnitude and orientation, measured counterclockwise from the positive y axis, of the resultant force acting on the bracket, if $F_B = 600$ N and $\theta = 20^\circ$.

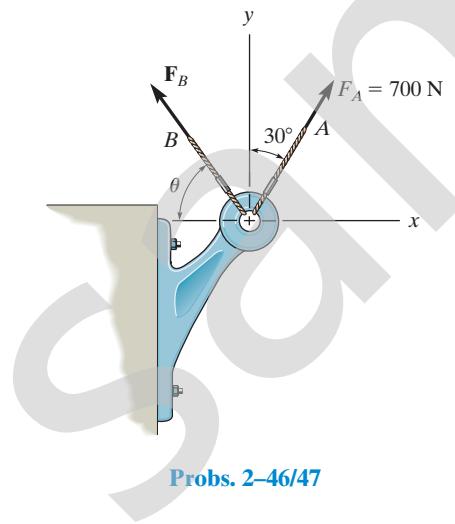

Probs. 2-46/47

***2-48.** Three forces act on the bracket. Determine the magnitude and direction θ of \mathbf{F}_1 so that the resultant force is directed along the positive x' axis and has a magnitude of 800 N.


2-49. If $F_1 = 300$ N and $\theta = 10^\circ$, determine the magnitude and direction, measured counterclockwise from the positive x' axis, of the resultant force acting on the bracket.

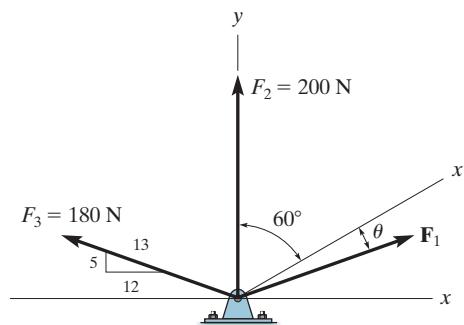

Probs. 2-48/49


2-50. Express \mathbf{F}_1 , \mathbf{F}_2 , and \mathbf{F}_3 as Cartesian vectors.

2-51. Determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

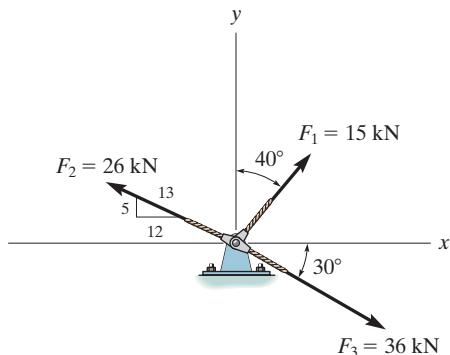

Probs. 2-50/51


***2-52.** Determine the x and y components of each force acting on the *gusset plate* of a bridge truss. Show that the resultant force is zero.

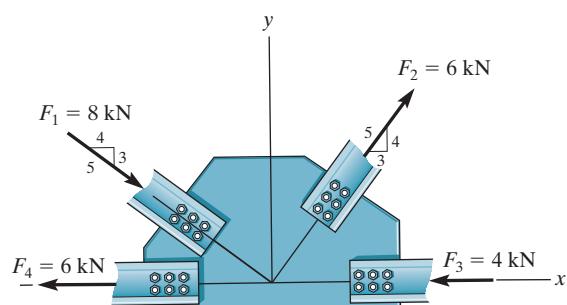

Prob. 2-52


2-53. Express \mathbf{F}_1 and \mathbf{F}_2 as Cartesian vectors.

2-54. Determine the magnitude of the resultant force and its direction measured counterclockwise from the positive x axis.

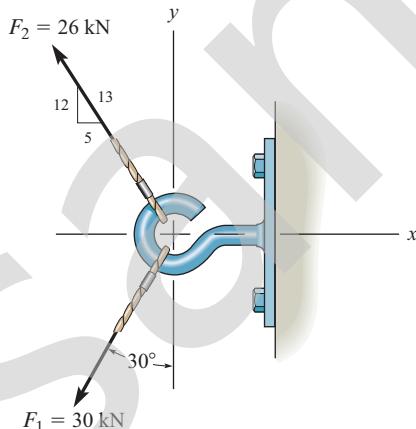

Probs. 2-53/54


2-55. Determine the magnitude of force \mathbf{F} so that the resultant force of the three forces is as small as possible. What is the magnitude of the resultant force?

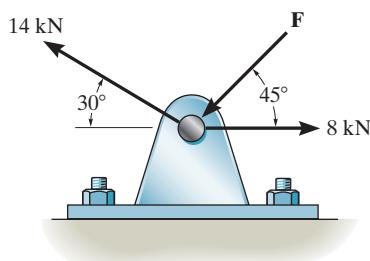

Prob. 2-55

***2-56.** If the magnitude of the resultant force acting on the bracket is to be 450 N directed along the positive u axis, determine the magnitude of \mathbf{F}_1 and its direction ϕ .


2-57. If the resultant force acting on the bracket is required to be a minimum, determine the magnitudes of \mathbf{F}_1 and the resultant force. Set $\phi = 30^\circ$.

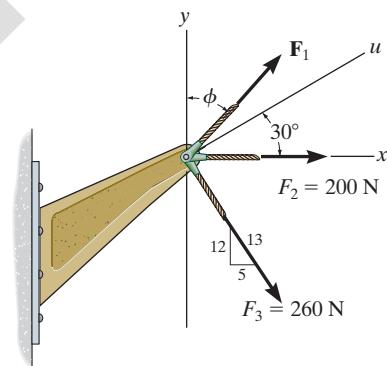

Probs. 2-56/57

2-58. Three forces act on the bracket. Determine the magnitude and direction θ of \mathbf{F} so that the resultant force is directed along the positive x' axis and has a magnitude of 8 kN.

2-59. If $F = 5$ kN and $\theta = 30^\circ$, determine the magnitude of the resultant force and its direction, measured counterclockwise from the positive x axis.

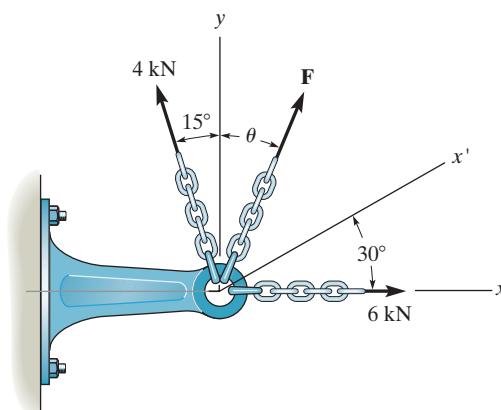

Prob. 2-58/59

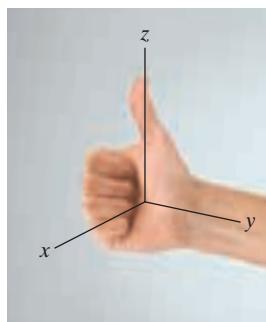


Fig. 2-21 (© Russell C. Hibbeler)

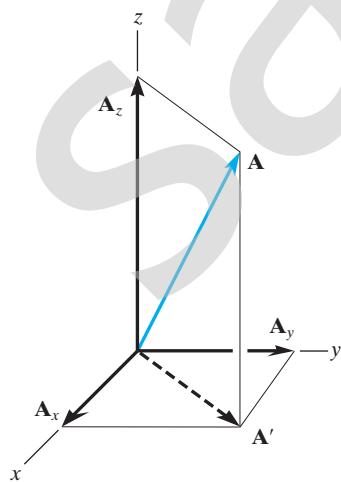


Fig. 2-22

2.5 Cartesian Vectors

The operations of vector algebra, when applied to solving problems in *three dimensions*, are greatly simplified if the vectors are first represented in Cartesian vector form. In this section we will present a general method for doing this; then in the next section we will use this method for finding the resultant force of a system of concurrent forces.

Right-Handed Coordinate System. We will use a right-handed coordinate system to develop the theory of vector algebra that follows. A rectangular coordinate system is said to be **right-handed** if the thumb of the right hand points in the direction of the positive z axis when the right-hand fingers are curled about this axis and directed from the positive x towards the positive y axis, Fig. 2-21.

Rectangular Components of a Vector. A vector \mathbf{A} may have one, two, or three rectangular components along the x , y , z coordinate axes, depending on how the vector is oriented relative to the axes. In general, though, when \mathbf{A} is directed within an octant of the x , y , z frame, Fig. 2-22, then by two successive applications of the parallelogram law, we may resolve the vector into components as $\mathbf{A} = \mathbf{A}' + \mathbf{A}_z$ and then $\mathbf{A}' = \mathbf{A}_x + \mathbf{A}_y$. Combining these equations, to eliminate \mathbf{A}' , \mathbf{A} is represented by the vector sum of its *three* rectangular components,

$$\mathbf{A} = \mathbf{A}_x + \mathbf{A}_y + \mathbf{A}_z \quad (2-2)$$

Cartesian Unit Vectors. In three dimensions, the set of Cartesian unit vectors, \mathbf{i} , \mathbf{j} , \mathbf{k} , is used to designate the directions of the x , y , z axes, respectively. As stated in Sec. 2-4, the *sense* (or arrowhead) of these vectors will be represented analytically by a plus or minus sign, depending on whether they are directed along the positive x , y , or z axes. The positive Cartesian unit vectors are shown in Fig. 2-23.

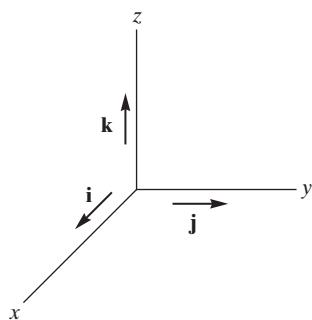


Fig. 2-23

Cartesian Vector Representation. Since the three components of \mathbf{A} in Eq. 2–2 act in the positive \mathbf{i} , \mathbf{j} , and \mathbf{k} directions, Fig. 2–24, we can write \mathbf{A} in Cartesian vector form as

$$\mathbf{A} = A_x \mathbf{i} + A_y \mathbf{j} + A_z \mathbf{k} \quad (2-3)$$

There is a distinct advantage to writing vectors in this manner. Separating the *magnitude* and *direction* of each *component vector* will simplify the operations of vector algebra, particularly in three dimensions.

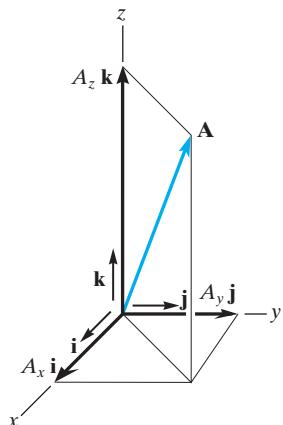


Fig. 2-24

Magnitude of a Cartesian Vector. It is always possible to obtain the magnitude of \mathbf{A} provided it is expressed in Cartesian vector form. As shown in Fig. 2–25, from the blue right triangle, $A = \sqrt{A'^2 + A_z^2}$, and from the gray right triangle, $A' = \sqrt{A_x^2 + A_y^2}$. Combining these equations to eliminate A' yields

$$A = \sqrt{A_x^2 + A_y^2 + A_z^2} \quad (2-4)$$

Hence, the magnitude of \mathbf{A} is equal to the positive square root of the sum of the squares of its components.

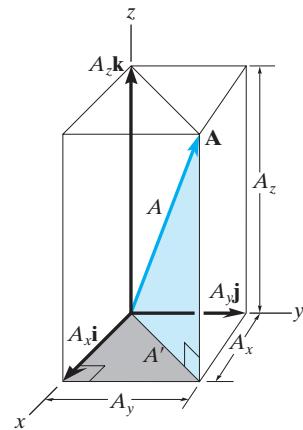


Fig. 2-25

Coordinate Direction Angles. We will define the *direction* of \mathbf{A} by the *coordinate direction angles* α (alpha), β (beta), and γ (gamma), measured between the *tail* of \mathbf{A} and the *positive* x , y , z axes provided they are located at the tail of \mathbf{A} , Fig. 2–26. Note that regardless of where \mathbf{A} is directed, each of these angles will be between 0° and 180° .

To determine α , β , and γ , consider the projection of \mathbf{A} onto the x , y , z axes, Fig. 2–27. Referring to the colored right triangles shown in the figure, we have

$$\cos \alpha = \frac{A_x}{A} \quad \cos \beta = \frac{A_y}{A} \quad \cos \gamma = \frac{A_z}{A} \quad (2-5)$$

These numbers are known as the *direction cosines* of \mathbf{A} . Once they have been obtained, the coordinate direction angles α , β , γ can then be determined from the inverse cosines.

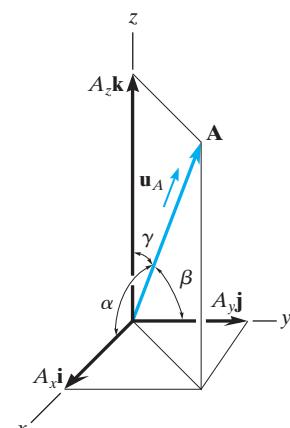


Fig. 2-26

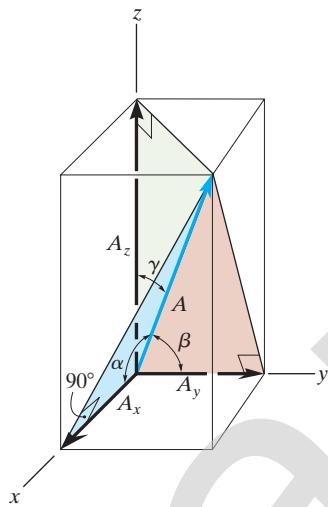


Fig. 2-27

An easy way of obtaining these direction cosines is to form a unit vector \mathbf{u}_A in the direction of A , Fig. 2-26. If \mathbf{A} is expressed in Cartesian vector form, $\mathbf{A} = A_x \mathbf{i} + A_y \mathbf{j} + A_z \mathbf{k}$, then \mathbf{u}_A will have a magnitude of one and be dimensionless provided \mathbf{A} is divided by its magnitude, i.e.,

$$\mathbf{u}_A = \frac{\mathbf{A}}{A} = \frac{A_x}{A} \mathbf{i} + \frac{A_y}{A} \mathbf{j} + \frac{A_z}{A} \mathbf{k} \quad (2-6)$$

where $A = \sqrt{A_x^2 + A_y^2 + A_z^2}$. By comparison with Eqs. 2-5, it is seen that the $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components of \mathbf{u}_A represent the direction cosines of \mathbf{A} , i.e.,

$$\mathbf{u}_A = \cos \alpha \mathbf{i} + \cos \beta \mathbf{j} + \cos \gamma \mathbf{k} \quad (2-7)$$

Since the magnitude of a vector is equal to the positive square root of the sum of the squares of the magnitudes of its components, and \mathbf{u}_A has a magnitude of one, then from the above equation an important relation among the direction cosines can be formulated as

$$\cos^2 \alpha + \cos^2 \beta + \cos^2 \gamma = 1 \quad (2-8)$$

Here we can see that if only *two* of the coordinate angles are known, the third angle can be found using this equation.

Finally, if the magnitude and coordinate direction angles of \mathbf{A} are known, then \mathbf{A} may be expressed in Cartesian vector form as

$$\begin{aligned} \mathbf{A} &= A \mathbf{u}_A \\ &= A \cos \alpha \mathbf{i} + A \cos \beta \mathbf{j} + A \cos \gamma \mathbf{k} \\ &= A_x \mathbf{i} + A_y \mathbf{j} + A_z \mathbf{k} \end{aligned} \quad (2-9)$$

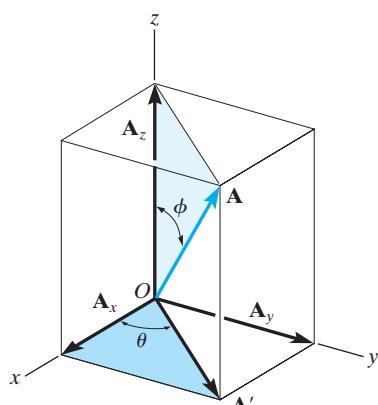


Fig. 2-28

Transverse and Azimuth Angles. Sometimes, the direction of \mathbf{A} can be specified using two angles, namely, a **transverse angle** θ and an **azimuth angle** ϕ (phi), such as shown in Fig. 2-28. The components of \mathbf{A} can then be determined by applying trigonometry first to the light blue right triangle, which yields

$$A_z = A \cos \phi$$

and

$$A' = A \sin \phi$$

Now applying trigonometry to the dark blue right triangle,

$$A_x = A' \cos \theta = A \sin \phi \cos \theta$$

$$A_y = A' \sin \theta = A \sin \phi \sin \theta$$

Therefore **A** written in Cartesian vector form becomes

$$\mathbf{A} = A \sin \phi \cos \theta \mathbf{i} + A \sin \phi \sin \theta \mathbf{j} + A \cos \phi \mathbf{k}$$

You should not memorize this equation, rather it is important to understand how the components were determined using trigonometry.

2.6 Addition of Cartesian Vectors

The addition (or subtraction) of two or more vectors is greatly simplified if the vectors are expressed in terms of their Cartesian components. For example, if $\mathbf{A} = A_x \mathbf{i} + A_y \mathbf{j} + A_z \mathbf{k}$ and $\mathbf{B} = B_x \mathbf{i} + B_y \mathbf{j} + B_z \mathbf{k}$, Fig. 2-29, then the resultant vector, \mathbf{R} , has components which are the scalar sums of the $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components of \mathbf{A} and \mathbf{B} , i.e.,

$$\mathbf{R} = \mathbf{A} + \mathbf{B} = (A_x + B_x) \mathbf{i} + (A_y + B_y) \mathbf{j} + (A_z + B_z) \mathbf{k}$$

If this is generalized and applied to a system of several concurrent forces, then the force resultant is the vector sum of all the forces in the system and can be written as

$$\mathbf{F}_R = \sum \mathbf{F} = \sum F_x \mathbf{i} + \sum F_y \mathbf{j} + \sum F_z \mathbf{k} \quad (2-10)$$

Here $\sum F_x$, $\sum F_y$, and $\sum F_z$ represent the algebraic sums of the respective x , y , z or $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components of each force in the system.

Important Points

- A Cartesian vector **A** has $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components along the x, y, z axes. If **A** is known, its magnitude is defined by $A = \sqrt{A_x^2 + A_y^2 + A_z^2}$.
- The direction of a Cartesian vector can be defined by the three angles α, β, γ , measured from the *positive* x, y, z axes to the *tail* of the vector. To find these angles formulate a unit vector in the direction of **A**, i.e., $\mathbf{u}_A = \mathbf{A}/A$, and determine the inverse cosines of its components. Only two of these angles are independent of one another; the third angle is found from $\cos^2 \alpha + \cos^2 \beta + \cos^2 \gamma = 1$.
- The direction of a Cartesian vector can also be specified using a transverse angle θ and azimuth angle ϕ .


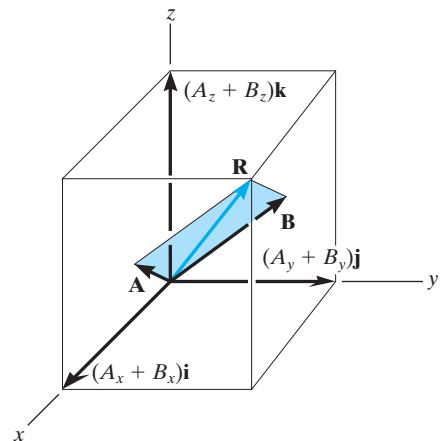


Fig. 2-29



Cartesian vector analysis provides a convenient method for finding both the resultant force and its components in three dimensions. (© Russell C. Hibbeler)

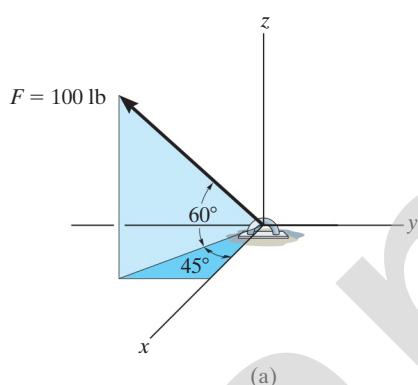

Express the force \mathbf{F} shown in Fig. 2-30a as a Cartesian vector.

SOLUTION

The angles of 60° and 45° defining the direction of \mathbf{F} are *not* coordinate direction angles. Two successive applications of the parallelogram law are needed to resolve \mathbf{F} into its x , y , z components. First $\mathbf{F} = \mathbf{F}' + \mathbf{F}_z$, then $\mathbf{F}' = \mathbf{F}_x + \mathbf{F}_y$, Fig. 2-30b. By trigonometry, the magnitudes of the components are

$$F_z = 100 \sin 60^\circ \text{ lb} = 86.6 \text{ lb}$$

$$\mathbf{F}' = 100 \cos 60^\circ \text{ lb} = 50 \text{ lb}$$

$$F_x = F' \cos 45^\circ = 50 \cos 45^\circ \text{ lb} = 35.4 \text{ lb}$$

$$F_y = F' \sin 45^\circ = 50 \sin 45^\circ \text{ lb} = 35.4 \text{ lb}$$

Realizing that \mathbf{F}_y has a direction defined by $-\mathbf{j}$, we have

$$\mathbf{F} = \{35.4\mathbf{i} - 35.4\mathbf{j} + 86.6\mathbf{k}\} \text{ lb}$$

Ans.

To show that the magnitude of this vector is indeed 100 lb, apply Eq. 2-4,

$$\begin{aligned} F &= \sqrt{F_x^2 + F_y^2 + F_z^2} \\ &= \sqrt{(35.4)^2 + (35.4)^2 + (86.6)^2} = 100 \text{ lb} \end{aligned}$$

If needed, the coordinate direction angles of \mathbf{F} can be determined from the components of the unit vector acting in the direction of \mathbf{F} . Hence,

$$\begin{aligned} \mathbf{u} &= \frac{\mathbf{F}}{F} = \frac{F_x}{F}\mathbf{i} + \frac{F_y}{F}\mathbf{j} + \frac{F_z}{F}\mathbf{k} \\ &= \frac{35.4}{100}\mathbf{i} - \frac{35.4}{100}\mathbf{j} + \frac{86.6}{100}\mathbf{k} \\ &= 0.354\mathbf{i} - 0.354\mathbf{j} + 0.866\mathbf{k} \end{aligned}$$

so that

$$\alpha = \cos^{-1}(0.354) = 69.3^\circ$$

$$\beta = \cos^{-1}(-0.354) = 111^\circ$$

$$\gamma = \cos^{-1}(0.866) = 30.0^\circ$$

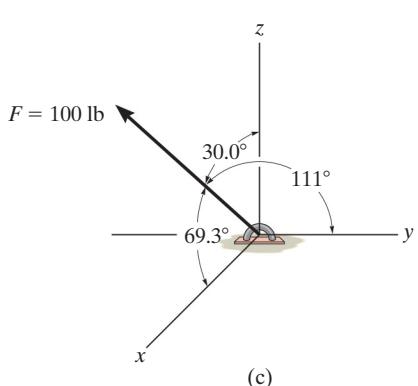
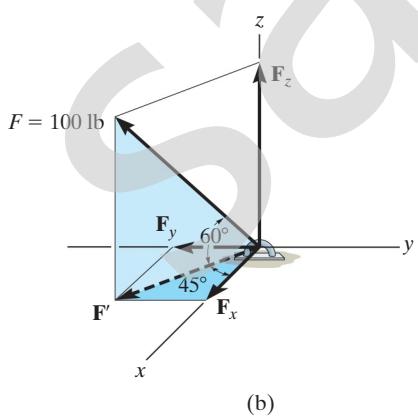


Fig. 2-30

These results are shown in Fig. 2-30c.

EXAMPLE 2.9

Two forces act on the hook shown in Fig. 2–31a. Specify the magnitude of \mathbf{F}_2 and its coordinate direction angles so that the resultant force \mathbf{F}_R acts along the positive y axis and has a magnitude of 800 N.

SOLUTION

To solve this problem, the resultant force \mathbf{F}_R and its two components, \mathbf{F}_1 and \mathbf{F}_2 , will each be expressed in Cartesian vector form. Then, as shown in Fig. 2–31b, it is necessary that $\mathbf{F}_R = \mathbf{F}_1 + \mathbf{F}_2$.

Applying Eq. 2–9,

$$\begin{aligned}\mathbf{F}_1 &= F_1 \cos \alpha_1 \mathbf{i} + F_1 \cos \beta_1 \mathbf{j} + F_1 \cos \gamma_1 \mathbf{k} \\ &= 300 \cos 45^\circ \mathbf{i} + 300 \cos 60^\circ \mathbf{j} + 300 \cos 120^\circ \mathbf{k} \\ &= \{212.1 \mathbf{i} + 150 \mathbf{j} - 150 \mathbf{k}\} \text{ N} \\ \mathbf{F}_2 &= F_{2x} \mathbf{i} + F_{2y} \mathbf{j} + F_{2z} \mathbf{k}\end{aligned}$$

Since \mathbf{F}_R has a magnitude of 800 N and acts in the $+j$ direction,

$$\mathbf{F}_R = (800 \text{ N})(+j) = \{800 \mathbf{j}\} \text{ N}$$

We require

$$\begin{aligned}\mathbf{F}_R &= \mathbf{F}_1 + \mathbf{F}_2 \\ 800 \mathbf{j} &= 212.1 \mathbf{i} + 150 \mathbf{j} - 150 \mathbf{k} + F_{2x} \mathbf{i} + F_{2y} \mathbf{j} + F_{2z} \mathbf{k} \\ 800 \mathbf{j} &= (212.1 + F_{2x}) \mathbf{i} + (150 + F_{2y}) \mathbf{j} + (-150 + F_{2z}) \mathbf{k}\end{aligned}$$

To satisfy this equation the $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components of \mathbf{F}_R must be equal to the corresponding $\mathbf{i}, \mathbf{j}, \mathbf{k}$ components of $(\mathbf{F}_1 + \mathbf{F}_2)$. Hence,

$$\begin{aligned}0 &= 212.1 + F_{2x} & F_{2x} &= -212.1 \text{ N} \\ 800 &= 150 + F_{2y} & F_{2y} &= 650 \text{ N} \\ 0 &= -150 + F_{2z} & F_{2z} &= 150 \text{ N}\end{aligned}$$

The magnitude of \mathbf{F}_2 is thus

$$\begin{aligned}F_2 &= \sqrt{(-212.1 \text{ N})^2 + (650 \text{ N})^2 + (150 \text{ N})^2} \\ &= 700 \text{ N} \quad \text{Ans.}\end{aligned}$$


We can use Eq. 2–9 to determine $\alpha_2, \beta_2, \gamma_2$.

$$\cos \alpha_2 = \frac{-212.1}{700}; \quad \alpha_2 = 108^\circ \quad \text{Ans.}$$

$$\cos \beta_2 = \frac{650}{700}; \quad \beta_2 = 21.8^\circ \quad \text{Ans.}$$

$$\cos \gamma_2 = \frac{150}{700}; \quad \gamma_2 = 77.6^\circ \quad \text{Ans.}$$

These results are shown in Fig. 2–31b.

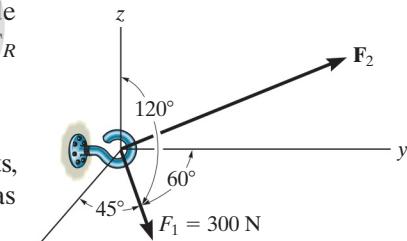

(a)

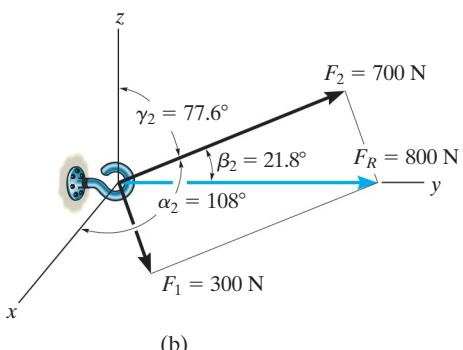


Fig. 2–31


PRELIMINARY PROBLEMS

P2–3. Sketch the following forces on the x, y, z coordinate axes. Show α, β, γ .

a) $\mathbf{F} = \{50\mathbf{i} + 60\mathbf{j} - 10\mathbf{k}\}$ kN


b) $\mathbf{F} = \{-40\mathbf{i} - 80\mathbf{j} + 60\mathbf{k}\}$ kN

P2–4. In each case, establish \mathbf{F} as a Cartesian vector, and find the magnitude of \mathbf{F} and the direction cosine of β .

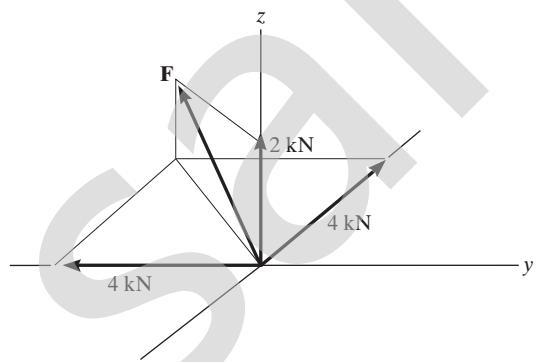


(a)


P2–5. Show how to resolve each force into its x, y, z components. Set up the calculation used to find the magnitude of each component.

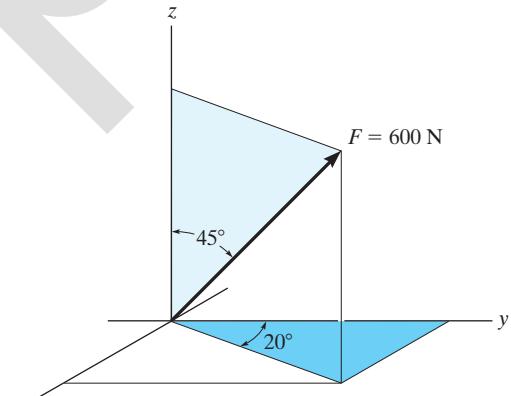

(a)

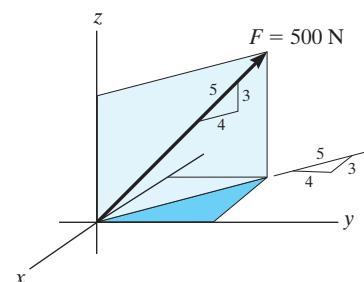


(b)

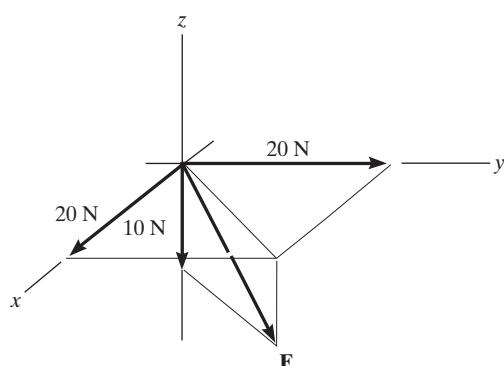


(b)

Prob. P2–4

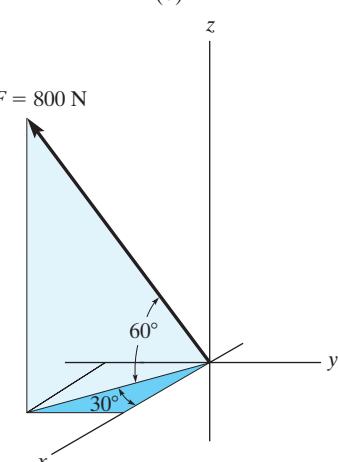(c)
Prob. P2–5


FUNDAMENTAL PROBLEMS

F2–13. Determine the coordinate direction angles of the force.

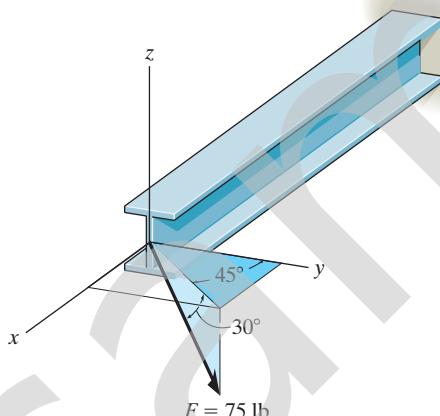


Prob. F2–13

F2–14. Express the force as a Cartesian vector.

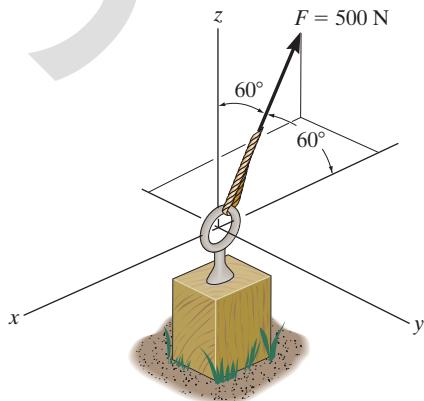


Prob. F2–14

F2–15. Express the force as a Cartesian vector.

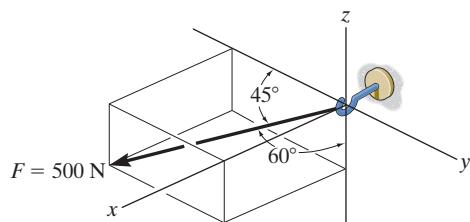


Prob. F2–15

F2–16. Express the force as a Cartesian vector.

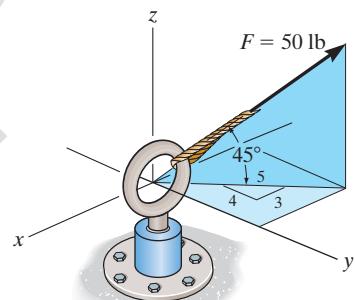


Prob. F2–16

F2–17. Express the force as a Cartesian vector.

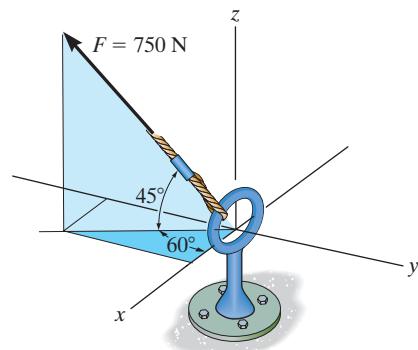

Prob. F2–17


F2–18. Determine the resultant force acting on the hook.

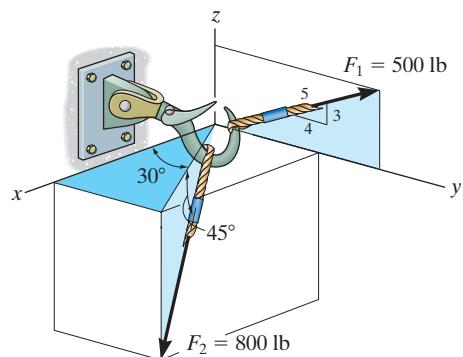

Prob. F2–18


PROBLEMS

- *2–60.** The force \mathbf{F} has a magnitude of 80 lb and acts within the octant shown. Determine the magnitudes of the x, y, z components of \mathbf{F} .

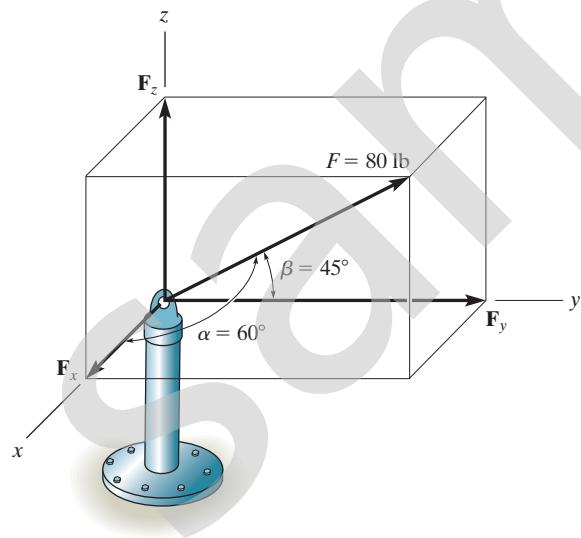


Prob. 2–60

- 2–61.** The bolt is subjected to the force \mathbf{F} , which has components acting along the x, y, z axes as shown. If the magnitude of \mathbf{F} is 80 N, and $\alpha = 60^\circ$ and $\gamma = 45^\circ$, determine the magnitudes of its components.

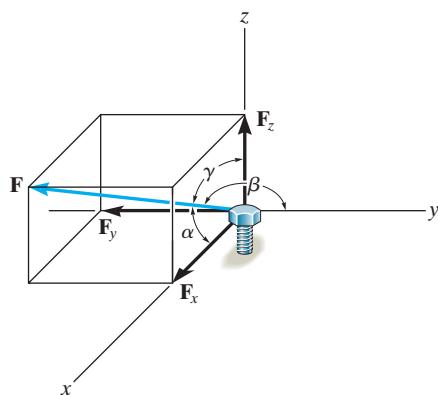

Prob. 2–61


- 2–62.** Determine the magnitude and coordinate direction angles of the force \mathbf{F} acting on the support. The component of \mathbf{F} in the x – y plane is 7 kN.

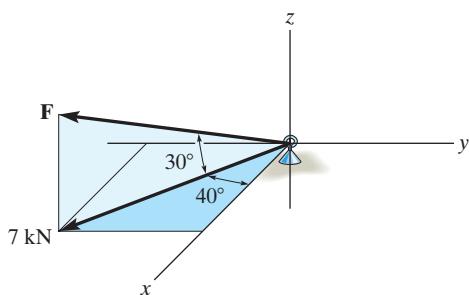

Prob. 2–62

- 2–63.** Determine the magnitude and coordinate direction angles of the resultant force and sketch this vector on the coordinate system.


- *2–64.** Specify the coordinate direction angles of \mathbf{F}_1 and \mathbf{F}_2 and express each force as a Cartesian vector.

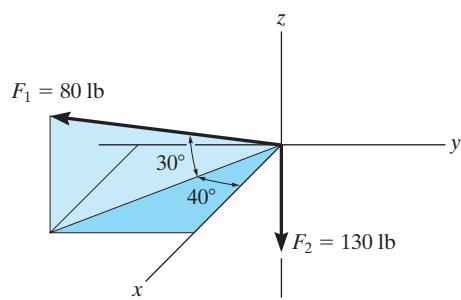

Probs. 2–63/64

2-65. The screw eye is subjected to the two forces shown. Express each force in Cartesian vector form and then determine the resultant force. Find the magnitude and coordinate direction angles of the resultant force.


2-66. Determine the coordinate direction angles of \mathbf{F}_1 .

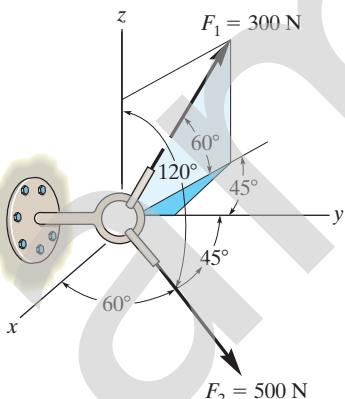

Probs. 2-65/66


2-67. Determine the magnitude and coordinate direction angles of \mathbf{F}_3 so that the resultant of the three forces acts along the positive y axis and has a magnitude of 600 lb.

***2-68.** Determine the magnitude and coordinate direction angles of \mathbf{F}_3 so that the resultant of the three forces is zero.

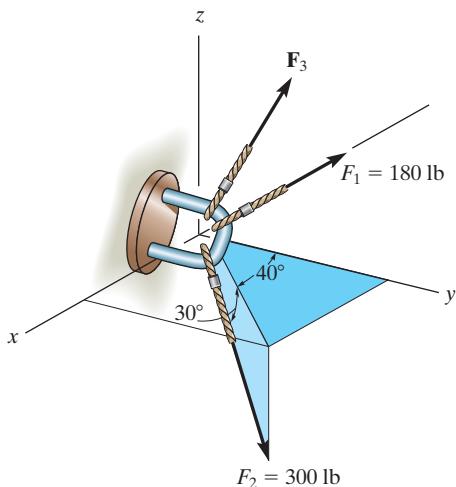


Probs. 2-67/68

2-69. Determine the magnitude and coordinate direction angles of the resultant force, and sketch this vector on the coordinate system.

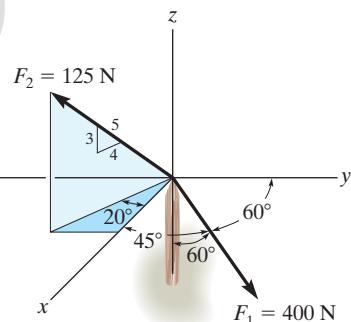


Prob. 2-69

2-70. Determine the magnitude and coordinate direction angles of the resultant force, and sketch this vector on the coordinate system.

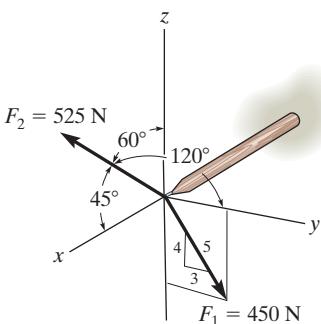


Prob. 2-70

2-71. Specify the magnitude and coordinate direction angles α_1 , β_1 , γ_1 of \mathbf{F}_1 so that the resultant of the three forces acting on the bracket is $\mathbf{F}_R = \{-350\mathbf{k}\}$ lb. Note that \mathbf{F}_3 lies in the x-y plane.

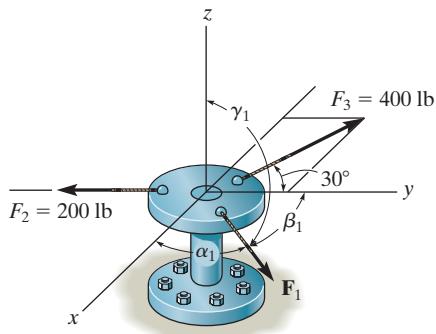

Prob. 2-71


- *2-72.** Two forces \mathbf{F}_1 and \mathbf{F}_2 act on the screw eye. If the resultant force \mathbf{F}_R has a magnitude of 150 lb and the coordinate direction angles shown, determine the magnitude of \mathbf{F}_2 and its coordinate direction angles.

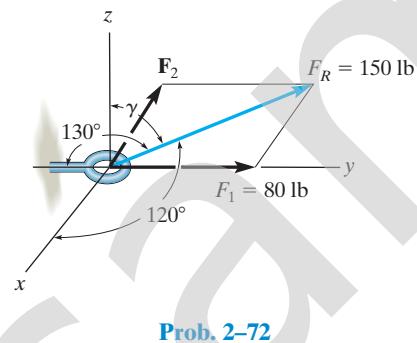

Prob. 2-72

- 2-75.** The spur gear is subjected to the two forces caused by contact with other gears. Express each force as a Cartesian vector.


- *2-76.** The spur gear is subjected to the two forces caused by contact with other gears. Determine the resultant of the two forces and express the result as a Cartesian vector.

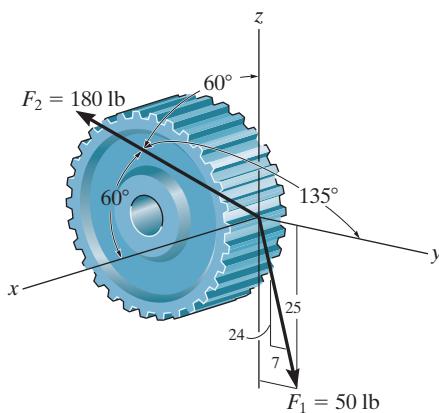

Probs. 2-75/76


- 2-73.** Express each force in Cartesian vector form.

- 2-74.** Determine the magnitude and coordinate direction angles of the resultant force, and sketch this vector on the coordinate system.

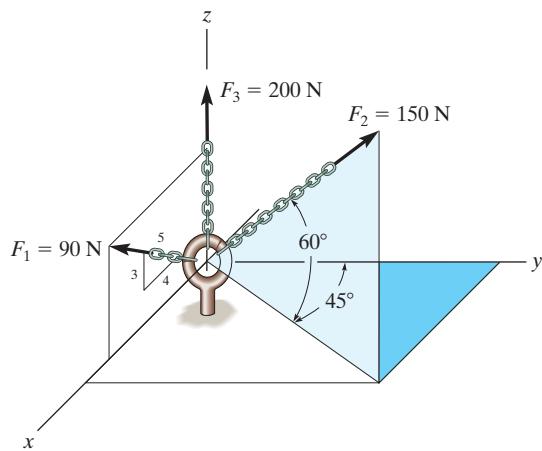

Probs. 2-73/74


- 2-77.** Determine the magnitude and coordinate direction angles of the resultant force, and sketch this vector on the coordinate system.

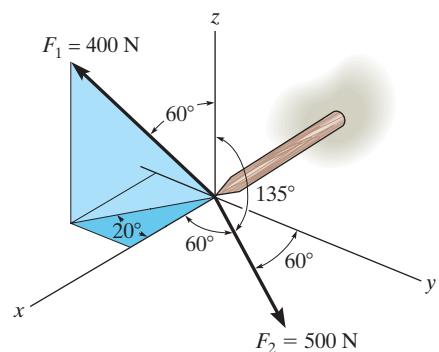

Prob. 2-77


2-78. The two forces \mathbf{F}_1 and \mathbf{F}_2 acting at A have a resultant force of $\mathbf{F}_R = \{-100\mathbf{k}\}$ lb. Determine the magnitude and coordinate direction angles of \mathbf{F}_2 .

2-79. Determine the coordinate direction angles of the force \mathbf{F}_1 and indicate them on the figure.

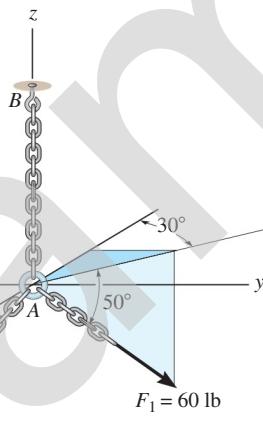

Probs. 2-78/79

***2-80.** The bracket is subjected to the two forces shown. Express each force in Cartesian vector form and then determine the resultant force \mathbf{F}_R . Find the magnitude and coordinate direction angles of the resultant force.

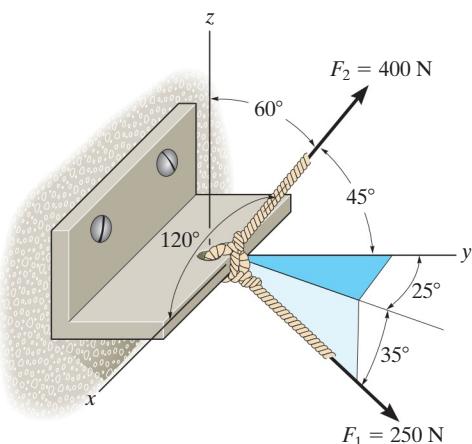


Prob. 2-80

2-81. If the coordinate direction angles for \mathbf{F}_3 are $\alpha_3 = 120^\circ$, $\beta_3 = 60^\circ$ and $\gamma_3 = 45^\circ$, determine the magnitude and coordinate direction angles of the resultant force acting on the eyebolt.

2-82. If the coordinate direction angles for \mathbf{F}_3 are $\alpha_3 = 120^\circ$, $\beta_3 = 45^\circ$, and $\gamma_3 = 60^\circ$, determine the magnitude and coordinate direction angles of the resultant force acting on the eyebolt.


2-83. If the direction of the resultant force acting on the eyebolt is defined by the unit vector $\mathbf{u}_{F_R} = \cos 30^\circ \mathbf{j} + \sin 30^\circ \mathbf{k}$, determine the coordinate direction angles of \mathbf{F}_3 and the magnitude of \mathbf{F}_R .

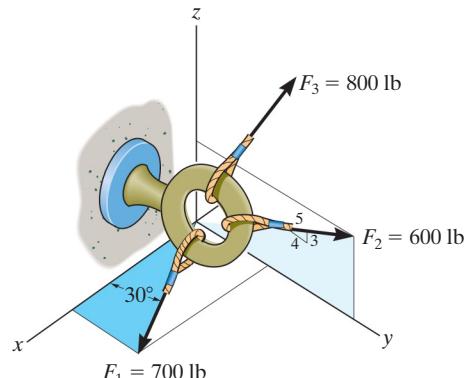

Probs. 2-81/82/83

***2-84.** The pole is subjected to the force \mathbf{F} , which has components acting along the x , y , z axes as shown. If the magnitude of \mathbf{F} is 3 kN, $\beta = 30^\circ$, and $\gamma = 75^\circ$, determine the magnitudes of its three components.

2-85. The pole is subjected to the force \mathbf{F} which has components $F_x = 1.5$ kN and $F_z = 1.25$ kN. If $\beta = 75^\circ$, determine the magnitudes of \mathbf{F} and F_y .

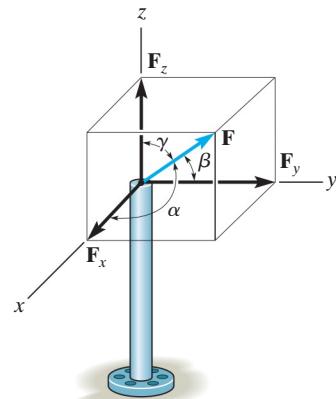

Probs. 2-84/85

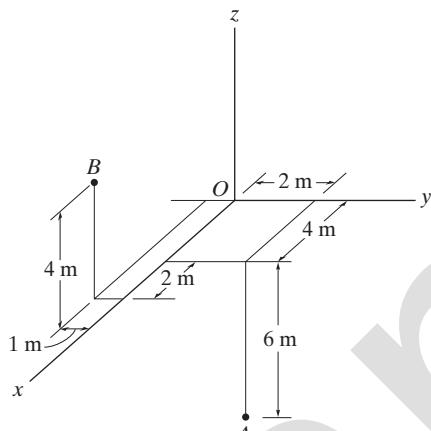


Fig. 2-32

2.7 Position Vectors

In this section we will introduce the concept of a position vector. It will be shown that this vector is of importance in formulating a Cartesian force vector directed between two points in space.

x, y, z Coordinates. Throughout the book we will use a *right-handed* coordinate system to reference the location of points in space. We will also use the convention followed in many technical books, which requires the positive z axis to be directed *upward* (the zenith direction) so that it measures the height of an object or the altitude of a point. The x , y axes then lie in the horizontal plane, Fig. 2-32. Points in space are located relative to the origin of coordinates, O , by successive measurements along the x , y , z axes. For example, the coordinates of point A are obtained by starting at O and measuring $x_A = +4$ m along the x axis, then $y_A = +2$ m along the y axis, and finally $z_A = -6$ m along the z axis, so that $A(4 \text{ m}, 2 \text{ m}, -6 \text{ m})$. In a similar manner, measurements along the x , y , z axes from O to B yield the coordinates of B , that is, $B(6 \text{ m}, -1 \text{ m}, 4 \text{ m})$.

Position Vector. A *position vector* \mathbf{r} is defined as a fixed vector which locates a point in space relative to another point. For example, if \mathbf{r} extends from the origin of coordinates, O , to point $P(x, y, z)$, Fig. 2-33a, then \mathbf{r} can be expressed in Cartesian vector form as

$$\mathbf{r} = x\mathbf{i} + y\mathbf{j} + z\mathbf{k}$$

Note how the head-to-tail vector addition of the three components yields vector \mathbf{r} , Fig. 2-33b. Starting at the origin O , one “travels” x in the $+\mathbf{i}$ direction, then y in the $+\mathbf{j}$ direction, and finally z in the $+\mathbf{k}$ direction to arrive at point $P(x, y, z)$.

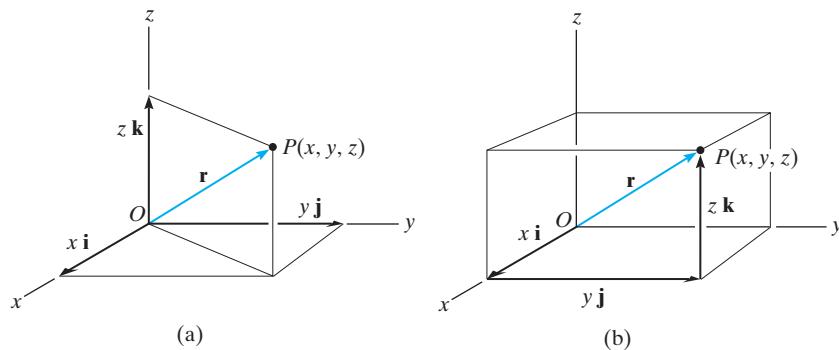


Fig. 2-33

In the more general case, the position vector may be directed from point A to point B in space, Fig. 2-34a. This vector is also designated by the symbol \mathbf{r} . As a matter of convention, we will *sometimes* refer to this vector with *two subscripts* to indicate from and to the point where it is directed. Thus, \mathbf{r} can also be designated as \mathbf{r}_{AB} . Also, note that \mathbf{r}_A and \mathbf{r}_B in Fig. 2-34a are referenced with only one subscript since they extend from the origin of coordinates.

From Fig. 2-34a, by the head-to-tail vector addition, using the triangle rule, we require

$$\mathbf{r}_A + \mathbf{r} = \mathbf{r}_B$$


Solving for \mathbf{r} and expressing \mathbf{r}_A and \mathbf{r}_B in Cartesian vector form yields

$$\mathbf{r} = \mathbf{r}_B - \mathbf{r}_A = (x_B \mathbf{i} + y_B \mathbf{j} + z_B \mathbf{k}) - (x_A \mathbf{i} + y_A \mathbf{j} + z_A \mathbf{k})$$


or

$$\mathbf{r} = (x_B - x_A) \mathbf{i} + (y_B - y_A) \mathbf{j} + (z_B - z_A) \mathbf{k} \quad (2-11)$$


Thus, the \mathbf{i} , \mathbf{j} , \mathbf{k} components of the position vector \mathbf{r} may be formed by taking the coordinates of the tail of the vector $A(x_A, y_A, z_A)$ and subtracting them from the corresponding coordinates of the head $B(x_B, y_B, z_B)$. We can also form these components directly, Fig. 2-34b, by starting at A and moving through a distance of $(x_B - x_A)$ along the positive x axis ($+\mathbf{i}$), then $(y_B - y_A)$ along the positive y axis ($+\mathbf{j}$), and finally $(z_B - z_A)$ along the positive z axis ($+\mathbf{k}$) to get to B .

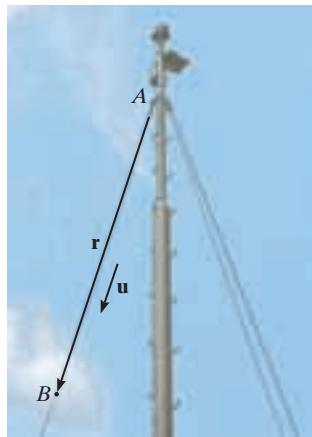

If an x , y , z coordinate system is established, then the coordinates of two points A and B on the cable can be determined. From this the position vector \mathbf{r} acting along the cable can be formulated. Its magnitude represents the distance from A to B , and its unit vector, $\mathbf{u} = \mathbf{r}/r$, gives the direction defined by α , β , γ .
© Russell C. Hibbeler

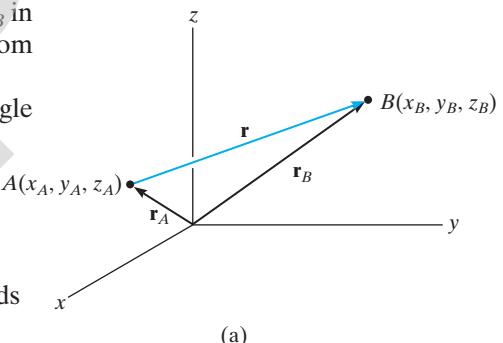

(a)

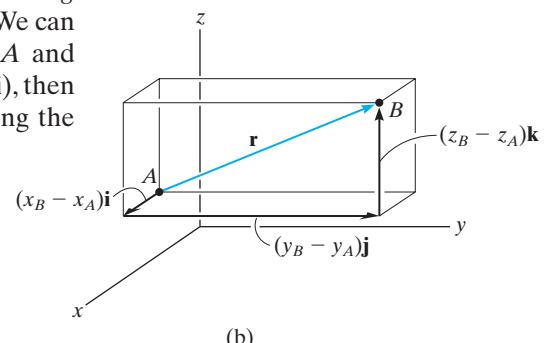

(b)

Fig. 2-34

EXAMPLE | 2.10

An elastic rubber band is attached to points A and B as shown in Fig. 2–35a. Determine its length and its direction measured from A toward B .

SOLUTION

We first establish a position vector from A to B , Fig. 2–35b. In accordance with Eq. 2–11, the coordinates of the tail $A(1 \text{ m}, 0, -3 \text{ m})$ are subtracted from the coordinates of the head $B(-2 \text{ m}, 2 \text{ m}, 3 \text{ m})$, which yields

$$\begin{aligned}\mathbf{r} &= [-2 \text{ m} - 1 \text{ m}] \mathbf{i} + [2 \text{ m} - 0] \mathbf{j} + [3 \text{ m} - (-3 \text{ m})] \mathbf{k} \\ &= \{-3\mathbf{i} + 2\mathbf{j} + 6\mathbf{k}\} \text{ m}\end{aligned}$$

These components of \mathbf{r} can also be determined *directly* by realizing that they represent the direction and distance one must travel along each axis in order to move from A to B , i.e., along the x axis $\{-3\mathbf{i}\}$ m, along the y axis $\{2\mathbf{j}\}$ m, and finally along the z axis $\{6\mathbf{k}\}$ m.

The length of the rubber band is therefore

$$r = \sqrt{(-3 \text{ m})^2 + (2 \text{ m})^2 + (6 \text{ m})^2} = 7 \text{ m} \quad \text{Ans.}$$

Formulating a unit vector in the direction of \mathbf{r} , we have


$$\mathbf{u} = \frac{\mathbf{r}}{r} = -\frac{3}{7}\mathbf{i} + \frac{2}{7}\mathbf{j} + \frac{6}{7}\mathbf{k}$$

The components of this unit vector give the coordinate direction angles


$$\alpha = \cos^{-1}\left(-\frac{3}{7}\right) = 115^\circ \quad \text{Ans.}$$

$$\beta = \cos^{-1}\left(\frac{2}{7}\right) = 73.4^\circ \quad \text{Ans.}$$

$$\gamma = \cos^{-1}\left(\frac{6}{7}\right) = 31.0^\circ \quad \text{Ans.}$$

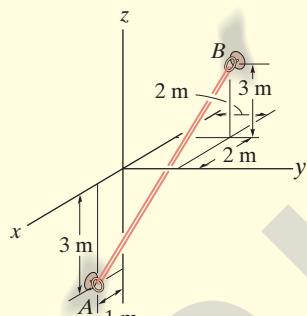

(a)

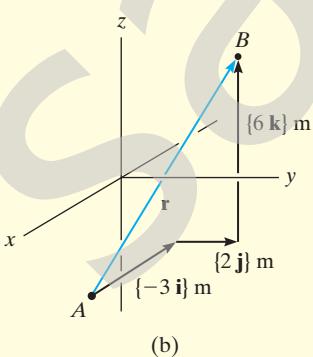

(b)

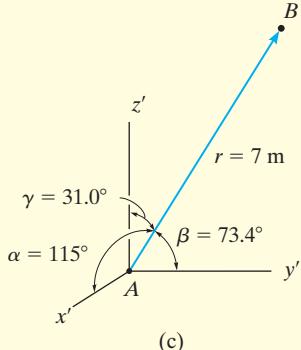


Fig. 2–35

NOTE: These angles are measured from the *positive axes* of a localized coordinate system placed at the tail of \mathbf{r} , as shown in Fig. 2–35c.

2.8 Force Vector Directed Along a Line

Quite often in three-dimensional statics problems, the direction of a force is specified by two points through which its line of action passes. Such a situation is shown in Fig. 2-36, where the force \mathbf{F} is directed along the cord AB . We can formulate \mathbf{F} as a Cartesian vector by realizing that it has the *same direction* and *sense* as the position vector \mathbf{r} directed from point A to point B on the cord. This common direction is specified by the **unit vector** $\mathbf{u} = \mathbf{r}/r$. Hence,

$$\mathbf{F} = F\mathbf{u} = F\left(\frac{\mathbf{r}}{r}\right) = F\left(\frac{(x_B - x_A)\mathbf{i} + (y_B - y_A)\mathbf{j} + (z_B - z_A)\mathbf{k}}{\sqrt{(x_B - x_A)^2 + (y_B - y_A)^2 + (z_B - z_A)^2}}\right)$$

Although we have represented \mathbf{F} symbolically in Fig. 2-36, note that it has *units of force*, unlike \mathbf{r} , which has units of length.

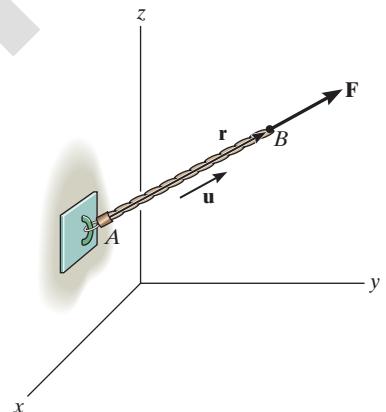


Fig. 2-36




The force \mathbf{F} acting along the rope can be represented as a Cartesian vector by establishing x , y , z axes and first forming a position vector \mathbf{r} along the length of the rope. Then the corresponding unit vector $\mathbf{u} = \mathbf{r}/r$ that defines the direction of both the rope and the force can be determined. Finally, the magnitude of the force is combined with its direction, $\mathbf{F} = F\mathbf{u}$. (© Russell C. Hibbeler)

Important Points

- A position vector locates one point in space relative to another point.
- The easiest way to formulate the components of a position vector is to determine the distance and direction that must be traveled along the x , y , z directions—going from the tail to the head of the vector.
- A force \mathbf{F} acting in the direction of a position vector \mathbf{r} can be represented in Cartesian form if the unit vector \mathbf{u} of the position vector is determined and it is multiplied by the magnitude of the force, i.e., $\mathbf{F} = F\mathbf{u} = F(\mathbf{r}/r)$.

EXAMPLE | 2.11

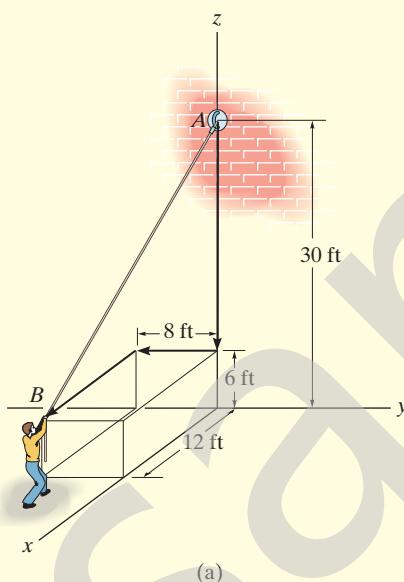

The man shown in Fig. 2–37a pulls on the cord with a force of 70 lb. Represent this force acting on the support A as a Cartesian vector and determine its direction.

SOLUTION

Force \mathbf{F} is shown in Fig. 2–37b. The *direction* of this vector, \mathbf{u} , is determined from the position vector \mathbf{r} , which extends from A to B. Rather than using the coordinates of the end points of the cord, \mathbf{r} can be determined *directly* by noting in Fig. 2–37a that one must travel from A {−24k} ft, then {−8j} ft, and finally {12i} ft to get to B. Thus,

$$\mathbf{r} = \{12\mathbf{i} - 8\mathbf{j} - 24\mathbf{k}\} \text{ ft}$$

The magnitude of \mathbf{r} , which represents the *length* of cord AB, is

$$r = \sqrt{(12 \text{ ft})^2 + (-8 \text{ ft})^2 + (-24 \text{ ft})^2} = 28 \text{ ft}$$

Forming the unit vector that defines the direction and sense of both \mathbf{r} and \mathbf{F} , we have

$$\mathbf{u} = \frac{\mathbf{r}}{r} = \frac{12}{28} \mathbf{i} - \frac{8}{28} \mathbf{j} - \frac{24}{28} \mathbf{k}$$

Since \mathbf{F} has a *magnitude* of 70 lb and a *direction* specified by \mathbf{u} , then

$$\begin{aligned} \mathbf{F} &= F\mathbf{u} = 70 \text{ lb} \left(\frac{12}{28} \mathbf{i} - \frac{8}{28} \mathbf{j} - \frac{24}{28} \mathbf{k} \right) \\ &= \{30\mathbf{i} - 20\mathbf{j} - 60\mathbf{k}\} \text{ lb} \end{aligned} \quad \text{Ans.}$$

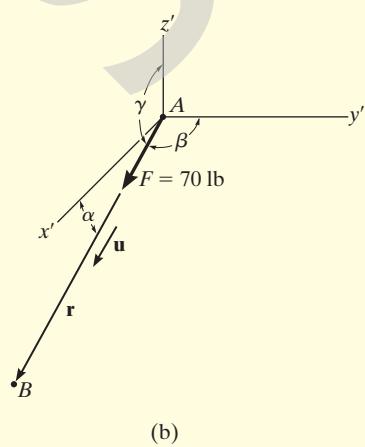


Fig. 2–37

$$\alpha = \cos^{-1}\left(\frac{12}{28}\right) = 64.6^\circ \quad \text{Ans.}$$

$$\beta = \cos^{-1}\left(\frac{-8}{28}\right) = 107^\circ \quad \text{Ans.}$$

$$\gamma = \cos^{-1}\left(\frac{-24}{28}\right) = 149^\circ \quad \text{Ans.}$$

NOTE: These results make sense when compared with the angles identified in Fig. 2–37b.

EXAMPLE | 2.12



(© Russell C. Hibbeler)

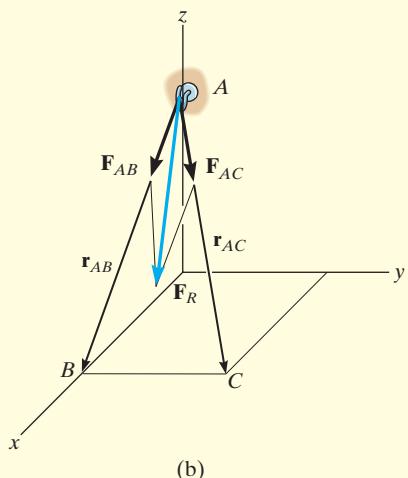
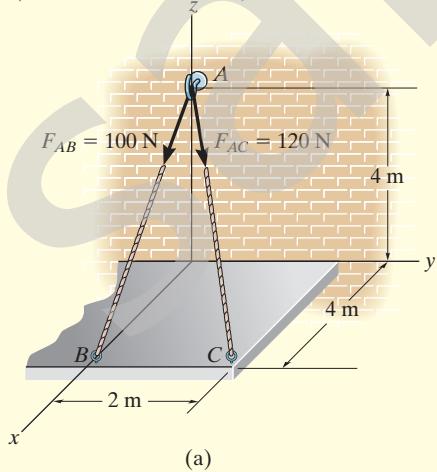


Fig. 2-38

The roof is supported by cables as shown in the photo. If the cables exert forces $F_{AB} = 100 \text{ N}$ and $F_{AC} = 120 \text{ N}$ on the wall hook at A as shown in Fig. 2-38a, determine the resultant force acting at A. Express the result as a Cartesian vector.

SOLUTION

The resultant force \mathbf{F}_R is shown graphically in Fig. 2-38b. We can express this force as a Cartesian vector by first formulating \mathbf{F}_{AB} and \mathbf{F}_{AC} as Cartesian vectors and then adding their components. The directions of \mathbf{F}_{AB} and \mathbf{F}_{AC} are specified by forming unit vectors \mathbf{u}_{AB} and \mathbf{u}_{AC} along the cables. These unit vectors are obtained from the associated position vectors \mathbf{r}_{AB} and \mathbf{r}_{AC} . With reference to Fig. 2-38a, to go from A to B, we must travel $\{-4\mathbf{k}\}$ m, and then $\{4\mathbf{i}\}$ m. Thus,

$$\mathbf{r}_{AB} = \{4\mathbf{i} - 4\mathbf{k}\} \text{ m}$$

$$r_{AB} = \sqrt{(4 \text{ m})^2 + (-4 \text{ m})^2} = 5.66 \text{ m}$$

$$\mathbf{F}_{AB} = F_{AB} \left(\frac{\mathbf{r}_{AB}}{r_{AB}} \right) = (100 \text{ N}) \left(\frac{4}{5.66} \mathbf{i} - \frac{4}{5.66} \mathbf{k} \right)$$

$$\mathbf{F}_{AB} = \{70.7\mathbf{i} - 70.7\mathbf{k}\} \text{ N}$$

To go from A to C, we must travel $\{-4\mathbf{k}\}$ m, then $\{2\mathbf{j}\}$ m, and finally $\{4\mathbf{i}\}$. Thus,

$$\mathbf{r}_{AC} = \{4\mathbf{i} + 2\mathbf{j} - 4\mathbf{k}\} \text{ m}$$

$$r_{AC} = \sqrt{(4 \text{ m})^2 + (2 \text{ m})^2 + (-4 \text{ m})^2} = 6 \text{ m}$$

$$\begin{aligned} \mathbf{F}_{AC} &= F_{AC} \left(\frac{\mathbf{r}_{AC}}{r_{AC}} \right) = (120 \text{ N}) \left(\frac{4}{6} \mathbf{i} + \frac{2}{6} \mathbf{j} - \frac{4}{6} \mathbf{k} \right) \\ &= \{80\mathbf{i} + 40\mathbf{j} - 80\mathbf{k}\} \text{ N} \end{aligned}$$

The resultant force is therefore

$$\mathbf{F}_R = \mathbf{F}_{AB} + \mathbf{F}_{AC} = \{70.7\mathbf{i} - 70.7\mathbf{k}\} \text{ N} + \{80\mathbf{i} + 40\mathbf{j} - 80\mathbf{k}\} \text{ N}$$

$$= \{151\mathbf{i} + 40\mathbf{j} - 151\mathbf{k}\} \text{ N} \quad \text{Ans.}$$

EXAMPLE | 2.13

The force in Fig. 2–39a acts on the hook. Express it as a Cartesian vector.

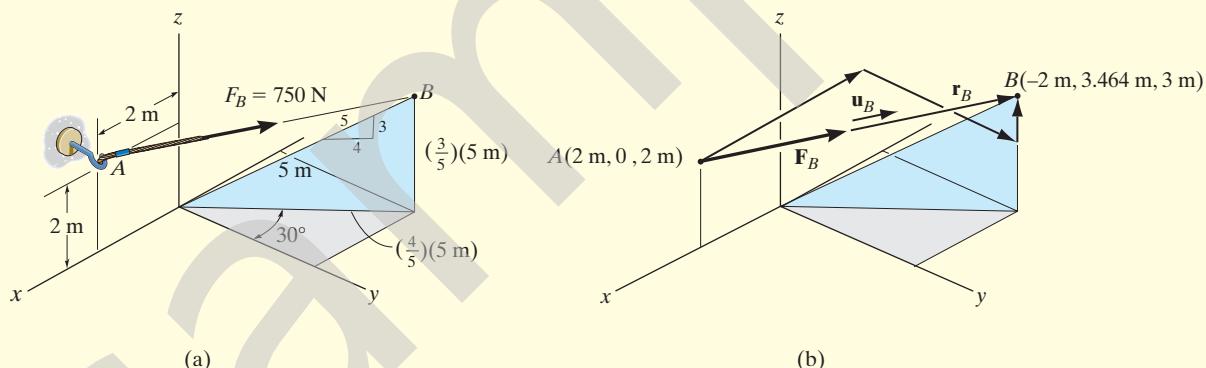


Fig. 2–39

SOLUTION

As shown in Fig. 2–39b, the coordinates for points *A* and *B* are

$$A(2 \text{ m}, 0, 2 \text{ m})$$

and

$$B\left[-\left(\frac{4}{5}\right)5 \sin 30^\circ \text{ m}, \left(\frac{4}{5}\right)5 \cos 30^\circ \text{ m}, \left(\frac{3}{5}\right)5 \text{ m}\right]$$

or

$$B(-2 \text{ m}, 3.464 \text{ m}, 3 \text{ m})$$

Therefore, to go from *A* to *B*, one must travel $\{-4\mathbf{i}\}$ m, then $\{3.464\mathbf{j}\}$ m, and finally $\{1\mathbf{k}\}$ m. Thus,

$$\begin{aligned} \mathbf{u}_B &= \left(\frac{\mathbf{r}_B}{r_B}\right) = \frac{\{-4\mathbf{i} + 3.464\mathbf{j} + 1\mathbf{k}\} \text{ m}}{\sqrt{(-4 \text{ m})^2 + (3.464 \text{ m})^2 + (1 \text{ m})^2}} \\ &= -0.7428\mathbf{i} + 0.6433\mathbf{j} + 0.1857\mathbf{k} \end{aligned}$$




Force \mathbf{F}_B expressed as a Cartesian vector becomes

$$\mathbf{F}_B = F_B \mathbf{u}_B = (750 \text{ N})(-0.7428\mathbf{i} + 0.6433\mathbf{j} + 0.1857\mathbf{k})$$

$$= \{-557\mathbf{i} + 482\mathbf{j} + 139\mathbf{k}\} \text{ N} \quad \text{Ans.}$$


PRELIMINARY PROBLEMS

P2–6. In each case, establish a position vector from point A to point B .

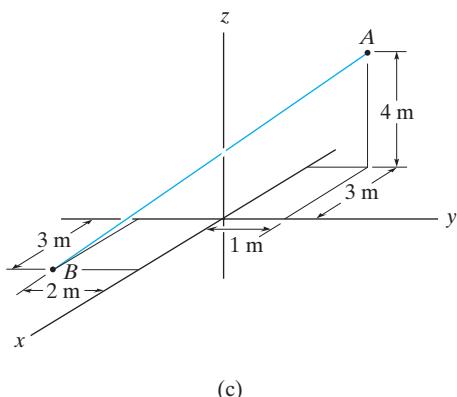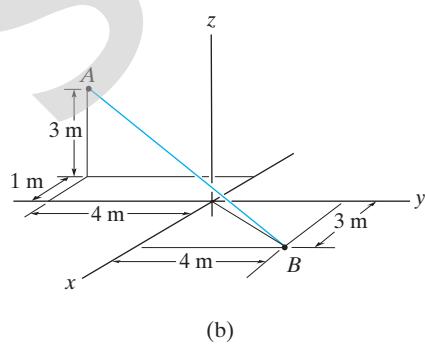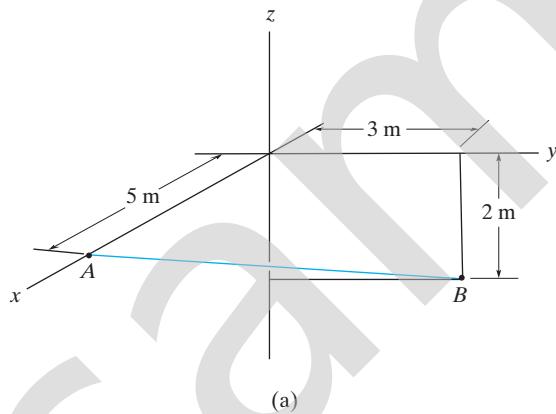


Prob. P2–6


P2–7. In each case, express \mathbf{F} as a Cartesian vector.

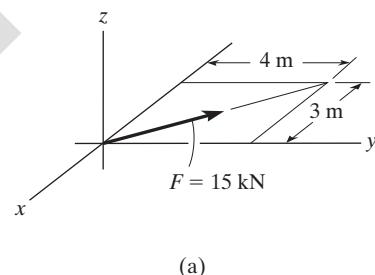

(a)

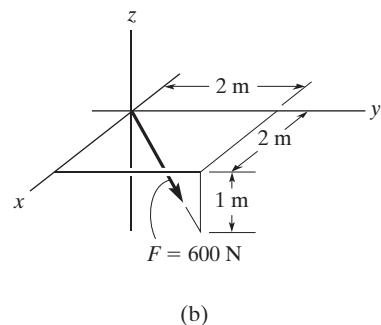

(b)

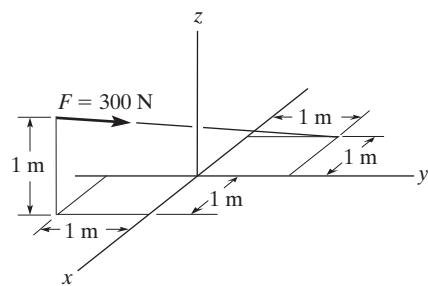

(c)

Prob. P2–7